

South Bank, Teesworks, Redcar


Detailed Quantitative Risk Assessment

South Tees Development Corporation

Document Ref: 10035117-AUK-XX-XX-RP-ZZ-0331-02-SB_DQRA

Revision: 02

SEPTEMBER 2021

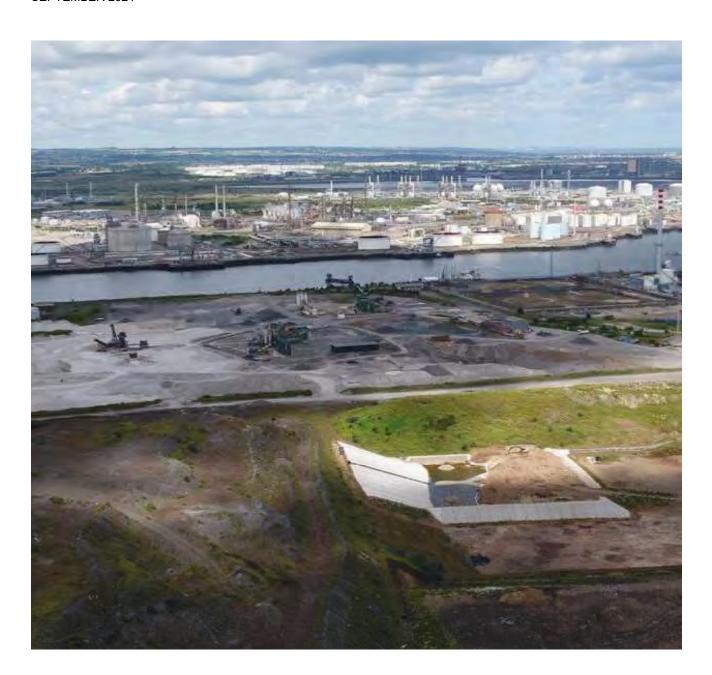

Contacts



NEIL THURSTON Project Director

dd +44 (0)113 845300 m +44 (0)7870 572824 e Neil.Thurston@arcadis.com Arcadis.

1 Whitehall Riverside
Leeds LS1 4BN
United Kingdom

www.arcadis.com 2

South Bank, Teesworks, Redcar

Detailed Quantitative Risk Assessment

Author Simon Hay

Checker Simon Hay

Reviewer Katy Baker

Approver Neil Thurston

Document Ref. 10035117-AUK-XX-XX-RP-ZZ-0331-01-SB_DQRA

Date JULY 2021

Version Control

Version	Date	Author	Checker	Reviewer	Approver	Changes
DRAFT	July 2021	SH	SH	КВ	NT	
02	September 2021	SH	SH	KB	NT	

This report dated 17 September 2021 has been prepared for South Tees Development Corporation (the "Client") in accordance with the terms and conditions of appointment dated 14 September 2017(the "Appointment") between the Client and **Arcadis UK** ("Arcadis") for the purposes specified in the Appointment. For avoidance of doubt, no other person(s) may use or rely upon this report or its contents, and Arcadis accepts no responsibility for any such use or reliance thereon by any other third party.

Executive Summary	
Background	Arcadis Consulting (UK) Limited (Arcadis) was commissioned by South Tees Development Corporation to undertake a Detailed Quantitative Risk Assessment (DQRA) at the South Bank Area (SB, "the site"), situated at the Teesworks, located within the industrial area generally known as 'South Tees', TS10 5QW (indicative postcode).
	The South Tees Regeneration Masterplan has been developed detailing the industrial-led regeneration of the Teesworks into a world class employment-generating zone and economic growth enabler for the Tees Valley.
	South Bank comprises three main areas, A, B & C (SBA, SBB and SBC), which have each been investigated as part of a site wide strategy for assessing the South Bank Area and wider South Tees development area. It also encompasses the recently investigated South Bank Coke Ovens (SBCO) area which lies predominantly within SBA.
Site Description	The entirety of SB is reclaimed land from the River Tees Estuary. The Made Ground used for the land reclamation is primarily composed of by-products from surrounding industrial processes, including slag.
	A number potentially contaminative historical land uses have occurred at SB. These include, but are not limited to, the SBCO, fuel storage (including Heavy Fuel Oil [HFO] tanks), metal and galvanizing works, phosphate works, basic slag works and rail sidings and stocking.
	Environmental Site Assessment (ESA) reports for the three main areas of SBA, SBB and SBC have been completed. The ESAs for SBA, SBB and SBC include a Generic Quantitative Risk Assessment (GQRA) undertaken by Arcadis. A Ground Investigation and GQRA Report was also undertaken by Royal Haskoning which covers the quayside areas of SBA and SBB.
Previous Environmental Works	The conclusions of the GQRA undertaken were that concentrations of arsenic, lead, benzene, dibenzofuran, 1,2 dichloroethane and polycyclic aromatic hydrocarbons (PAHs) were measured exceeding the GAC in soil for the protection of human health. It was recommended that risks to human health are considered at the design stage of any proposed redevelopment with regards to dermal, ingestion and inhalation pathways. In relation to water resources, several exceedances of WQS were measured on site, primarily relating to those wells screening the Made Ground and the Tidal Flat Deposits.
	In addition to the recent 2020/2021 investigations, investigations were also completed in 2004 and 1999 by Enviros and AEG respectively. Given the age of these investigations, and the coverage of the recent 2021 investigations, the DQRA was primarily based upon the 2020/2021 data.
	To further assess the contaminant of concern (CoC) identified as exceeding the relevant water quality standards (WQS) in the GQRAs undertaken by Arcadis and Royal Haskoning.
	The DQRA focuses on water resource receptors, specifically, the River Tees is located just beyond the northern border of the site. The scope of the water resource DQRA includes:
Scope and Objectives	 Assessment of the potential risk posed to water resources using a source-pathway-receptor approach to refine the existing conceptual site model (CSM); and, Evaluation of the need for remediation works to be undertaken.
	In relation to human health, the GQRA undertaken is considered to provide an appropriate level of assessment based on what is known of the planned redevelopment scenario. Therefore, human health assessment has not been included within the scope of the DQRA.
	Geology
Site Setting	The site is underlain by Made Ground of up to 11.6m thickness, comprising mainly slag dominated material and typically highly granular in nature. Made ground is underlain by

superficial deposits of Tidal Flat Deposits, comprising a mix of sands and silts. Beneath the Tidal Flat deposits, the layering of superficial deposits varies across the site but includes Glaciolacustrine Deposits, Glacial Till and sands and gravels (potentially weathered bedrock). Beneath the superficial deposits is bedrock of the Mercia Mudstone.

Hydrogeology

The Tidal Flat Deposits and the Mercia Mudstone are designated as Secondary A and Secondary B aquifers respectively. The remaining units identified are classified as unproductive strata.

Groundwater beneath the site was measured resting within the Made Ground, with a flow direction in the Made Ground towards the north/northeast, towards the River Tees.

Hydrology

The River Tees is present approximately 20m to the north of the site boundary. The River Tees is a tidal estuary, flowing towards the northeast. The Teesmouth and Cleveland Coast is also a designated Ramsar site, Site of Special Scientific Interest (SSSI) and a Special Protection Area (SPA).

Potential sources of contamination exist on site associated with the Made Ground and historical use of the site. Review of the contaminant distribution identified two sources to assess:

- Made Ground source from across the site considered to comprise a single diffuse soil source associated with Made Ground and slag.
- Groundwater source in the vicinity of SBC_AUK_BH110 considered to represent contamination associated with the SBCO area and also the location of identified non-aqueous phase liquid (NAPL).

Diffuse groundwater contaminants found throughout the site associated with Made Ground include metals, hydrocarbons including PAH, inorganics including cyanide, ammonia and sulphate and other organic compounds such as phenolics.

Groundwater contaminants associated with SBCO include metals, hydrocarbons (including tars), PAH, inorganics including cyanide, ammonia and sulphate and other volatile and semi-volatile organic compounds.

The following pathways are considered potentially active in relation to water resource receptors:

- Leaching of CoC from soil into groundwater
- Migration in groundwater through the Made Ground towards the surface water receptor (River Tees Estuary) and subsequent dilution within the receptor
- Vertical migration of impacts down relic foundation piles is also considered potentially active.

The primary water resource receptor associated with the site was considered to be The River Tees. The Teesmouth and Cleveland Estuary itself is designated Ramsar site, SPA and a SSSI.

Groundwater was not assessed as a receptor at significant risk based the industrial history of the site and its surroundings, the brackish nature of the groundwater due to proximity to the estuary and the low potential for groundwater abstraction for potable water in the future. The resource potential for the underlying aquifers is therefore considered to be very low.

The majority of contamination was identified in Made Ground and upper granular Tidal Flat Deposits. Contamination in the deeper underlying Tidal Flat Deposits and Mudstone are limited and localised, indicating that vertical migration into these units is limited.

The Groundwater Source was modelled in the SBA DQRA (Arcadis, 2021d), which concluded that measured concentrations from the modelled Groundwater Source did not

Sources

Pathways

Receptors

Modelling Approach

represent a significant risk to the primary water resource receptor (River Tees). As no changes have been made to the conceptual understanding of this area, and no additional groundwater monitoring has been undertaken, the findings of the SBA DQRA were considered to remain valid and not re-assessed.

As such, only the Made Ground Source was assessed in this DQRA. Made Ground was identified as present across the site and likely present immediately adjacent to the River Tees. This is considered a conservative assumption, given a sheet pile wall may be present in future, potentially reducing the flow of groundwater from the site towards the river. A lateral migration pathway along which contaminant attenuation may occur was not modelled.

Groundwater was identified resting within the base of the Made Ground. Due to the relatively high permeability of the Made Ground compared to the underlying natural geology, Made Ground was modelled as the primary unit from which discharge into the River Tees occurs.

The assessment was undertaken in two stages, with the second stage undertaken dependent on the outcome of Stage 1:

- 1. Measured concentrations of contaminants in groundwater representing those with potential to enter the River Tees were directly compared with saline EQS.
- Further to this, Site Specific Assessment Criteria (SSAC) were calculated taking into account a dilution factor within the River Tees.

The assessment was undertaken based on contaminants measured above the laboratory method detection limit (MDL) in 67 wells sampled to date from across the site. Measured concentrations of contaminants from the 67 groundwater monitoring wells sampled from across the site were compared to the assessment criteria as an initial assessment.

Seventeen monitoring wells were installed along the northern boundary of the site, prior to the River Tees. These were described in the DQRA as "sentinel wells" and are considered to provide the best representation of groundwater potentially entering the River Tees due to their location at the northern of the site - in particular those screening Made Ground and upper granular portions of the Tidal Flat Deposits. As such, the groundwater quality data specifically from the sentinel wells were used to further discuss the potential risk presented to the receptor (River Tees), based on the findings of the initial assessment.

Given the diffuse nature of contamination in the Made Ground from across the site, the absence of significant spatial distribution trends, the relatively permeable nature of the Made Ground, absence of hardstanding and the significant length of time the Made Ground has been present, concentrations of contaminants in sentinel wells were considered unlikely to increase further over time and to be at "steady state". This supported the use of the sentinel wells to further evaluate the risk to the River Tees from the site.

Stage 1

Multiple CoC including metals and inorganics, hydrocarbons and organic compounds exceeded the EQS in groundwater in both the sentinel wells and from the wider site. This represents a point of compliance immediately prior to the River Tees.

Stage 2

Water Resource DQRA Outcome

Dilution in the receiving surface water body (River Tees) was further considered by the calculation of groundwater-surface water SSAC. This assessment indicated that a limited number of contaminants, sampled from the 67 wells from across the site, exceeded the SSAC derived including hydrocarbons (TPH and PAH), phenols, cyanide, thiocyanate and ammoniacal nitrogen.

Several of the site wide wells where the SSAC were exceeded, were in the area of the SBCO or hydraulically down gradient. Review of the distribution indicated that the contaminants exceeding the SSAC in these wells were likely associated with a localised source around SBCO, rather than the Made Ground across the site. The majority of the

contaminants in this area were assessed in the SBA DQRA (Arcadis, 2021d) which concluded that a significant risk to water resources was not present based on the attenuation occurring during lateral migration and subsequent dilution in the River Tees.

Review of the remaining wells (excluding sentinel wells) indicated that a single contaminant was exceeding at most locations, in some instances during only one out of three visits. These locations were relatively distant from the River Tees and screening lower permeability natural geology. The influence of concentrations associated with these wells on down gradient groundwater quality and the River Tees was considered to be limited.

Further assessment of the potential risk to the River Tees was undertaken by comparison of measured concentrations from the 17 sentinel wells only, representing potential concentrations entering the river.

Ammoniacal nitrogen, thiocyanate and benzo(a)pyrene exceeded the SSAC in the sentinel wells. Across the three monitoring rounds, measured concentrations of ammoniacal nitrogen, thiocyanate and benzo(a)pyrene exceed the SSAC with dilution in seven, five and two out of the 17 locations monitored respectively.

The SSAC for thiocyanate and ammoniacal nitrogen were reviewed based on the localised nature of the contamination identified by the reduction of the source width (from 5,000m to account for Made Ground across the wider Redcar site to 800m and 500m to account for a source specific to South Bank for ammoniacal nitrogen and thiocyanate respectively). Review of the revised SSAC in combination with additional lines of evidence (including review of compliance criteria and conservatisms in dilution approach used) indicated that measured concentrations of ammoniacal nitrogen and thiocyanate do not present a significant risk to the River Tees.

Benzo(a)pyrene exceeded the SSAC in two of the sentinel wells. Further assessment of the three rounds of monitoring undertaken indicated that concentrations were generally below the SSAC and only marginally above on a single occasion and therefore unlikely to present a significant level of risk to the River Tees.

Based on the findings of the SBA DQRA (Arcadis, 2021d) and the review of the CSM undertaken in this DQRA, the Groundwater Source in the area of SBA_AUK_BH110 (interpreted to be associated with the SBCO), is not considered to present a significant risk to the identified water resource receptor (River Tees).

The findings of the water resource assessment for the Made Ground Source undertaken in this DQRA concludes that the site does not present a significant risk to the identified water resource receptor, the River Tees.

This assessment supersedes the assessment of the Made Ground source undertaken in the first issue of the SBA DQRA (Arcadis, 2021d). The findings of this DQRA concur with the SBA DQRA, that the Made Ground does not present a significant level of risk to the identified water resource receptor (River Tees).

The criteria developed in this assessment may potentially be used to assess other areas of the Teesworks where Made Ground is a single source. However, first a detailed conceptual review of any areas assessed in future needs to be undertaken. In particular, confirming sources, pathways and receptors remain applicable.

Non-aqueous Phase Liquid has been recorded on site. This may require consideration as part of remediation works however, dissolved phase concentrations indicate that NAPL is not presenting a risk to water resources.

A potential pathway due to piled foundations was identified under the pollutant linkages. Based on the findings of the contaminant distribution and underlying ground conditions, it is considered unlikely that this pathway could represent a significant risk to water resources. Although contamination may locally be able to enter the underlying natural deposits around piles, lateral migration within the unit is unlikely to be significant.

Conclusions

Other Considerations

It is recommended that risks to human health are also considered at the design stage of any proposed redevelopment based on the findings of the GQRA with regards to dermal, ingestion and inhalation pathways.

Contents

1	Introduction	10
2	Summary of Previous Environmental Work	12
3	Potentially Active Pollutant Linkages	21
4	Site Characterisation	23
5	Detailed Quantitative Risk Assessment	32
6	Conclusions	43
7	References	44

Tables

- Table 1 Selection of Contaminants of Concern to Model
- Table 2 Water Resources Site Specific Assessment Criteria
- Table 3 Comparison of Measured Groundwater Concentrations with EQS and SSAC

Figures

- Figure 1 Site Location Plan and Environmental Setting
- Figure 2 Monitoring Well Location Plan
- Figure 3a-3af Contaminant Distribution Plots
- Figure 4 Conceptual Site Model Cross Section

Appendices

Appendix A

Study Limitations

Appendix B

Sensitivity Assessment

Appendix C

Physical Input Parameters

Appendix D

Risk Assessment Methodology

1 Introduction

Arcadis Consulting (UK) Limited (Arcadis) was commissioned by South Tees Development Corporation to undertake a Detailed Quantitative Risk Assessment (DQRA) at the South Bank Area (SB, "the site"), situated at the Teesworks, located within the industrial area generally known as 'South Tees', TS10 5QW (indicative postcode).

The site location plan is presented on Figure 1, which also indicates the main areas of the site.

1.1 Background

The South Bank Area comprises three main areas, A, B & C (SBA, SBB and SBC), which have each been investigated as part of a site wide strategy for assessing the South Bank Area and wider South Tees development area. It also encompasses the recently investigated South Bank Coke Ovens (SBCO) area which lies predominantly within SBA, with a portion in SBC and a portion outside both SBA and SBC. The SBB area encloses a plot of land leased by Tarmac (Hanson Concrete) which was not included in the investigations.

This report follows on from Environmental Site Assessment (ESA) reports for the three main areas of South Bank. The ESA for SBA, SBB and SBC include a Generic Quantitative Risk Assessment (GQRA) undertaken by Arcadis (Arcadis, 2021a; 2021b & 2021c). A Ground Investigation and GQRA Report was also undertaken by Royal Haskoning (Royal Haskoning, 2021) which covers the quayside areas of SBA and SBB.

A DQRA was undertaken by Arcadis for SBA (Arcadis, 2021d) after completion of the ESA for SBA and quayside investigation by Royal Haskoning. This DQRA builds on the findings of the SBA DQRA, encompassing the wider area SB site. In addition to the wider area scope of this DQRA, trial pit investigations in the SBCO area have also recently undertaken (Arcadis, 2021c). In the SBA DQRA (2021d), the SBCO area was a data gap.

This report should therefore be read in conjunction with the three Arcadis ESA reports, Royal Haskoning Ground Investigation report and SBA DQRA.

This DQRA further assesses the potential risk to water resource receptors from contaminants of concern (CoC) identified in the GQRAs that have exceeded the water quality standards (WQS). The potential risk to human health is discussed but is not further assessed based on the findings of the GQRA and project status.

All works have been carried out in reference to English legislation and regulatory guidance for the assessment of land contamination.

1.2 Planning Process

The South Tees Regeneration Masterplan has already been developed, detailing the industrial-led regeneration of the Teesworks into a world class employment-generating zone and economic growth enabler for the Tees Valley.

The Masterplan has identified SB (also formerly known as Cleveland North) as being located within the Southern Industrial Zone. The site is a priority development area and Arcadis understands outline planning has been submitted for "demolition of existing structures on site and the development of up to 418,000 sqm (gross) of general industry (use class B2) and storage or distribution facilities (use class B8) with office accommodation (use class B1), HGV and car parking and associated infrastructure works all matters reserved other than access" (Ref. R/2020/0357/OOM).

Planning has also been granted for "Demolition of structures and engineering operations associated with ground preparation and temporary storage of soils and its final use in the remediation and preparation of land for regeneration and development" (R/2019/0427/FFM).

This report is to be used to support the ongoing planning process at the site.

1.3 Objectives

The objective of this DQRA is to further assess the CoC identified as exceeding the relevant WQS in the GQRAs undertaken by Arcadis and Royal Haskoning. The DQRA focuses on potential risks to water resources, specifically, the River Tees which is located just beyond the northern border of the site. This report will help refine the present conceptual site model (CSM) and define potential risks posed to the River Tees by the measured concentration of CoC in groundwater. This should in turn inform any remedial strategy that may be required based on the outcome of the DQRA and the planning process.

1.4 Scope of Works

The scope of works to meet the objectives comprised the below undertakings.

Production of a DQRA:

- Assessment of the potential risk posed to water resources using a source-pathway-receptor approach to refine the existing CSM; and,
- Evaluation of the need for remediation works to be undertaken.

1.5 Reliability of Information / Limitations

The following scenarios are not considered in the derivation of site-specific assessment criteria (SSAC):

- Risks to Construction Workers any redevelopment and construction work should be conducted in full recognition of HS(G)66 (no longer current but has not been updated and is cited in The Building Regulations, 2010) and with reference to CIRIA Report 132; and,
- Nuisance health effects the Statutory Nuisance Act considers olfactory impacts from odours and allows comparison of enclosed space air concentrations with odour threshold concentrations.

Arcadis' liability, pursuant to the terms of the appointment of Arcadis by South Tees Development Corporation, is strictly limited to the work undertaken and the matters contained and specifically referred to in this report.

A copy of Arcadis' Study Limitations is presented in Appendix A.

1.6 Reliance

It is understood that the current report has been prepared for the use of South Tees Development Corporation in their planning process. The contents of this report may not be used or relied upon by any person other than this party without the express written consent and authorisation of Arcadis.

2 Summary of Previous Environmental Work

2.1 Previous Environmental Works

Previous reports issued by Arcadis in relation to the site:

- Arcadis, 2021a. Environmental Site Assessment, March 2021, Ref: 10035117-AUK-XX-XX-RP-ZZ-0192-01-SBA ESA Review
- Arcadis, 2021b. Phase II Environmental Site Assessment (Draft), July 2021, Ref: 10035117-AUK-XX-XX-RP-ZZ-0317-01-SBB_ESA
- Arcadis, 2021c. Phase II Environmental Site Assessment (Draft), July 2021,10035117-AUK-XX-XX-RP-ZZ-0318-01-SBC ESA
- Arcadis, 2021d. Detailed Quantitative Risk Assessment, May 2021, Ref: 10035117-AUK-XX-XX-RP-ZZ-0270-01-SBA DQRA

Arcadis was provided with the following third-party reports:

- Royal Haskoning, 2021. South Bank Quay Ground Investigation and Generic Quantitative Risk Assessment Report, dated 16th April 2021, Report Ref: PC1084-RHD-ZZ-XX-RP-Z-0001
- CH2M, 2017. TS4 South Bank Phase 1 Geo-Environmental Desk Study, prepared by CH2M Hill for the Homes and Communities Agency, report ref. 678079_TS4_002 dated August 2017 and marked Final
- Wood, 2019. Former Steelworks Land, South Tees Outline Remedial Strategy, Prepared for South Tees Development Corporation by Wood, ref 41825-wood-XX-XX-RP-OC-0001_S0_P01 dated 25th June 2019
- Enviros, 2004. Soil and Groundwater Baseline Characterisation Study, Teesside Works, prepared by Enviros for Corus UK Ltd, Comprising:
 - Volume 1 Factual Report, Ref. Rlp250604corusteessidefactual.Doc dated 25th June 2004 and marked Final;
 - Volume 2 Interpretive Report Ref. Mwicorusdraftinterpretivemmdv#2.Doc dated 25th June 2004 and marked Final; and,
 - Volume 3 Summary Report dated June 2004.
- AEG, 1999. South Tees Industrial Area Site C Ground Investigation, prepared by Allied Exploration and Geotechnics Ltd. for English Partnerships, ref 1715H dated 12th July 1999 and marked Draft.

The site is also considered in:

 Arcadis, 2020. South Industrial Zone ES - Vol 2 - Chapter H (Ground Conditions and Remediation), prepared by Arcadis for STDC and dated July 2020.

As listed above, in addition to the recent 2020/2021 investigations by Arcadis and Royal Haskoning, investigations were also completed in 2004 and 1999 by Enviros and AEG respectively. Given the age of these investigations, and the spatial coverage of the recent 2021 investigations, the findings of the 2004 and 1999 investigations have not been discussed in detail below.

2.2 Summary of 2020/2021 Ground Investigations Scope

The three ESA reports for SBA, SBB and SBC prepared by Arcadis (Arcadis, 2021a, 2021b & 2021c) encompass the majority of the site footprint. The ESA report for SBA includes an additional trial pit

investigation in the SBCO area. The Ground Investigation and GQRA Report prepared by Royal Haskoning (Royal Haskoning, 2021) encompassed the quayside area in the north of the SBA and SBB areas of the site.

Arcadis (2021a), completed in the SBA area, comprised the following scope:

- 49 trial pits to 4.5m below ground level (bgl);
- Soil logging and sampling from 14 additional trial pits in the SBCO area, to a target depth of 4.5m bgl
- Nine boreholes advanced by rota-sonic rig to depths between 10m 20m bgl, three of these were advanced 5m into the underlying bedrock;
- Soil logging and sampling;
- Installation of 15 groundwater monitoring wells (six dual installations);
- Groundwater monitoring and sampling (4no. rounds) as well as aquifer permeability testing and tidal monitoring from 10 wells installed;
- Groundwater monitoring and sampling (1no. round) of 13 quayside wells; and,
- · Permanent ground gas monitoring.

Arcadis (2021b), completed in the SBB area comprised the following scope:

- 46 trial pits, excavated to a target depth of 4.5m or refusal, or until natural material was encountered;
- Nine boreholes drilled by rota-sonic rig, with target depths of between 10m 20m bgl, or refusal on bedrock, three of these boreholes were advanced 5m into the underlying bedrock;
- Soil logging and sampling;
- Installation of 18 groundwater monitoring wells (including nine dual installations);
- Groundwater monitoring and sampling (3no. rounds) from 17 wells installed;
- Groundwater monitoring and sampling (1no. round) of 4 quayside wells; and,
- Permanent ground gas monitoring (1no. round).

Arcadis (2021c), completed in the SBC area comprised the following scope:

- 55 trial pits, excavated to a target depth of 4.5m or refusal, or until natural material was encountered;
- 16 boreholes drilled by rota-sonic rig, with target depths of between 10m 20m, or refusal on bedrock, three of these boreholes were advanced 5m into the underlying bedrock;
- Soil logging and sampling;
- Installation of 25 groundwater monitoring wells (including nine dual installations);
- Groundwater monitoring and sampling (3no. round) from 23 wells installed; and,
- Permanent ground gas monitoring (1no. round).

Royal Haskoning (2021), completed in the Quayside area, comprised the following scope:

- 25 boreholes advanced by rota-sonic rig to a maximum depth of 41m bgl;
- Soil logging and sampling;
- Installation of 17 groundwater monitoring wells; and,
- Groundwater and surface water monitoring and sampling (2no. rounds).

A monitoring well location plan for the above installations is presented as Figure 2 which includes all of the monitoring wells where groundwater sampling was undertaken. In total, 67 wells were monitored. These relate to a total of 52 locations as a number of the locations were dual installations.

2.3 Summary of Site History

The ESA reports outline the history of the site and its immediate surroundings, used as part of the CSM development. The below table summarises the history of the site based on the available information identified by Arcadis:

Date	Description
1856	The site was predominantly mud, sand and marshes associated with the Tees Estuary and below the high tide limit. A railway line is present to the south of the site.
1893	The site is still shown as estuarine mud with two jetties crossing to the river in the west. South Bank Iron Works and Phosphate Manure Works have been constructed on site in the SBC area.
1913 - 1938	The site appears to have been reclaimed from the Tees Estuary by the placement of materials from the steelmaking process. The Phosphate Manure Works is now a basic slag works. Various structures are shown on site in the SBA and SBC area including railways, cranes, a pumping station, brine wells / salt works, blast furnaces, galvanising works, and tanks later labelled as containing benzol. Two large reservoirs are shown between 1913 and 1927 in the SBA area along with Benzol tanks. A tarmacadam works is identified to the west of SBC.
1955	The SBA area primarily comprised of stocking areas with sidings and travelling cranes present. The benzol tanks are still shown. There has been development to the south of SBA with a concrete plant, and the basic slag works on SBC. SBC has undergone further development with the construction of two ore grading plants and a sinter plant along the southern site boundary. Sub-stations are noted as being located centrally and directly north of the basic slag plant. The South Bank Iron Works has expanded to the west of site. The tarmacadam works is no longer present.
1965	The South Bank Coke Ovens and Biproducts Plant (SBCO) has been built immediately to the south of SBA in its present-day format with tanks.
1969	An oil depot (current day HFO tanks) has been developed on SBB, along the northern boundary with the River Tees. More rail sidings to the south and west of SBB have been developed.
1970	Sidings are present down much of the west of SBA and centrally on SBC and the large building currently being demolished on SBA is labelled as a ferro-manganese crushing plant.
1990	Between the 1990s and present, a Hanson Concrete depot has been developed on a plot of land enclosed by SBB. SBB is predominantly used for stockpiling of material. During this time, buildings recede from SBC and the modern-day configuration reached. The interior of the site is disused and barren.

The industrial history of the site and its surroundings highlights the potential for contaminant sources to be present from the Made Ground material used to build up the land when it was reclaimed from the estuary, as well as from other specific sources relating to on-site and off-site industrial operations.

2.4 Summary of Ground Conditions

The below table summarises the ground conditions encountered during the 2020 and 2021 investigations reported in Arcadis, 2021a, 2021b & 2021c which encompasses the majority of the site footprint. Ground conditions remained generally consistent across the three main areas of the site. Ground conditions encountered in the quayside area, reported in Royal Haskoning, 2021, were found to be in line with the below:

Unit	Minimum Basal Depth (m	Maximum Basal Depth (m bgl)	Comment
		11.7	Site surfacing comprised either soft standing of gravel, sand, or slag with concrete and bituminous surfacing also present in SBB and SBC.
Made Ground	2.6		The Made Ground encountered during the investigation predominantly comprised granular material with a fine-grained component and medium to high cobble/boulder content which included slag, brick, concrete and occasionally clinker, coke, coal and/or metal. Rare to frequent refractory materials were identified in a number of trial pits across the site in SBA. Based on visual assessment slag was found to be the dominant component of Made Ground in 50 of 58 locations in SBA, all 55 locations in SBB and 50 of 55 trial pit locations in SBC. From the 14 additional trial pits in the SBCO area, slag was the dominant component at all 14 locations.
			In one location in SBA and six locations in SBC, a concrete slab was identified between 0 and 1.5m bgl.
			In 11 locations (predominantly in the south-western corner of SBB) a layer of granular made ground coloured green blue was identified.
			All trial pits were terminated within the Made Ground.
Tidal Flat Deposits (Secondary A Aquifer)	6.1	16.9	Encountered in 33 of 34 boreholes (except SBC_AUK_BH105). Generally comprised soft sandy silt (often shelly) frequently underlain by a silty sand. Identified to be widely distributed across the site below the Made Ground.
Glaciolacustrine Deposits	7.2	19.2	Glaciolacustrine Deposits were recorded below the Tidal Flat Deposits in seven boreholes from SBA and 15 boreholes from SBC. The deposit was noted to be less than 1m thick in SBA_AUK_BH103 and SBA_AUK_BH107.
(unproductive strata)			The deposits were generally described as a soft to firm brown laminated clay often with sand partings along laminations.
			In one location SBA_AUK_BH105 two units of Glaciolacustrine deposits were noted with Glacial Till in between.
Glacial Till (unproductive strata)	9.8	26.25	Glacial Till was identified in 31 of 34 boreholes below the Glaciolacustrine Deposits (if present) or Tidal Flat Deposits. Glacial Till was described as a firm to very stiff red brown slightly sandy slightly gravelly clay, with gravel composed of mixed lithologies, including sandstone, mudstone, and limestone. Glacial Till is distributed widely across the site overlying the bedrock.

Unit	Minimum Basal Depth (m bgl)	Maximum Basal Depth (m bgl)	Comment
			In one location SBA_AUK_BH105 two units of Glacial Till were present the upper layer interbedded between Glaciolacustrine deposits
Sand and Gravel (suspected to be a granular	19	22.4	Sand and Gravel was identified in two boreholes from SBA. Two bands of suspected granular lens were noted in SBA_AUK_BH105 below the lower band of Glaciolacustrine Deposits and below the Glacial Till Deposits, and in SBA_AUK_BH102 it was noted below the Glacial Till.
lens at the base of the Glacial Till)			The Sand and Gravel was described as a clayey Sand and Gravel with gravel composed of mixed lithologies, including sandstone, limestone, flint and chert.
Mercia	16.5	31.5	An extremely weak to weak red brown mudstone partially to highly weathered with numerous bands of white gypsum and locally green grey glauconite, recorded in 27 boreholes.
Mudstone			The Mercia Mudstone was noted to become interbedded mudstone, sandstone and siltstone at depth within some boreholes.

Two types of Made Ground were noted:

- Slag-dominant material (>50% slag): Generally ranging from gravel to cobble and occasional boulder size fragments. The slag material was generally vesicular and grey-green-white in colour. Slag dominant Made Ground was identified to comprise the primary Made Ground in 42 of the 49 trial pits from SBA, all 46 trial pits in SBB, 48 of the 53 trial pits in SBC and all 14 of the additional SBCO area trial pits.
- Granular Made Ground: Identified widely across the site of varying composition, most frequently a
 sandy gravel with varying cobble content. Gravel and cobbles include brick (including refractory),
 concrete, ash and clinker, slag was not the dominant constituent although often still present within the
 soil matrix.

2.5 Summary of Hydrogeological Conditions

The site overlies Tidal Flat Deposits and the Mercia Mudstone, both of which are designated as Secondary A and Secondary B aquifers, respectively. The remaining units identified are classified as unproductive strata.

The groundwater underlying the site was found to be consistently resting within the Made Ground, generally towards the base 1m (range of 0.4m - 2.0m) of the Made Ground (thickness encountered of 2.6 to 11.7m, mean 7.61m). This corresponds with a resting water level range of 1.69m - 10.34m bgl (mean 6.1m bgl). C Concentrations of contaminants in soil from the greater depths of the Made Ground and from the Tidal Flat Deposits beneath are therefore saturated.

The Tidal Flat Deposits are present continuously across the site but in locations are of limited thickness. Although classified as Unproductive Strata, the site data indicates the potential for horizontal and vertical migration of groundwater within more permeable horizons of the Glaciolacustrine Deposits and Glacial Till. The underlying bedrock is considered the most sensitive aquifer system at the site, with a groundwater flow direction towards the northeast inferred from site data.

Assessment of the groundwater level data indicates that the water level in wells screening the bedrock aquifer is above the slotted section, and water level is resting within the Made Ground. This indicates that the

groundwater is not confined and may be in hydraulic continuity with groundwater within the groundwater within the Made Ground and Tidal Flat Deposits.

Groundwater flow was inferred to be toward the north or north-east within both the Made Ground and Tidal Flat Deposits, towards the River as would be expected.

A tidal influence measured in some of the on-site wells, and the lack of a current sheet pile wall or physical barrier between the site and River Tees, indicates that the groundwater migration pathway to the River and Estuary is likely to be active. A maximum tidal influence range of 4cm was measured in Tidal Flat Deposits. Tidal influence in Made Ground was not measured to date but is anticipated to be greater.

2.6 Summary of Hydrology

The River Tees is present approximately 20m to the north of the site boundary. The River Tees is a tidal estuary, flowing towards the northeast. The Teesmouth and Cleveland Coast is also a designated Ramsar site, Site of Special Scientific Interest (SSSI) and a Special Protection Area (SPA).

2.7 GQRA Conclusions

2.7.1 Human Health

The conclusions of the GQRAs undertaken for SBA, SBB and SBC were that concentrations of arsenic, lead, benzene, dibenzofuran, 1,2 dichloroethane and PAHs were measured exceeding the Generic Assessment Criteria (GAC) in soil. Concentrations of contaminants were not measured above the GAC derived for the protection of human health in groundwater. Non aqueous phase liquid (NAPL) and tar were identified primarily within the Made Ground in three locations from SBA, one from SBB, four from SBC and two from the additional SBCO area investigation.

Asbestos was recorded in seven of the Made Ground samples from SBA, three from SBB and 11 from SBC. Asbestos poses a potential risk to human health via inhalation of loose fibres and has implications for remedial costs.

Permanent ground gas monitoring completed to date showed the risk from permanent ground gases to be very low.

The reports concluded that the potential risks to human health could be reassessed further when a redevelopment scenario and proposed site levels have been fully defined.

The Royal Haskoning April 2021 report highlighted elevated levels of arsenic exceeding human health GAC in soils from the boreholes drilled along the northern edge of the site as part of a ground investigation to inform the design of a sheet pile wall. Their report concluded that soils in those boreholes do not pose an unacceptable risk to future commercial users.

The findings of the GQRAs currently provide an appropriate level of assessment of the potential risk to human health based on what is known of the planned redevelopment scenario. The findings of the GQRA indicate the potential risk to human health can likely be managed by pathway management, such as simple cover systems, hardstanding, positioning of on-site buildings and suitable vapour membranes, or by target localised removal of soils. Further human health assessment has therefore not been undertaken at this stage.

2.7.2 Water Resources

Several exceedances of Water Quality Standards (WQS) by measured concentrations of contaminants in groundwater were recorded on site, primarily relating to those wells screening the Made Ground and the Tidal Flat Deposits. The GQRAs recommend further assessment in relation to controlled waters and ecological

receptors (River Tees and Teesmouth and Cleveland Coast SSSI) but noted the limited resource value of the underlying aquifers.

Dense Non-Aqueous Phase Liquid (DNAPL) was measured in SBA_AUK_BH110 in two of the three groundwater monitoring visits. This, along with other CoC, could not be fully delineated as part of the initial SBA ESA due to the presence of an exclusion zone on site relating to the instability of the ammonia scrubbers on the SBCO site to the south. This was highlighted as a potential data gap in the SBA DQRA. The 14 additional trial pits advanced in the SBCO area following the SBA DQRA provide further assessment of the soil quality in this previously investigated area.

The proximity of the site to the River Tees (approximately 20m north of the site boundary) has resulted in a tidal influence in some of the monitoring wells and this should also be considered.

The Royal Haskoning April 2021 report also shows detections of the same CoC highlighted within the Arcadis 2021a, 2021b & 2021c reports within the groundwater in the wells running along the northern site boundary. They also highlighted a potential for DNAPL to be present within BH2025, although this was not measured or sampled during the works but rather based on observations during drilling and contaminant concentrations within the soil and groundwater. The source of the impacts in BH2025 is not known as is speculated to perhaps be an off-site source.

2.8 South Bank A DQRA Summary

The SBA DQRA undertaken by Arcadis (Arcadis, 2021d) further assessed the potential risk to water resource receptors based on data from Arcadis (2021a).

A brief summary of the DQRA is provided below.

2.8.1 Sources

The DQRA assessed the risk to water resources based on two separate sources:

- Made Ground Source from across the site considered to comprise a single diffuse soil source associated with Made Ground and slag.
- **Groundwater Source** in the vicinity of SBA_AUK_BH110 considered to represent contamination associated with SBCO to the south.

2.8.2 Pathways

The environmental fate and transport pathways modelled within the DQRA were:

- **Groundwater Source:** Lateral migration of potentially impacted groundwater within Made Ground towards the identified water resource receptors and subsequent dilution with the receptor.
- Made Ground Source: Dilution with the receptor.

Additionally, vertical migration of impacts down relic foundation piles was also qualitatively assessed.

2.8.3 Receptors

The water resource receptors assessed in the DQRA were:

• The River Tees

The primary water resource receptor associated with the site was considered to be The River Tees, although a theoretical compliance point with the aquifer was also assessed in line with the EA guidance for hazardous substances (EA, 2017).

The underlying Tidal Flat Deposits and the Mercia Mudstone are designated as a Secondary A and Secondary B Aquifers, respectively. The remaining units identified are classified as unproductive strata. However, the DQRA considered that due to the aquifer characteristics, the industrial history of the site and its surroundings, as well as the brackish nature of the groundwater due to proximity to the estuary, groundwater abstraction for potable water is unlikely to be considered in the future. The resource potential for the underlying aquifers was therefore considered to be very low.

Furthermore, assessment of the contaminant distribution indicated that the majority of contamination was restricted to the Made Ground. Contamination in the underlying Tidal Flat Deposits and Mudstone were limited and localised, indicating that vertical migration into these units is limited. Given that the Made Ground represents reclaimed land, it is unlikely to be considered as a receptor under the aquifer classifications and would instead represent a pathway towards surface water.

2.8.4 Assessment Approach

Remedial Targets Worksheet (RTW) was used to derive Site Specific Assessment Criteria (SSAC) for groundwater using site-specific information, where available. Dilution with the River Tees was also calculated in line with the Remedial Targets Methodology (RTM) guidance.

The dilution assessment based on RTM guidance only allowed for a limited amount of dilution (actual dilution occurring likely much higher). 10% of compliance concentrations (saline environmental quality standards [EQS]) were taken in line with guidance to add further conservatism.

The assessment considered three separate compliance points, for which SSAC were derived:

- On-site 50m compliance point, protective of aquifers and surface water (assessed for the Groundwater Source only)
- Prior to the River Tees (at sentinel wells and 360m down gradient from the Groundwater Source); and
- Within the River Tees (dilution in the receptor; both Sources)

2.8.5 DQRA Findings

50m Compliance Point (Groundwater Source only)

The 50m compliance point was modelled for the groundwater source as a first stage of assessment in line with EA guidance for hazardous substances. This compliance point was located on site (down gradient boundary approximately 310m beyond). Aquifers underlying the site were considered of limited resource potential. Furthermore, the evidence from site data indicated that contamination was not migrating downwards significantly into the underlying aquifers and was generally limited to the overlying Made Ground (reclaimed land). As such, although a number of hydrocarbons and cyanide exceeded the 50m SSAC derived, measured concentrations were not considered to present a significant risk to water resources on this basis alone. Assessment of a more distant compliance point protective of the River Tees provided a more accurate appraisal of the risk to water resources.

<u>Compliance Point Prior to the River Tees (at Sentinel Wells and 360m down gradient from Groundwater Source)</u>

From the Groundwater Source, cyanide, naphthalene and benzene were the only CoC compounds to exceed the SSAC. Naphthalene and benzene exceeded by less than an order of magnitude. Given the conservatism in the assessment (as demonstrated in the model validation undertaken within the DQRA), and assumptions in modelling cyanide, the risk presented by these CoC within the groundwater source was considered to be low.

Measured concentrations of a number of CoC in groundwater in sentinel wells exceeded EQS including TPH, metals, inorganics and PAH. This was not unexpected given that some of the sentinel wells were installed

directly screening the Made Ground. As Made Ground forms the boundary with the River Tees, concentrations were considered likely to be similar immediately adjacent to the River. The presence of future structures such as sheet piled walls (potentially installed as part of redevelopment works) would go some way to limit the amount of groundwater discharge from the site into the River Tees.

Compliance Point within The River Tees (dilution in the receptor)

None of the measured concentrations of CoC in the on-site Groundwater Source wells or the sentinel wells (located along the hydraulically down gradient northern site boundary) exceeded their respective SSAC when dilution within the River Tees was considered.

Given the margin by which concentrations fell below the criteria, contaminant concentrations in the River Tees were considered unlikely to exceed measurable concentrations due to inputs from on-site sources.

Surface water monitoring data from the River Tees is provided in Royal Haskoning 2021. The findings of the surface water sampling are considered to support the above conclusions.

Other Considerations

It was understood the SBCO plant to the south was likely to be demolished with a ground investigation and remedial works to be undertaken at the site. It was concluded as likely that, once this has been carried out, contaminant concentrations beneath SBA would decrease, particularly within SBA_AUK_BH110 and the Groundwater Source area, from where the highest measured groundwater concentrations of CoC were sampled.

The modelling showed that sufficient time may not have yet elapsed for contaminants to have reached a steady state equilibrium with groundwater (in relation to the groundwater source). A timeframe assessment for the Groundwater Source predicted that measured concentrations may increase by around an order of magnitude from present day (assumed around the 50yr timeframe modelled) to steady state (approximately 190yrs or greater). Given this, and the current measured concentrations in the sentinel wells, it was concluded that measured sentinel well concentrations would still remain well below their SSAC (considering dilution in the River Tees) into the future.

NAPL has been recorded on site. It was concluded that this may require consideration as part of remediation works for the purposes of environmental betterment. However, dissolved phase concentrations indicated that NAPL was not presenting an unacceptable risk to water resources.

A potential pathway due to piled foundations was identified under the pollutant linkages. Based on the findings of the contaminant distribution and underlying ground conditions, it was considered unlikely that this pathway could represent a significant risk to water resources. Although contamination may locally be able to enter the underlying natural deposits around piles, lateral migration within the unit was concluded unlikely to be significant.

3 Potentially Active Pollutant Linkages

Potential sources of contamination exist on site associated with the Made Ground and historical use of the site.

The potentially active pollutant linkages are discussed below, based on the findings of the ESA reports and GQRAs undertaken, and following the SBA DQRA.

3.1 Human Health

Based on the intended industrial / commercial end use of the site, future on-site commercial workers and construction workers are considered as the primary human health receptor. A human health GQRA has been undertaken and is considered to provide an appropriate level of assessment based on what is known of the planned redevelopment scenario. Therefore, human health will not be assessed further within the DQRA, as discussed in Section 2 above. It is recommended that risks to human health are considered at the design stage of any proposed redevelopment with regards to dermal, ingestion and inhalation pathways.

To summarise, the following pollutant linkages are considered potentially active in relation to human health receptors:

- Inhalation or ingestion of dust comprising contaminated soils, including asbestos fibres, in indoor or outdoor air.
- Dermal contact with contaminated soils.
- Inhalation of vapours in indoor or outdoor air arising from contaminated soils.

3.2 Water Resources

The site overlies Tidal Flat Deposits and the Mercia Mudstone, both of which are designated as Secondary A and Secondary B aquifers, respectively. The remaining units identified are classified as unproductive strata. The pathway of leaching of CoC from impacted soils and migration into groundwater is potentially active due to the absence of hardstanding on the site and active process of infiltration from rainwater. Groundwater is resting with the Made Ground beneath the site, which is of a higher permeability that the underlying natural deposits.

The River Tees is present approximately 20m to the north of the site boundary and groundwater migration pathway to the River and Estuary is likely to be an active pathway.

As concluded in the SBA DQRA (Arcadis, 2021d), due to the limited resource value of the underlying aquifers based on the industrial site setting, low permeability of the Tidal Flat Deposits & the Mercia Mudstone and the brackish nature of the water, it is considered unlikely that groundwater would be abstracted for drinking purposes. As such, the use of saline environmental quality standards (EQS) as opposed to drinking water standards (DWS) are considered most appropriate for assessing the risk to water resources, based on protection of estuarine surface water (River Tees) as of primary concern.

A NAPL source within the groundwater has been recorded in SBA_AUK_BH110 towards the southern boundary of the site. While the NAPL has not been encountered in surrounding wells, a dissolved phase plume located north towards the River Tees from the SBA_AUK_BH110 area is present. The NAPL was found resting on the boundary between the Slag Made Ground and the Tidal Flat deposits.

The groundwater source identified in the vicinity of SBA_AUK_BH110 is considered to form a potentially active pollutant linkage with the River Tees via the lateral migration pathway (mainly thorough the saturated Made Ground). This pathway was assessed as part of the SBA DQRA (Arcadis, 2021d) and found not to

represent a significant risk to water resources based on measured groundwater concentrations. As such, the significance of this pathway will be reviewed based on the additional data available and only assessed if a change to the CSM is required.

To summarise, the following pathways are considered potentially active in relation to water resource receptors:

- Leaching of CoC from soil into groundwater.
- Migration in groundwater through the Made Ground towards the surface water receptor (River Tees).
- Vertical migration of impacts down relic foundation piles is also considered potentially active.

4 Site Characterisation

4.1 Environmental Setting

The environmental setting of the site is summarised on Figures 1 and 4. Figure 1 identifies potentially sensitive land uses in the vicinity of the site, alongside identified environmental receptors located hydraulically down-gradient. Figure 4 includes a simplified profile of the geological conditions, alongside a conceptual cross-section identifying potentially active pollutant linkages.

4.2 Sources

4.2.1 On-Site Sources

Arcadis 2021a, 2021b and 2021c identified the following as potential on-site sources of contamination:

- Made Ground including slag
- South Bank Coke Ovens (SBCO)
- Benzol plant
- Iron / Galvanizing works
- Ferro-manganese plant
- Stocking area, railways and sidings
- Above ground storage tanks (various, including Heavy Fuel Oil [HFO] tanks) and HFO line
- Transformers and substations
- Infilled reservoir and pond
- Basic Slag Works
- Phosphate works

Made Ground

The entirety of SB is reclaimed land from the River Tees Estuary. The Made Ground used for the land reclamation is primarily composed of by-products from surrounding industrial processes, including slag. The Made Ground has therefore been considered as a single diffuse source of CoC across the entire site.

Contaminants primarily associated with Made Ground are found dispersed throughout the site in varying concentrations. Diffuse contaminants found throughout the site associated with Made Ground include metals, hydrocarbons including PAH, inorganics including cyanide, ammonia and sulphate, asbestos and limited amounts of other organic compounds such as phenolics.

SBCO

The SBCO to the south of SBA was considered in the SBA DQRA (Arcadis, 2021d) to be the likely source of the highest concentrations of CoC in groundwater and NAPL measured in SBA. The SBCO is shown on historical maps to have been built around 1965 and is known to have impacted underlying soil and groundwater from the facility operation and associated tanks and infrastructure.

Associated contaminants with the potential to affect groundwater quality include metals, hydrocarbons (including tars), PAH, inorganics including cyanide, ammonia and sulphate and other volatile and semi-volatile organic compounds.

Other Potential On-Site Sources

The other potential sources, identified in addition to Made Ground and SBCO, represent more localised potential sources of historical contamination. The Benzol plant and Ferro-manganese plant were located in the

eastern portion of the site. The coal stocking area was located in the southwest of the SBA and Iron / Galvanising works in the northwest of the SBA. A number of substations were identified across the site. Various tanks were located across the site, including the decommissioned HFO tanks in the north of SBB and decommissioned HFO line runs in the north of the site. Two large reservoirs were present historically on site which were infilled. The Basic Slag and Phosphate works were located in SBC in the south of the site.

Contaminants associated with the above include metals, asbestos, hydrocarbons (including tars), PAH, inorganics including cyanide, ammonia and sulphate, polychlorinated biphenyls (PCB), asbestos and other volatile and semi-volatile organic compounds.

4.2.2 Off-Site Sources

Arcadis 2021a, 2021b and 2021c identified The High Tip and Highfield Environmental as the main off-site potential source. The High Tip is located immediately to the east of the site. Associated contaminants with the potential to affect groundwater quality include metals, hydrocarbons, PAH, inorganics including cyanide, ammonia and sulphate and other volatile and semi-volatile organic compounds.

Given the north/north-easterly groundwater flow direction, the wharf and pumphouse identified to the north of the site are unlikely to affect groundwater quality beneath the site.

Other off-site sources identified include the Tarmac leasehold, located within the SBB footprint. Associated contaminants with the potential to affect groundwater quality include metals, TPH, PAH, VOC and SVOC.

4.2.3 Contaminant Distribution

Based on the results of the recent site investigations reported in by Arcadis (Arcadis, 2021a, 2021b & 2021c) and Royal Haskoning (2021), the contaminant distribution is summarised below for key CoC. Contaminant distribution plots are also provided for key CoC, including those CoC groups exceeding EQS in sentinel groundwater wells as Figures 3a-3af.

The seventeen Royal Haskoning wells along the northern boundary of the site have been referred to as sentinel wells as they are positioned to indicate contaminant flow off-site towards the River Tees. These sentinel wells generally screen the upper portion of the Tidal Flat Deposits, comprising sand, or screen the Made Ground.

The groundwater underlying the site was generally found to be resting within the Made Ground, with the Made Ground encountered a thickness of 2.6 to 11.7m, mean 7.61m). The resting water level ranged from approximately 1.69m – 10.34m bgl (mean 6.1m bgl), with the saturated thickness of Made Ground ranging from approximately 0.4m to 2.0m. Soil impacts from the greater depths of the Made Ground and from the Tidal Flat Deposits beneath are therefore saturated.

Saturated soil and leachate samples are considered useful for assessing where contaminant mass is stored, but potential risks to water resources are considered best represented by concentrations of CoC in groundwater. As such, saturated soil and leachate samples have not been included in the discussion below. For the purpose of assessment, unsaturated soils have been defined as those above 6m bgl based on the site data

Investigations were also completed in 2004 and 1999 by Enviros and AEG respectively. Given the age of these investigations, and the coverage of the recent 2021 investigations, findings of the 2004 and 1999 investigations have not been discussed in detail below. However, where pertinent information was identified, this has been referenced.

4.2.3.1 Non-Aqueous Phase Liquid (NAPL)

Non-Aqueous Phase Liquid (NAPL) was identified resting at the base of the Made Ground on the Tidal Flats deposits in SBA_AUK_BH110 at the southern boundary of the site. The NAPL thickness was measured on two occasions in October 2020 resting between 7.44 and 7.50m bgl (6cm thickness), and 7.16m and 7.50m bgl (34cm thickness).

NAPL was not identified by Royal Haskoning (2021). Hydrocarbon odours were noted in BH2025 and BH2021 (in the northwest and northeast of the site respectively) which the Royal Haskoning report states may be due to the presence of NAPL.

Investigations undertaken by Enviros (Enviros, 2004) also identified NAPL in two locations in the south of the site, approximately 30m from the SBCO boundary.

Observations of NAPL and tar were made primarily during intrusive investigation from within the Made Ground. These included three locations from SBA, one from SBB, four from SBC and two from the additional SBCO area investigation. However, SBA_AUK_BH110 in SBA was the only well from which a measurable thickness of NAPL was recorded during monitoring.

Within SBA (excluding SBCO area), observations of NAPL included viscous tar at 0.1-1.3m bgl in SBA_AUK_TP154, located in the north of the site in the vicinity of the HFO tanks. Further observations in SBA include SBA_AUK_BH105 and SBA_AUK_BH110 in the south of SBA where odours, sheen and tar were noted in saturated soils.

Within SBB, viscous tar was noted in unsaturated soils from SBB_AUK_TP114, located in the north of the site in the vicinity of the HFO tanks. The four observations of NAPL from SBC were at locations from across the site and within saturated soils where sheen, and odour were noted at base of the Made Ground. Within the SBCO area, tar and oil were observed in unsaturated Made Ground within SB_AUK_TP103 at 0.9m and SBA_AUK_TP116 at 1.8 to 4.0m.

4.2.3.2 Soil

Metals and Inorganics

Metals and inorganic species such as cyanide and ammoniacal nitrogen are found throughout the site (ammoniacal nitrogen only tested for in sentinel wells, in which it was measured above method detection limit [MDL] in all locations). As discussed above, this is likely due to the imported Made Ground and slag from which the site is formed. There are some locations which show higher concentrations than others, however no discernible correlation with on-site sources has been identified.

The highest total cyanide concentration was measured in SBA_AUK_TP113 at 3m bgl, located in the west of SBA (775mg/kg total cyanide, 7.69mg/kg free cyanide) The highest free cyanide concentration was measured further south in the SBCO area (9.7mg/kg from SBA_AUK_TP112 at 0.1m bgl).

The highest metal concentrations were measured at locations from across the site. The highest zinc concentration was measured in SBA_AUK_TP136 at 0.9m bgl in the east of SBA (28,000mg/kg zinc). The highest lead concentration was measured in SBC_AUK_TP168 at 2.1m bgl (3,900mg/kg) from the SBCO area in the south. The highest copper concentration (5,400mg/kg) was measured in SBC_AUK_TP111 at 0.8m bgl, located in SBC. The highest nickel concentration was measured in SBB_AUK_TP124 at 0.2m bgl, located in the north of SBB (400mg/kg).

As such, the presence of metals and inorganics is considered to predominately be a diffuse source associated with Made Ground.

Organic Compounds

Similarly to metals, PAH and TPH are found throughout the site and are also likely to be associated with the imported Made Ground and slag from which the site is formed. Again, no discernible correlation with on-site sources has been identified across the majority of the site. The highest concentrations were measured in SBA_AUK_TP154, located in the northeast of SBA, with a maximum sum TPH of 7,970mg/kg at 0.6m bgl and maximum benzene of 23.2mg/kg. The next highest sum TPH was from SB_AUK_TP103, located in the SBCO area, with a maximum of 4,300mg/kg at 0.7m bgl. Further lower TPH concentrations were distributed across the site, with the majority of samples had TPH concentrations of less than 100mg/kg and 165 out of 193 unsaturated soils sample (187 samples out of 222 total soil samples analysed from sum TPH) reported at less than MDL.

Higher sum TPH concentrations were measured in SBA_AUK_BH110, but these were saturated so are best represented by groundwater and discussed in Section 4.2.3.3.

For PAH, the highest sum PAH concentration was measured in SBA_AUK_TP154 at 0.6m (99,000mg/kg), coinciding with the highest sum TPH concentrations in the northeast of SBA. The next highest sum PAH concentrations were measured in the SBCO area in the south of the site (15,000mg/kg in SBA_AUK_TP116 at 3.2m bgl followed by 3,400mg/kg from SB_AUK_TP103 at 0.7m bgl). The highest naphthalene and benzo(a)pyrene concentrations were also measured in SBA_AUK_TP154 at 0.6m bgl (51,000mg/kg and 2,700mg/kg respectively). Similarly to TPH, further lower sum PAH concentrations were located across the site, with the majority less than 10mg/kg and 67 out of 222 unsaturated soil samples measured at less than the MDL.

It is noted that phenolic compounds (maximum phenol 400mg/kg) were also measured at relatively high concentrations in SBA_AUK_TP154 at 0.6m bgl, when compared with other samples from the site (majority of site phenol was less than MDL).

As such, the presence of PAH and TPH in soil is considered to predominately be a diffuse source associated with Made Ground, although some potential localised areas of higher concentrations may be present.

A limited number of additional, non-hydrocarbon, organic compounds comprising VOCs were measured in unsaturated soils at isolated locations. A maximum measured concentration of 0.43mg/kg was measured of 1,2-dichloroethane (measured in a single location, SBA AUK TP154).

4.2.3.3 Groundwater

TPH

Sum TPH (C5-C35) was measured above the laboratory method detection limit (MDL) in 45 of the 52 groundwater monitoring well locations (98 out of 203 samples) reported in Arcadis, 2021a, 2021b, 2021c and Royal Haskoning 2021.

The highest concentration of sum TPH was measured in SBA_AUK_BH110, located in the south of SBA and screening the Made Ground, and ranged between 3,900 μ g/l – 76,000 μ g/l across the four monitoring rounds in SBA (three rounds across the rest of SB). The locations with next highest measured concentrations were all also located in the south of the site, either in the vicinity of the SBCO area or hydraulically down gradient of it. These include SBC_AUK_BH107 (9,200 μ g/l), SBC_AUK_BH106 (8,200 μ g/l) and SBA_AUK_BH105 (2,900 μ g/l), all screening the Made Ground. TPH was measured primarily in wells screening Made Ground hydraulically downgradient of these locations, although it was also measured in the upper Tidal Flat Deposits and occasionally in the Mercia Mudstone.

The occurrence of the majority of the measured TPH groundwater concentrations in wells screening the Made Ground indicates that this is the main pathway for lateral migration of dissolved phase contaminants.

Sum TPH was measured above the MDL 24 out of 25 wells screening the Tidal Flat Deposits (42 out of 79 samples). A maximum measured concentrations of $2,886\mu g/l$ was measured in the Tidal Flat Deposits in BH2025 (sentinel well). In BH2025, concentrations could perhaps be linked to concentrations observed in SBA_AUK_BH107 (less than MDL - $1000\mu g/l$), or off-site sources as it is located along the western boundary of the site. SBA_AUK_BH107 screens the top of the Tidal Flat Deposits. It should be noted that the Tidal Flat Deposits in the locations with the highest concentrations have a granular component underlying the Made Ground, and therefore, contamination from Made Ground could mix vertically into the top of the more granular Tidal Flat Deposits, although it is considered likely to attenuate significantly vertically given the cohesive nature of the majority of this unit.

Concentrations above the MDL were measured in 10 out of 12 locations (18 out of 39 samples) screening the bedrock aquifer (Mercia Mudstone). Measured concentrations above the MDL ranged from 11 μ g/l in SBA AUK BH107 in the north of SBA to 2700ug/l in SBA AUK BH104D in the east of SBA.

BTEX Compounds

Benzene was measured above the MDL in 13 of the 52 monitored groundwater well locations analysed for BTEX. The highest concentrations were measure in SBA_AUK_BH110, located in the south of SBA, and ranged between 24,000μg/l and 47,000μg/l across the four visits in SBA. The next highest benzene concentration of 2,100μg/l was measured in SBC_AUK_BH107, to the south of SBA_AUK_BH110 and in the vicinity of the SBCO area and screening the Mudstone.

Within the sentinel wells, benzene was only measured in two locations BH2015 at $1\mu g/l$ and in BH2025 at a maximum of $130\mu g/l$.

Toluene, xylenes and ethylbenzene were measured above the MDL in 10 and 12 and 7 of the 52 monitored well locations respectively. Highest concentrations were again measured in SBA_AUK_BH110, with toluene ranging between $2,600\mu g/l - 4,500\mu g/l$, sum xylenes measured at $468\mu g/l - 920\mu g/l$ and ethylbenzene measured at $37\mu g/l$ to $42\mu g/l$ across the four visits.

PAH

Total PAH was measured above the laboratory MDL in all 52 monitored locations. Again, the highest concentrations were measured in SBA_AUK_BH110, with sum PAH ranging from 6,000ug/l to 11,000ug/l across the four visits, mainly comprising naphthalene.

The sentinel wells which measured the highest total PAH concentrations were BH2010 (maximum $220\mu g/I$) and BH2025 (maximum $800\mu g/I$), with naphthalene also the primary component.

VOC

The highest concentrations of VOCs (excluding hydrocarbon compounds) measured above the MDL include chloroform and 1,2-dichloroethane. Chloroform was measured in nine locations at a maximum of $30\mu g/l$ (SBC_AUK_BH109). Concentrations of 1,2-dichloroethane were detected in six locations at a maximum of 85ug/l (SBA_AUK_BH104).

Within the sentinel wells, there was one location with a measured concentration of 1,2-dichloroethane and this was in BH2025 (4ug/l), and no detections of chloroform. Low level detections of other VOC were measured in the sentinel wells (maximum of 1,2-dichloropropane at $12\mu g/l$).

Metals

Metals were measured above the laboratory MDL in all 52 groundwater monitoring well locations sampled to date. The highest concentrations of different metals were not measured consistently in any one well. The range in the majority of metal concentrations measured was generally around two orders of magnitude (maximum to minimum concentrations reported), indicating limited variability across the site.

Similarly to soils, there are some locations which show higher concentrations than others, however no discernible correlation with on-site sources has been identified. Boron is the only metal analysed where a potential spatial bias has been identified. The four highest concentrations were all measured around the north and centre of SBC (maximum 57,000µg/l in SBC AUK 115).

Cyanide

Total cyanide was measured above the laboratory MDL in 41 of the 52 monitored well locations. It should be noted that the MDL for the analysis was higher ($40\mu g/l$) in some locations, but that an MDL of $0.1\mu g/l$ was used in the sentinel wells. This means that lower total cyanide concentrations may be more widespread that indicated by the current dataset.

The maximum total cyanide concentration was measured in SBB_AUK_BH106 of $3,800\mu g/I$ ($280\mu g/I$ to $3,800\mu g/I$ across the three monitoring visits) from the centre of SBB and screening the upper Tidal Flat Deposits. The next highest total cyanide concentrations were measured in the SBCO area, with a maximum of $1,400\mu g/I$ measured in SBC_AUK_BH107 and a maximum of $690\mu g/I$ measured in SBA_AUK_BH110. This indicates that the highest measured total cyanide concentrations appear to be associated with both an area of SBB and the area around SBCO, whilst lower more widespread concentrations of total cyanide are potentially present due to the Made Ground.

Free cyanide follows a similar distribution, albeit at lower concentrations and in fewer locations. Free cyanide was measured about the MDL in 19 out of 52 locations, with a maximum of 420µg/l measured in SBB_AUK_BH106. It should be noted again that the MDL for the analysis was higher (20ug/l) in some locations, but that an MDL of 0.1µg/l was used in the sentinel wells.

Thiocyanate was measured above the laboratory MDL in 40 of the 52 monitored well locations. Maximum concentrations were measured in SBB in monitoring well location SBB_AUK_BH106, the same location as the highest free and total cyanide concentrations. Measured thiocyanate concentrations in SBB_AUK_BH106 ranged from 490,000µg/l to 1,700,000µg/l from the three monitoring visits. The next highest thiocyanate concentration was also within SBB (SBB_AUK_BH105 at 270,000µg/l maximum) with other relatively high concentrations also in a similar area. Across the rest of SB, including SBA and SBB, lower thiocyanate concentrations were more widespread, with 29 out of 37 monitoring well locations from SBA and SBB measuring less than MDL in at least one of the monitoring rounds.

Ammoniacal Nitrogen

Ammoniacal nitrogen was measured above the MDL in all 52 groundwater monitoring wells sampled to date. Measured concentrations ranged from 0.016mg/l to 360mg/l. The highest three ammoniacal nitrogen concentrations were all located in the vicinity of SBCO (maximum of 360mg/l measured in SBC AUK BH107).

The next highest concentrations were mainly located hydraulically down gradient of the maximum concentrations identified above, within the Made Ground or upper Tidal Flat Deposits. This suggests a groundwater plume originating from a localised source. Further higher concentrations were measured in the north of SBB, in the area of the HFO tanks (maximum 150mg/l in this area in BH-2006).

Although lower ammoniacal nitrogen concentrations are widespread across the site, the higher concentrations measured may correlate with historical site usage, indicating potential localised sources.

4.2.3.4 Surface Water

Surface water samples from the River Tees were obtained and reported in Royal Haskoning 2021. Samples were taken from locations during two rounds of monitoring.

Measured concentrations of TPH, phenolics VOC and SVOC were below the laboratory MDL. Concentrations of metals and inorganics were measured above the MDL, along with a number of PAH compounds. Measured concentrations were similar for the majority of CoC from all three sampling locations, suggesting no trends related to groundwater discharges from the site.

4.2.4 Summary of Contaminant Distribution Findings

In unsaturated soil, in most cases, no significant spatial distribution trends have been identified, suggesting Made Ground is of a similar composition across the site and should be considered as a single source. As such, contaminants measured in Made Ground are not generally due to primary contaminant sources associated with infrastructure and historical industrial processes on-site.

The highest hydrocarbon concentrations in soil were measured from around the SBCO area, including the highest measured concentration in downgradient monitoring well SBC_AUK_BH110. However, the highest concentrations in soils in this area were saturated, suggesting that they relate to a groundwater source rather than the Made Ground.

In groundwater, a more distinct plume is evident in the vicinity of the SBCO area and southern SBA boundary, in the same area as the highest saturated soil impacts. The highest groundwater contaminant concentrations were measured in SBA_AUK_BH110 adjacent to the southern boundary of SBA, which separates SBA from the SBCO facility (predominantly hydrocarbons and phenolics, and also cyanide). Relatively high hydrocarbon concentrations, particularly benzene, were measured in nearby locations around the SBCO area. SBA_AUK_BH110 also had a measured thickness of DNAPL on two of the three groundwater monitoring visits undertaken in October and November 2020 resting at the base of the Slag Made Ground above the Tidal Flat Deposits.

Given that the Made Ground source material is in part saturated, the ground is uncovered, the permeable nature of the Made Ground, and the significant length of time the Made Ground has been present, partitioning into groundwater is likely to have occurred already. Based on this, groundwater is considered to provide the best representation of the potential risk to water resource receptors.

The seventeen sentinel wells along the northern boundary of the site generally screen the upper portion of the Tidal Flat Deposits, comprising sand, or screen the Made Ground. Based on the review of contaminant distribution and depth profile, they provide an indication of contaminant flow off-site towards the River Tees. Measured concentrations within the sentinel monitoring wells, and the contaminants present, are in line with those from across the remainder of the site. This is with the exception of groundwater in the area of SBA_AUK_BH110 associated with the Groundwater Source, where contaminants (including hydrocarbons, PAH, phenolics, and also cyanide) are of higher concentration.

4.2.5 Modelled Source Area (including

Based on the above assessment of contaminant distribution, the conceptual understanding of site sources remains the same as the SBA DQRA; that the site can be conceptualised as comprising two sources to assess:

- Made Ground Source from across the site considered to comprise a single diffuse soil source associated with Made Ground and slag.
- Groundwater Source in the vicinity of SBA_AUK_BH110 considered to represent impacts associated with the SBCO area.

The Groundwater Source was modelled in the SBA DQRA (Arcadis, 2021d), which concluded that measured concentrations of CoC from the modelled Groundwater Source do not represent a significant risk to the primary water resource receptor (River Tees). As no changes have been made to the conceptual understanding of this area, and no additional groundwater monitoring has been undertaken, the findings of the

SBA DQRA are considered to remain valid. As such, only the Made Ground source has been assessed in this DQRA.

Made Ground is present across the site, including in the sentinel boreholes, and it is likely present immediately adjacent to the River Tees (albeit that a future sheet pile wall may be present in future, potentially reducing the flow of groundwater). The Made Ground source has therefore been conceptualised as the entirety of the site, immediately bordering the River Tees.

The modelled source length has selected in order to account for background contributions from the wider Teesworks site. This is on the understanding that Made Ground is likely present across a significant portion of the wide Teesworks site, particularly in areas bordering the River Tees where land reclamation will have occurred

The modelled source length selected of 5km may allow the criteria developed in this assessment to be used to assess other areas of the Teesworks site where Made Ground is a single source. However, first a detailed conceptual review of any areas assessed in future needs to be undertaken. In particular, confirming sources, pathways and receptors remain applicable.

4.2.6 Selected Compounds for Modelling

The assessment has been undertaken based on contaminants measured above the laboratory MDL from 47 wells sampled to date from across the site. These are broadly in line with the CoC measured in the sentinel wells alone. Table 1 presents the CoC measured above the MDL and provides a screening exercise including a review of prevalence and availability of EQS to select CoC to model.

4.3 Water Resource Receptors

The primary water resource receptor associated with the site is considered to be The River Tees.

Surface water features present are the River Tees and the Teesmouth and Cleveland Estuary. Both are considered to be receptors, with the Teesmouth and Cleveland also being a designated Ramsar site, SPA and a SSSI.

Groundwater within the Tidal Flat Deposits and the Mercia Mudstone are designated as a Secondary A and Secondary B Aquifers, respectively. The remaining units identified are classified as unproductive strata. Groundwater was not assessed as a receptor at significant risk based the industrial history of the site and its surroundings, the brackish nature of the groundwater due to proximity to the estuary and the low potential for groundwater abstraction for potable water in the future. The resource potential for the underlying aquifers is therefore considered to be very low. Furthermore, assessment of the contaminant distribution indicates that the majority of contamination is restricted to the Made Ground and upper granular regions of the Tidal Flat Deposits. Contamination in the deeper underlying Tidal Flat Deposits and Mudstone are limited and localised, indicating that vertical migration into these units is limited.

4.4 Pathways

4.4.1 Modelled Pathways

To assess the potential risk presented to the identified receptors, the pathways defined as potentially active within the pollutant linkages need to be considered further. Site-specific information is used where possible to assign parameter values for:

the physical characterisation of the geological and hydrogeological setting of the site.

Based on the results of the environmental investigations completed at the site, the CSM is presented on Figure 4.

The permeability of the Made Ground is likely much higher than that for the underlying natural geology, based on the soil log descriptions from the site. Evidence from tidal loggers also showed limited variation for groundwater depth (maximum 4cm) within the natural deposits, including locations tested within the vicinity of the River Tees. The absence of significant tidal variation in combination with the absence of a physical barrier (such as a sheet pile wall) between the River Tees suggests that the potential for lateral migration within these units is likely also limited. As such, Made Ground has been modelled as the primary unit from which the discharge of contamination into the River Tees occurs.

As discussed above in Section 4.2, Made Ground is present across the site, including in the sentinel boreholes, and it is likely present immediately adjacent to the River Tees. Therefore, a lateral migration pathway along which contaminant attenuation may occur has not been modelled.

Furthermore, given the diffuse nature of contamination in the Made Ground, absence of significant spatial distribution trends, the relatively permeable nature of the Made Ground, absence of hardstanding and the significant length of time the Made Ground has been present, concentrations immediately adjacent to the River Tees (and therefore potentially entering the River Tees, as represented by the sentinel wells), are likely to be at steady state in relation to the Made Ground source.

A sensitivity analysis has been carried out in line with the methodology outlined in the Remedial Targets Methodology (RTM) Guidance (EA, 2006), to assist with selection of parameter values required for the key fate and transport pathways. The results of sensitivity testing are presented in Appendix B. Sensitivity testing was completed for benzene. A full listing of the physical parameter values, used in the risk assessment is presented in Appendix C.

4.4.2 Environmental Fate and Transport Pathways

The environmental fate and transport pathway modelled within the DQRA is:

• Dilution with the receptor.

5 Detailed Quantitative Risk Assessment

5.1 Selection of the Assessment Tools

The DQRA has been undertaken using site-specific information, where available, to derive risk-based assessment criteria, which can be used to assess whether the measured concentrations of CoC on site present potentially unacceptable risks to the identified receptors.

A dilution assessment has been undertaken in line with the RTM guidance.

5.2 Methodology

The water resources risk assessment has been undertaken to assess the risk to the River Tees following the risk assessment methodology outlined in Appendix D.

The assessment has been undertaken in two stages, with the second stage undertaken dependent on the outcome of Stage 1:

- Measured concentrations of contaminants in groundwater representing those with potential to enter the River Tees were directly compared with saline EQS.
- 2. Further to this, SSAC were calculated taking into account a dilution factor within the River Tees.

Measured concentrations of contaminants selected following contaminant screening (as discussed in Section 4.2.6) from the 67 groundwater monitoring wells sampled from 52 locations from across the site were compared to the assessment criteria as an initial assessment. Seventeen monitoring wells were installed along the northern boundary of the site, prior to the River Tees. These were described in the DQRA as "sentinel wells" and are considered to provide the best representation of groundwater potentially entering the River Tees due to their location at the northern of the site - in particular those screening Made Ground and upper granular portions of the Tidal Flat Deposits. As such, the groundwater quality data specifically from the sentinel wells were used to further discuss the potential risk presented to the receptor (River Tees), based on the findings of the initial assessment.

An assessment of contaminant travels times and time to steady state was undertaken in the SBA DQRA (Arcadis, 2021d) in relation to the Groundwater Source. This concluded that, whilst the timeframe assessment for the groundwater source indicated that steady state may not yet have been reached, any increase in concentrations at the sentinel wells was unlikely to cause the SSAC (considering dilution in the River Tees) to be exceeded.

In relation to the Made Ground Source, the SBA DQRA concluded: "Given the diffuse nature of contamination in the Made Ground from across the site, the relatively permeable nature of the Made Ground and the significant length of time the Made Ground has been present, concentrations in sentinel wells are considered unlikely to increase further over time and to be at steady state in relation to Made Ground."

Following the review of the sources, this conclusion is considered to remain valid and supports the use of the sentinel wells to further evaluate the risk to the River Tees from the site.

5.3 Model Run Parameter

The model run parameters are presented in the table overleaf:

Parameter	Value	Comment
Compliance Point	Two compliance points were assessed given that Made Ground is present up to the boundary of the site: Immediately prior to the River Tees (sentinel wells) Within the River Tees (dilution in the receptor)	In line with RTM methodology
Compliance Criteria	CoC Specific – saline EQS adopted where available	Table 1

5.4 Stage 1 – Comparison with EQS

Comparison with the saline EQS has been undertaken for measured concentrations from the 67 groundwater monitoring wells sampled. These findings were reported in detail in the GQRAs (Arcadis, 2021a, 2021b, 2021c and Royal Haskoning 2021), and have been presented in Table 3 of this report for completeness. To summarise; multiple CoC including metals and inorganics, hydrocarbons and organic compounds exceeded the EQS.

Further assessment of the potential risk to the River Tees has been undertaken by comparison of measured concentrations of CoC from the 17 sentinel wells only (as presented in Table 3), representing contaminants with potential to enter the river.

Multiple CoC from the 17 sentinel well also exceeded the EQS, including:

- Metals (lead, nickel and zinc from multiple locations, plus cadmium, copper and chromium from a single location)
- Inorganics (including ammoniacal nitrogen and cyanide)
- Hydrocarbons (including PAH, TPH and BTEX)

Based on the above, dilution in the receiving surface water body (River Tees) is considered further below (Stage 2).

5.5 Stage 2 - Assessment Incorporating Dilution in the River Tees

5.5.1 Calculation of Potential Dilution Effects

The potential dilution occurring within surface water is calculated by considering both the flow rate of groundwater into surface water and the flow rate of the surface water. Surface water rates have been based on data provided by the Centre for Hydrology and Ecology National River Flow Archive (www.nrfa.ceh.ac.uk), for the River Tees (recorded at Leven Bridge, reference: 25005 and at Low Moor, reference 25009) and are presented in the table below. The 95th percentile (minimum monthly flow) has been adopted to undertake the dilution calculation:

River Tees (Leven Bridge & Low Moor)	Flow rate (m³/s)	Flow Rate (m ^{3/} day)
Mean flow	22.389	1,934,410
Minimum monthly flow	3.329	287,626

The rate of groundwater flow into the river is estimated using the following algorithm, based on Darcy's Law:

$$Q_{gw} = k.i.A$$

Where:

 Q_{gw} = Groundwater rate of discharge into surface water (m³/day)

k = Hydraulic conductivity (m/day)

i = Hydraulic gradient

A = Area of impacted groundwater entering river (m²)

The values used for the above parameters are presented in Appendix C. In line with the methodology presented in the RTM, a sensitivity of parameters and justification of parameter ranges selected is discussed in Appendix B.

The dilution factor, DF, is calculated as:

$$DF_{River} = Qu + Qgw$$
 Qgw

DF_{River} = Dilution factor within the river

 Q_u = Surface water flow upstream of discharge point under low flow conditions (m³/day) – minimum flow rate

Q_{gw} = Groundwater rate of discharge into surface water (m³/day)

As such, using the input parameters in Appendix C, the dilution factor at the 95th percentile is calculated as:

 $DF_{River} = 2,997$

5.5.2 Development of Water Resource SSAC

SSAC defined for the protection of the identified water resource receptors have been derived in line with the RTM. 10% of the EQS was multiplied by the dilution factor.

The SSAC derived have been compared to the theoretical solubility. Where the SSAC exceeds the theoretical solubility, this is indicated by ">SOL" in the SSAC columns in the tables, and these CoC are not considered to pose unacceptable risks to the identified water resources receptors.

The SSAC derived are presented in Table 2.

5.5.3 Dilution Assessment Outcome

A comparison of the measured concentrations of the CoC with the SSAC is presented in Table 3.

The table overleaf presents a summary of the findings of the comparison. Maximum measured concentrations from the 47 monitoring wells samples from across site which exceeds the SSAC calculated with dilution are presented. Locations indicated in *grey italics* are located in the SBCO area. Measured concentrations are potentially associated with the Groundwater source modelled in the SBA DQRA. Where more than one round of monitoring has been undertaken, lower concentrations may have been recorded which do not exceed the SSAC.

Compound	SSAC (µg/l)	Number of Locations Exceeding SSAC	Maximum Measured Concentration (µg/l) & Location of Exceedances
Aliphatic >C6-C8	1,360	1	1,400 (SBA_AUK_BH104)
			8,900 (SBA_AUK_BH110)
Aromatic >EC10- EC12	1,360	3	4,200 (SBC_AUK_BH106)
			4,000 (SBC_AUK_BH107)
			1,600 (SBA_AUK_BH105)
Aromatic >EC12-	1 200	4	1,600 (SBA_AUK_BH110)
EC16	1,360	4	2,500 (SBC_AUK_BH106)
			2,100 (SBC_AUK_BH107)
Benzene	2,400	1	47,000 (SBA_AUK_BH110)
			880 (SBA_AUK_BH103)
N. 10.1	500		1900 (SBA_AUK_BH105)
Naphthalene	599	4	11,000 (SBA_AUK_BH110)
			6,000 (SBC_AUK_BH107)
			260 (SBA_AUK_BH110)
Fluoranthene	1.89	3	4.2 (SBB_AUK_BH104)
			2.8 (SBC_AUK_BH107)
Anthracene	30	1	52 (SBA_AUK_BH110)
			0.12 (BH-2013)
			0.1 (BH-2014)
			0.1 (SBA_AUK_BH103)
			0.06 (SBA_AUK_BH106)
			100 (SBA_AUK_BH110)
Benzo(a)pyrene	0.0509	12	2 (SBB_AUK_BH104)
Delizo(a)pyrene		12	0.08 (SBB_AUK_BH106)
			0.11 (SBB_XXX_BH204A)
			0.58 (SBC_AUK_BH101)
			0.43 (SBC_AUK_BH102)
			0.09 (SBC_AUK_BH106)
			0.11 (SBC_AUK_BH108)
Monohydric Phenols	2,310	1	16,000 (SBA_AUK_BH110)

Compound	SSAC (µg/l)	Number of Locations Exceeding SSAC	Maximum Measured Concentration (μg/l) & Location of Exceedances
Total Cyanide	300	6	300 (SBA_AUK_BH105) 350 (SBA_AUK_BH106) 690 (SBA_AUK_BH110) 3,800 (SBB_AUK_BH106) 1,400 (SBC_AUK_BH107) 420 (SBC_AUK_BH112)
Thiocyanate	2,700	15	5,500 (BH-2001) 17,000 (BH-2005) 60,000 (BH-2006) 22,000 (BH-2009) 100,000 (BH-2010) 62,000 (SBA_AUK_BH110) 77,000 (SBB_AUK_BH101) 33,000 (SBB_AUK_BH102) 86,000 (SBB_AUK_BH103) 140,000 (SBB_AUK_BH104) 270,000 (SBB_AUK_BH105) 1,700,000 (SBB_AUK_BH106) 36,000 (SBB_AUK_BH108) 9,500 (SBC_AUK_BH107) 4,400 (SBC_AUK_BH114)
Ammoniacal Nitrogen as N	6,290	24	8,500 (BH-2001) 8,000 (BH-2004) 150,000 (BH-2006) 14,000 (BH-2009) 28,000 (BH-2010) 25,000 (BH-2024) 11,000 (BH-2025) 220,000 (SBA_AUK_BH103) 250,000 (SBA_AUK_BH105) 14,000 (SBA_AUK_BH108) 31,000 (SBA_AUK_BH110) 12,000 (SBB_AUK_BH101)

Compound	SSAC (µg/l)	Number of Locations Exceeding SSAC	Maximum Measured Concentration (μg/l) & Location of Exceedances
			8,700 (SBB_AUK_BH102)
			88,000 (SBB_AUK_BH103)
			7,000 (SBB_AUK_BH104)
			18,000 (SBB_AUK_BH106)
			22,000 (SBB_AUK_BH108)
			7,500 (SBB_XXX_BH204A)
			8,100 (SBC_AUK_BH103)
			24,000 (SBC_AUK_BH106)
			360,000 (SBC_AUK_BH107)
			30,000 (SBC_AUK_BH113)
			210,000 (SBC_AUK_BH114)
			8,200 (SBC_AUK_BH115)
Hexavalent Chromium	180	1	280 (SBA_AUK_BH110)

Further assessment of the potential risk to the River Tees has been undertaken by comparison of measured concentrations from the 17 sentinel wells only, representing potential concentrations entering the river.

Only ammoniacal nitrogen, thiocyanate and benzo(a)pyrene in groundwater exceed the SSAC in the sentinel wells. Measured concentrations of ammoniacal nitrogen, thiocyanate and benzo(a)pyrene exceed the SSAC with dilution in seven, five and two out of the 17 locations monitored respectively.

5.5.4 Further Evaluation of Ammoniacal Nitrogen, Thiocyanate and Benzo(a)Pyrene

Further evaluation of the potential level of risk presented to the River Tees from measured concentrations of ammoniacal nitrogen, thiocyanate and benzo(a)pyrene has been undertaken below based on their presence in sentinel wells.

The following general considerations are taken into account in the further evaluation below:

- The SSAC derived in this report relate to a 5,000m source length to account for background contributions from the wider Teesworks site. This was based on the likely presence of diffuse contamination across the Teesworks site associated with Made Ground. Measured concentrations of contaminants associated with other historical land uses are more localised and the use of the 5,000m source length is therefore highly conservative in these instances. On its own, the SB site length parallel with the River Tees is approximately 1,350m. Where a source is localised, comparing to the SSAC appropriate for the wider Teesworks site may over-estimate the level of risk present.
- The dilution factors used in this report for the derivation of SSAC are based on upstream gauging stations on the River Tees and do not fully account for flow contributions for the lower Tees and estuary catchment. By comparison of the catchment area data provided by Centre for Hydrology and Ecology and the Environment Agency, it is estimated that the gauging stations used account for approximately 75% of the Tees catchment area. Therefore, the flow at the Teesworks site is underestimated, making the SSAC conservative.

- The dilution factors used in this report use low flow river conditions in line with RTM guidance. Mean flow rates, which are approximately 6.7 times higher than low flow conditions, may be more representative of likely conditions.
- The dilution effect only considers freshwater flow from the River Tees. Tidal flow within the river at the
 Teesworks site is also active as the river is estuarine at this point. An estimate of the tidal flow has not
 been made at this point. However, it is considered likely to make a significantly larger contribution to
 dilution for conditions other than low tide. The tidal range at Tees Docks (located approximately 700m
 from SB) is typically around 5m.

5.5.4.1 Ammoniacal Nitrogen

The assessment of contaminant distribution indicates that, whilst lower concentrations of ammoniacal nitrogen are widespread across the site, the highest concentrations are more localised and appear to be associated with historical land uses. These include the SBCO and the HFO tanks. Ammoniacal nitrogen groundwater distribution is presented on Figures 3ac and 3ad for Made Ground and natural geology respectively.

As discussed above, the dilution assessment undertaken considers a 5,000m source length to account for background contributions from the wider Teesworks site. The distribution of ammoniacal nitrogen concentrations exceeding the SSAC with dilution relates to approximately 800m parallel with the River Tees.

Adjusting the modelled source length to 800m to account for the localised ammoniacal distribution increases the dilution factor from 2,997 to 18,727. Using this dilution factor, an SSAC for a localised ammoniacal nitrogen source would be 39,000μg/l. A single sentinel well had measured ammoniacal nitrogen concentrations above this criterion on one occasion (150,000μg/l on 16th February 2021). Concentrations measured during the subsequent monitoring visit on 9th March 2021 were below the SSAC (20,000μg/l).

As an additional line of evidence, the compliance criteria for ammoniacal nitrogen has also been reviewed. Ammoniacal nitrogen species may exist as either the ammonium ion (NH_4^+) or the more toxic free ammonia (NH_3). Under all normal conditions the bulk of the ammonia encountered in estuaries will be as the ammonium ion. In marine waters, particularly at higher salinities, it has been shown that the ammonium ion can also permeate fish gills. The habitats standards for estuaries (WQTAG086, 2005) provides an annual average value of 1,100 μ g/l for total ammoniacal nitrogen which accounts for the presence of the ammonium ion. An SSAC calculated using this value as the compliance criteria would not be exceeded (SSAC of 3,300,000 μ g/l for a 5,000m source length or 20,600,700 μ g/l for an 800m source length).

Based on the above, and considering the conservatisms highlighted in Section 5.5.4, measured ammoniacal nitrogen concentrations are considered unlikely to present a significant risk to the identified water resource receptor (River Tees).

5.5.4.2 Thiocyanate

Similarly to ammoniacal nitrogen, assessment of the thiocyanate contaminant distribution indicates that, whilst lower concentrations of thiocyanate are widespread across the site, the highest concentrations are more localised in the SBB area and may be associated with historical land uses. Thiocyanate groundwater distribution is presented on Figures 3ae and 3af for Made Ground and natural geology respectively.

The distribution of thiocyanate concentrations exceeding the SSAC with dilution relates to approximately 500m parallel with the River Tees.

Adjusting the modelled source length to 500m to account for the localised thiocyanate distribution increases the dilution factor from 2,997 to 29,970. Using this dilution factor, an SSAC for a localised thiocyanate source would be 27,000µg/l. Two sentinel wells had measured thiocyanate concentrations above this criterion (BH-2006 at 60,000µg/l & BH-2010 at 100,000µg/l). To date, samples from these two wells have only been analysed once for thiocyanate. In other monitoring wells from SBB, a large variation in thiocyanate

concentrations has been measured (greatest variation in SBB_AUK_BH101 ranging from 140µg/l to 77,000µg/l). This indicates that a variation may also be expected in the sentinel wells.

In addition to the further considerations in 5.5.4 above, it is noted that a statutory UK EQS for thiocyanate does not exist. The assessment has instead been based on a Predicted No Effects Concentration (PNEC). The absence of an EQS may indicate that a substance is less well characterised or of lower environmental concern. Assessment of the related cyanide species, for which an EQS is present, indicates that measured cyanide concentrations do not present a significant level of risk.

Although the distribution of free and total cyanide does not form such an apparent plume-like distribution in SBB as thiocyanate, the maximum measured free and total cyanide concentrations coincide with the maximum measured thiocyanate concentrations in SBB_AUK_BH106. This indicates a likely link between these related cyanide species and supports the indicator approach of using total and free cyanide to assess risk.

Based on the above, and considering the conservatisms highlighted in Section 5.5.4, measured thiocyanate concentrations are considered unlikely to present a significant risk to the identified water resource receptor (River Tees).

5.5.4.3 Benzo(a)pyrene

Benzo(a)pyrene marginally exceeded the SSAC in two sentinel wells (maximum 0.12μg/l vs. SSAC of 0.0509). These two wells (BH-2013 and BH-2014) have been sampled on three occasions. Measured benzo(a)pyrene concentrations on the other two monitoring visits were below the SSAC and also below laboratory MDL in most instances (single exception of BH-2013 on 8th March 2021, measured concentration of 0.05μg/l).

Based on the above, and considering the conservatisms highlighted in Section 5.5.4, measured benzo(a)pyrene concentrations are considered unlikely to present a significant risk to the identified water resource receptor (River Tees).

5.6 Water Resource Risk Evaluation

Multiple CoC including metals and inorganics, hydrocarbons and organic compounds exceeded the EQS in groundwater in both the sentinel wells and from the wider site. This represents a point of compliance immediately prior to the River Tees.

Dilution in the receiving surface water body (River Tees) has been further considered by the calculation of SSAC. This assessment indicates that a limited number of CoC, sampled from the 67 wells from across the site, exceed the SSAC derived including hydrocarbons (TPH and PAH), phenols, cyanide, thiocyanate, ammoniacal nitrogen and hexavalent chromium. Monitoring well locations where concentrations exceed the SSAC with dilution include:

- BH-2001
- BH-2004
- BH-2005
- BH-2006
- BH-2009
- BH-2010
- BH-2013
- BH-2014
- BH-2024
- BH-2025

- SBA AUK BH103
- SBA AUK BH104
- SBA AUK BH105
- SBA AUK BH106
- SBA_AUK_BH108
 SBA_AUK_BH110
- SBB AUK BH101
- SBB AUK BH102
- SBB AUK BH103
- SBB AUK BH104
- SBB AUK BH105
- SBB AUK BH106
- SBB_AUK_BH108
- SBB XXX BH204A
- SBC AUK BH101
- SBC_AUK_BH102
- SBC AUK BH104
- SBC_AUK_BH106
- SBC_AUK_BH107
- SBC_AUK_BH112
- SBC_AUK_BH113
- SBC AUK BH114
- SBC AUK BH115

Several of the site wide wells where the SSAC were exceeded are in the area of the SBCO, this includes SBA_AUK_BH105, SBA_AUK_BH110, SBC_AUK_BH106, SBC_AUK_BH107, SBC_AUK_BH112 and SBC_AUK_BH114. SBA_AUK_BH105 and SBA_AUK_BH110 were included in the modelled groundwater source area. SBC_AUK_BH107 and SBC_AUK_BH114 are located south of SBA_AUK_BH105 and SBA_AUK_BH110 in relatively close proximity (approximately 70m). SBC_AUK_BH106 is to the east of SBCO.

Review of the distribution indicates that the CoC exceeding the SSAC in the five wells identified above are likely associated with a localised source around SBCO, rather than the Made Ground across the site. The majority of the CoC in this area were assessed in the SBA DQRA which concluded that a significant risk to water resources was not present based on the attenuation occurring during lateral migration and subsequent dilution in the River Tees. SBA_AUK_BH103 and SBC_AUK_BH113 are also potentially down gradient of this area and maybe associated with the plume.

Monitoring wells SBA_AUK_BH106, SBA_AUK_BH104, SBA_AUK_BH108, SBC_AUK_BH101 and SBC_AUK_BH102, screen lower permeability natural geology and are spread across the site with a single CoC exceeding at each location. These locations are between 400m and 1,200m from the River Tees. The influence of concentrations associated with these wells on down gradient groundwater quality and the River Tees is considered to be limited.

Where measured concentrations of CoC exceed the SSAC, notably higher concentrations have sometimes been measured on one of multiple monitoring visits. This is the case in SBA (three rounds of monitoring undertaken) for several of the wells where TPH or PAH concentrations exceed and may indicate entrainment of fines on some monitoring visits. Of note is SBA_AUK_BH103 (shallow installation) where naphthalene concentrations ranged from $5.2\mu g/l$ to $880\mu g/l$ and SBA_AUK_BH104 where aliphatic C6-C8 concentrations ranged from $40.1\mu g/l$ to $1,400\mu g/l$.

Other than the monitoring well locations discussed above, the remaining 18 locations exceeding the SSAC (including 10 sentinel wells) are locations where ammoniacal nitrogen, thiocyanate or benzo(a)pyrene also exceed. A limited number of additional CoC also exceeded SSAC in four of these wells, with wells generally screening deeper less permeable strata and no evidence of lateral migration into down gradient locations. The closest of these locations (SBB AUK BH108) is 300m from the River Tees.

Ammoniacal nitrogen exceeds the SSAC in several wells from across the site, including in a number of the sentinel wells: BH-2001, BH-2004, BH-2006, BH-2009, BH-2010, BH-2024 and BH-2025. The SSAC for ammoniacal nitrogen has been reviewed based on the width of the site where wells have measured ammoniacal nitrogen concentrations above the SSAC. The revised assessment criteria indicated that measured concentrations of ammoniacal nitrogen do not present a risk to the River Tees.

Thiocyanate exceeds the SSAC in several wells from across the site, including in a number of the sentinel wells: BH-2001, BH-2005, BH-2006, BH-2009 and BH-2010. Further assessment of the potential risk to the River Tees was undertaken. This look at multiple lines of evidence, including the revision of SSAC based on a more localised thiocyanate source and concluded that measured thiocyanate concentrations are considered unlikely to present a significant risk to the identified water resource receptor (River Tees).

Benzo(a)pyrene exceeds the SSAC in several wells from across the site, including in two of the sentinel wells: BH-2013 and BH2014. Further assessment of the three rounds of monitoring undertaken indicated that concentrations were generally below the SSAC and only marginally above on a single occasion.

Review of the site wide exceedances of the SSAC above indicates that assessment using the 17 sentinel wells is appropriate to further assess the potential risk to the River Tees. Based on the SSAC derived, none of the measured concentrations from the sentinel wells exceed the SSAC (with the exception of benzo(a)pyrene in two wells on a single occasion, thiocyanate and ammoniacal nitrogen). A number of conservative assumptions were identified in Section 5.5.4 which were used to consider the potential risk further. The further assessment highlighted that benzo(a)pyrene, thiocyanate and ammoniacal nitrogen are unlikely to present a significant risk to the identified water resource receptor (River Tees). As such, the risk to water resource receptors (River Tees) is not considered significant.

5.6.1 Other Considerations

Non-aqueous Phase Liquid has been measured on site. This may require consideration as part of remediation works however, dissolved phase concentrations indicate that NAPL is not presenting a risk to water resources.

A potential pathway due to piled foundations was identified under the pollutant linkages. Based on the findings of the contaminant distribution and underlying ground conditions, it is considered unlikely that this pathway could represent a significant risk to water resources. Although contamination may locally be able to enter the underlying natural deposits around piles, lateral migration within the unit is unlikely to be significant.

5.7 Assumption, Limitation and Data Gaps

The SSAC defined to offer protection to the identified water resource receptors are based on current best practice and are defined using the site investigation data available at the present time. Modifications to the conceptual model, such as the collection of additional site data, may result in changes to the SSAC defined here.

6 Conclusions

A DQRA has been completed for the site, based on the available investigation and monitoring data and focused on potential risks to water resource receptors.

Based on the findings of the previous SBA DQRA (Arcadis, 2021d) and the review of the CSM undertaken in this DQRA, the **Groundwater Source** in the area of SBA_AUK_BH110 (interpreted to be associated with the SBCO), is not considered to present a significant risk to the identified water resource receptor (River Tees).

The findings of the water resource assessment for the **Made Ground Source** undertaken in this DQRA concludes that the site does not present a significant risk to the River Tees.

This assessment supersedes the assessment of the Made Ground Source undertaken in the first issue of the SBA DQRA (Arcadis, 2021d) which also concluded that the Made Ground (SBA) does not present a significant level of risk to the River Tees.

The criteria developed in this assessment may potentially be used to assess other areas of the Teesworks site where Made Ground is a single source. However, first a detailed conceptual review of any areas assessed in future needs to be undertaken. In particular, confirming sources, pathways and receptors remain applicable.

6.1.1 Other Considerations

Non-aqueous Phase Liquid has been measured on site. This may require consideration as part of remediation works however, dissolved phase concentrations indicate that NAPL is not presenting a risk to water resources.

A potential pathway due to piled foundations was identified under the pollutant linkages. Based on the findings of the contaminant distribution and underlying ground conditions, it is considered unlikely that this pathway could represent a significant risk to water resources. Although contamination may locally be able to enter the underlying natural deposits around piles, lateral migration within the unit is unlikely to be significant.

It is recommended that risks to human health are also considered at the design stage of any proposed redevelopment based on the findings of the GQRA with regards to dermal, ingestion and inhalation pathways.

7 References

Department for Environment, Food and Rural Affairs (DEFRA), 2012. Contaminated Land Statutory Guidance, which came into force on 6th April 2012.

Department of the Environment (DoE), 1989. Water Supply (Water Quality) Regulations. England and Wales. HMSO.

Department of Environment, Transport and Regions (DETR), 2000. Water Supply (Water Quality) Regulations. England and Wales. HMSO.


Environment Agency, 2006. Remedial Targets Methodology: Hydrogeological Risk Assessment for Land Contamination.


Environment Agency, 2017. Groundwater Protection – Land contamination groundwater compliance points: quantitative risk assessment, March 2017.


Environment Agency (EA), 2020. Land Contamination Risk Management (LCRM). Last updated 19th April 2021).


Habitats Directive Technical Advisory Group on Water Quality (2005). Ammonia standards in estuaries, WQTAG086. Revised: 20th April 2005.


Figures

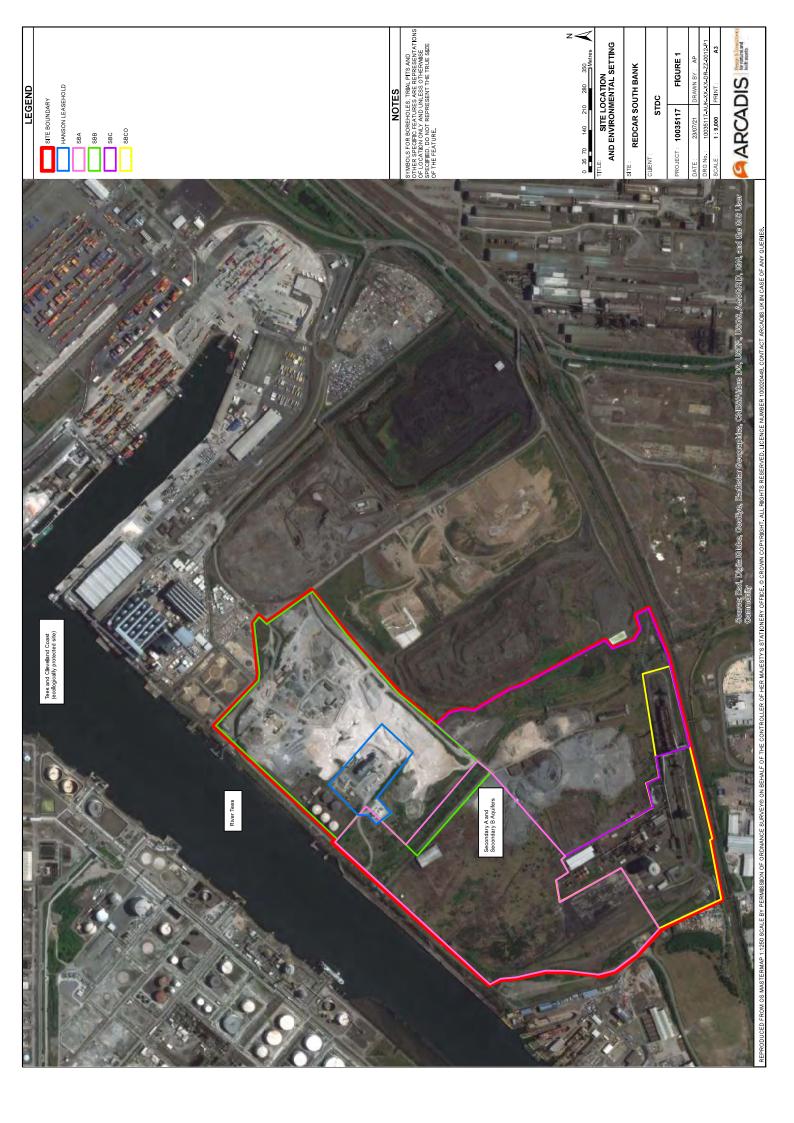


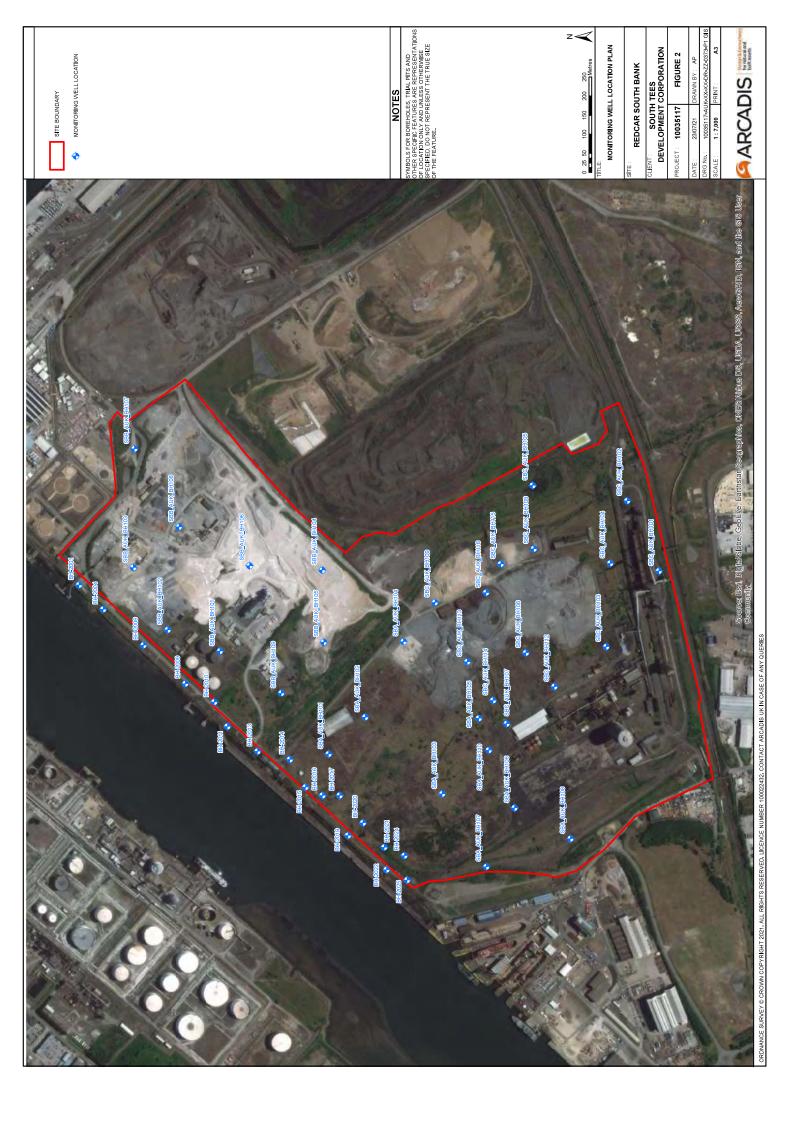


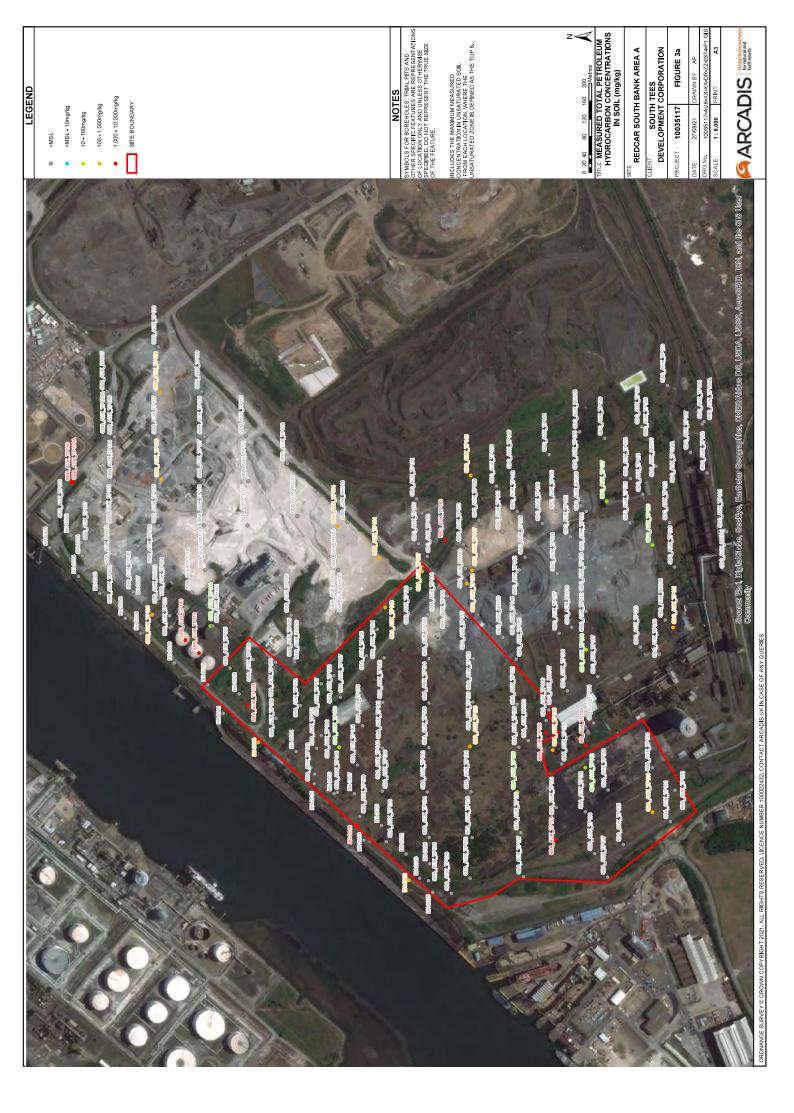


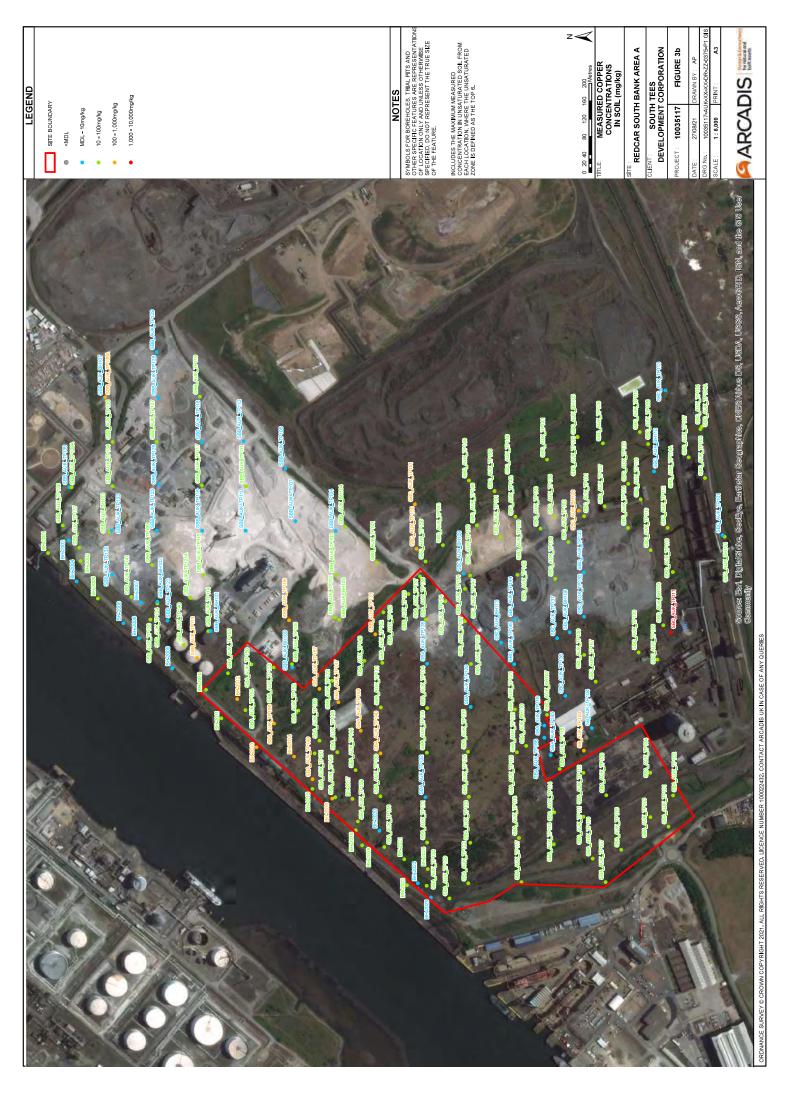


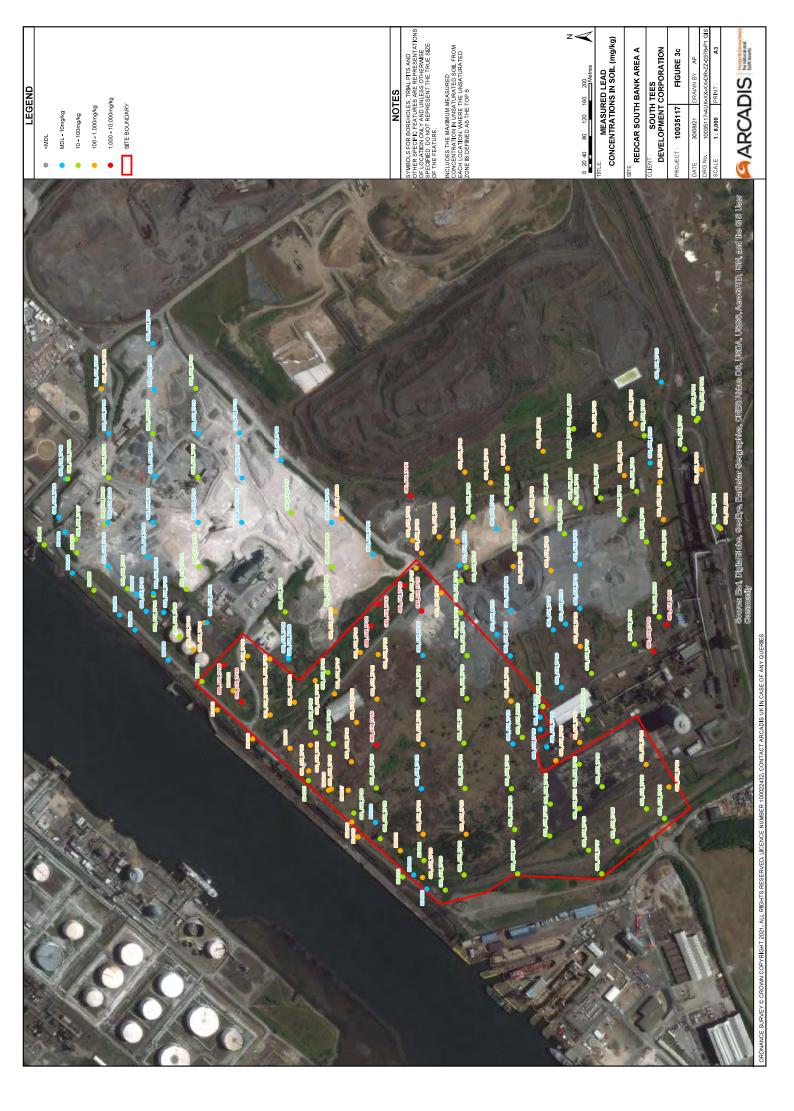


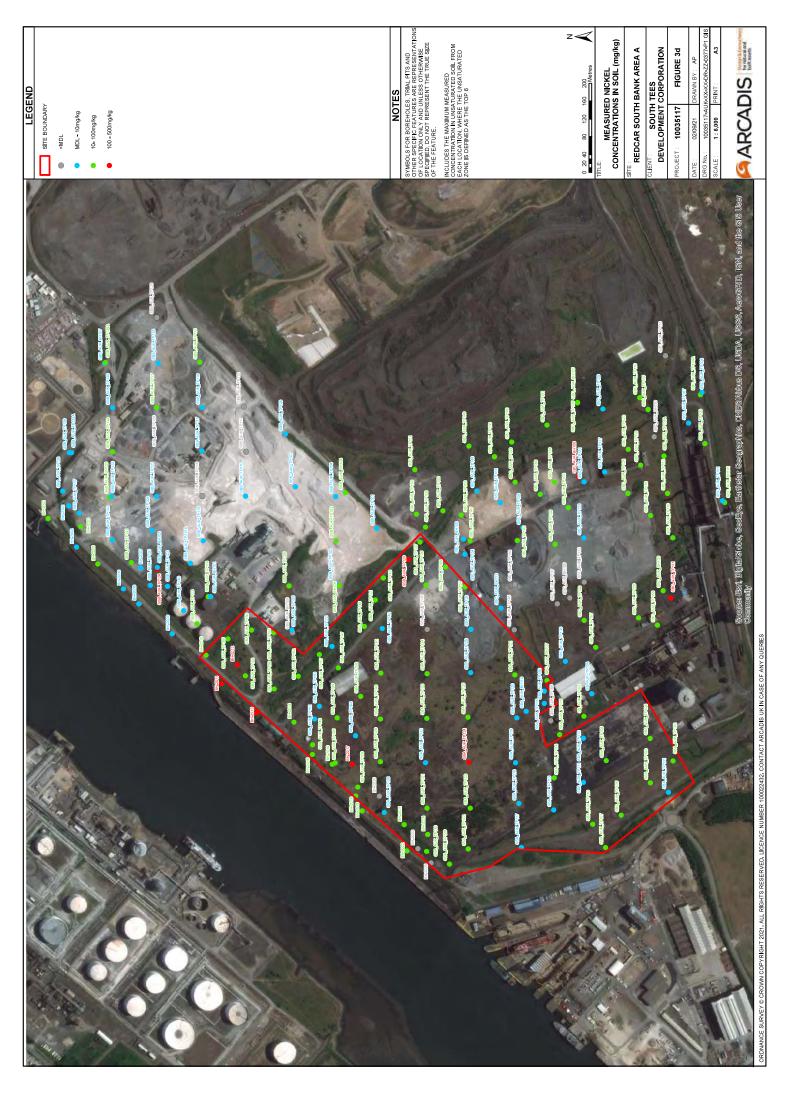

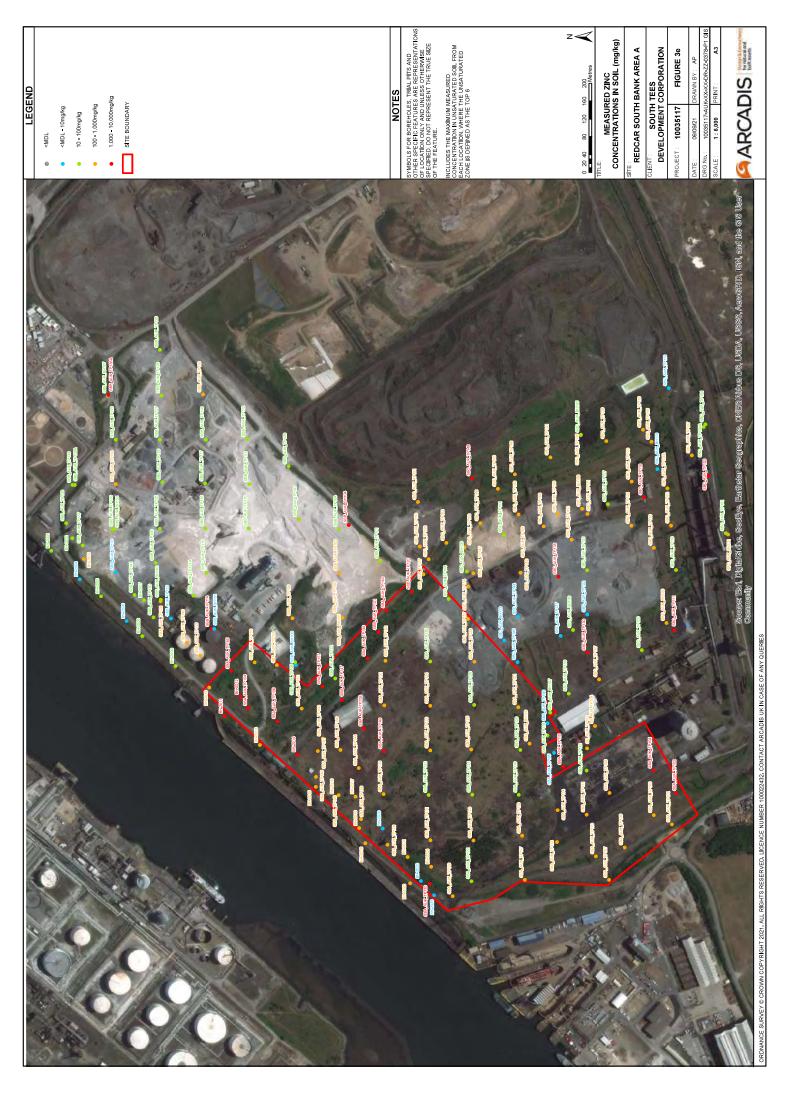

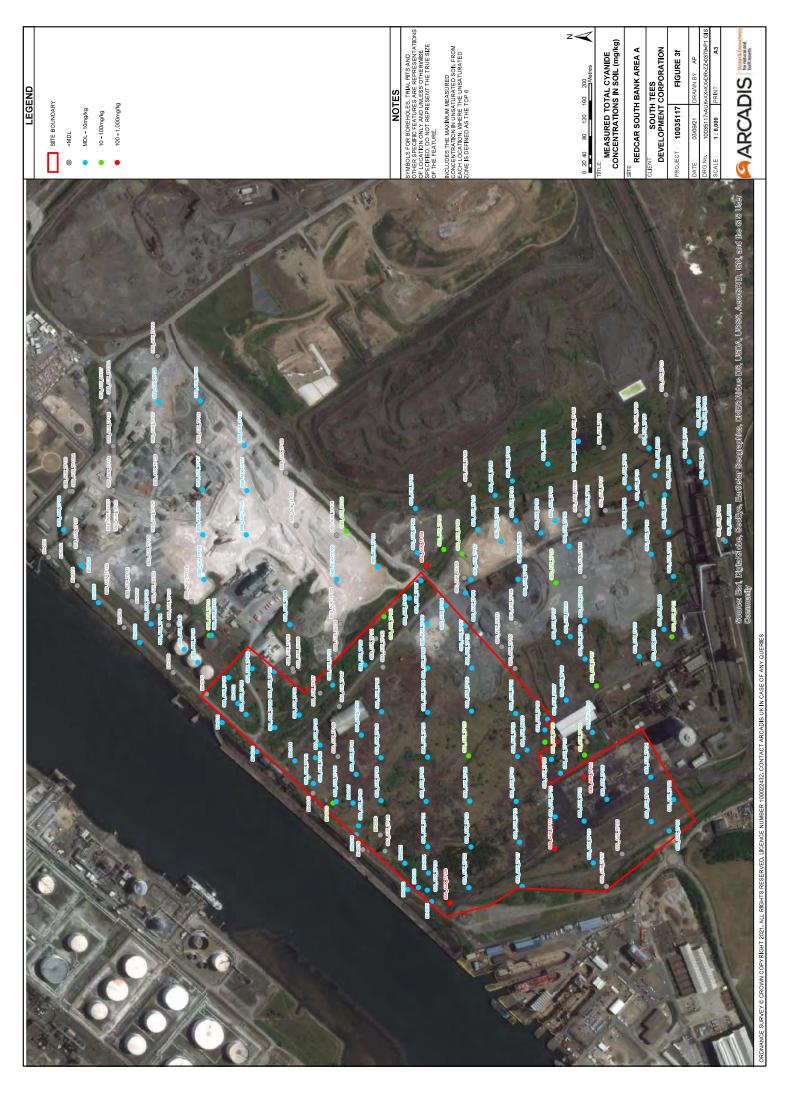

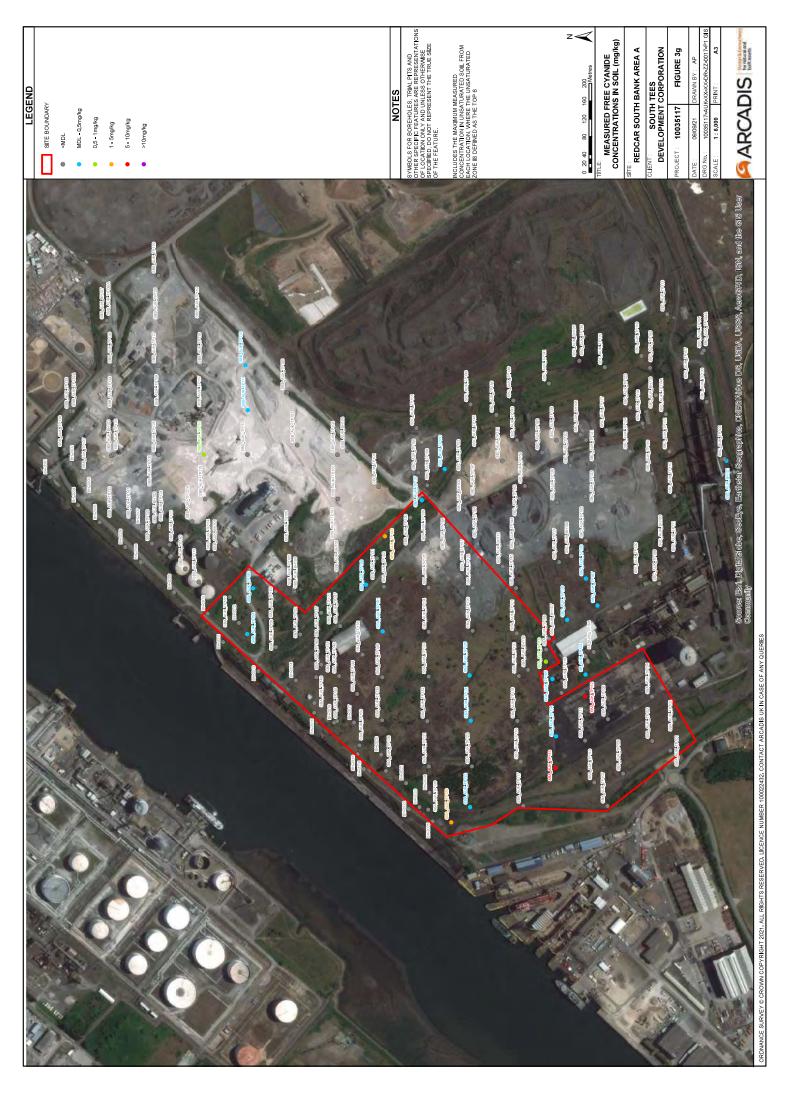


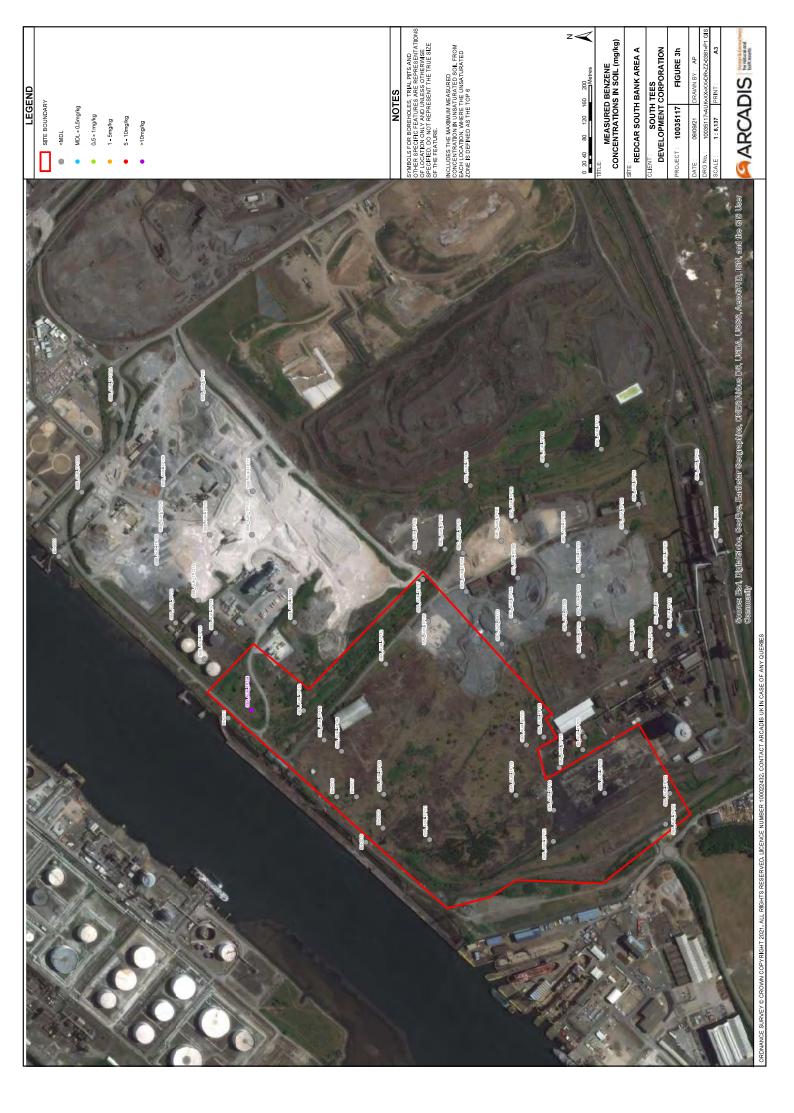







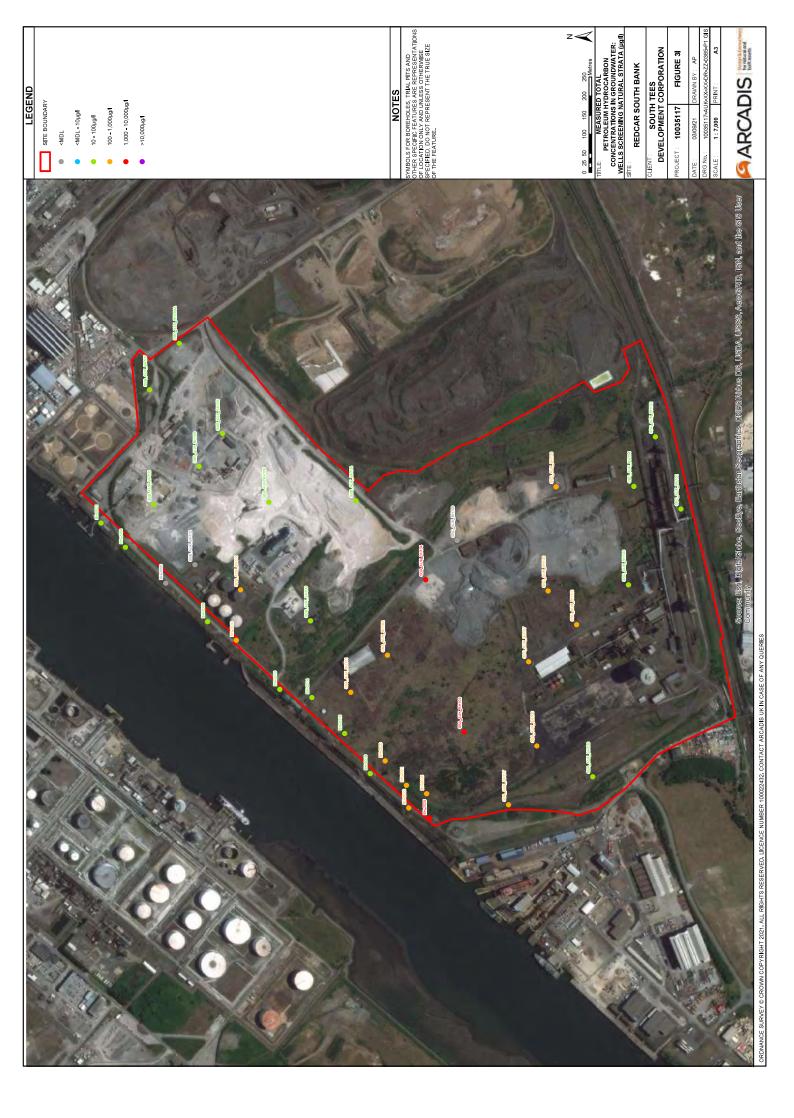
































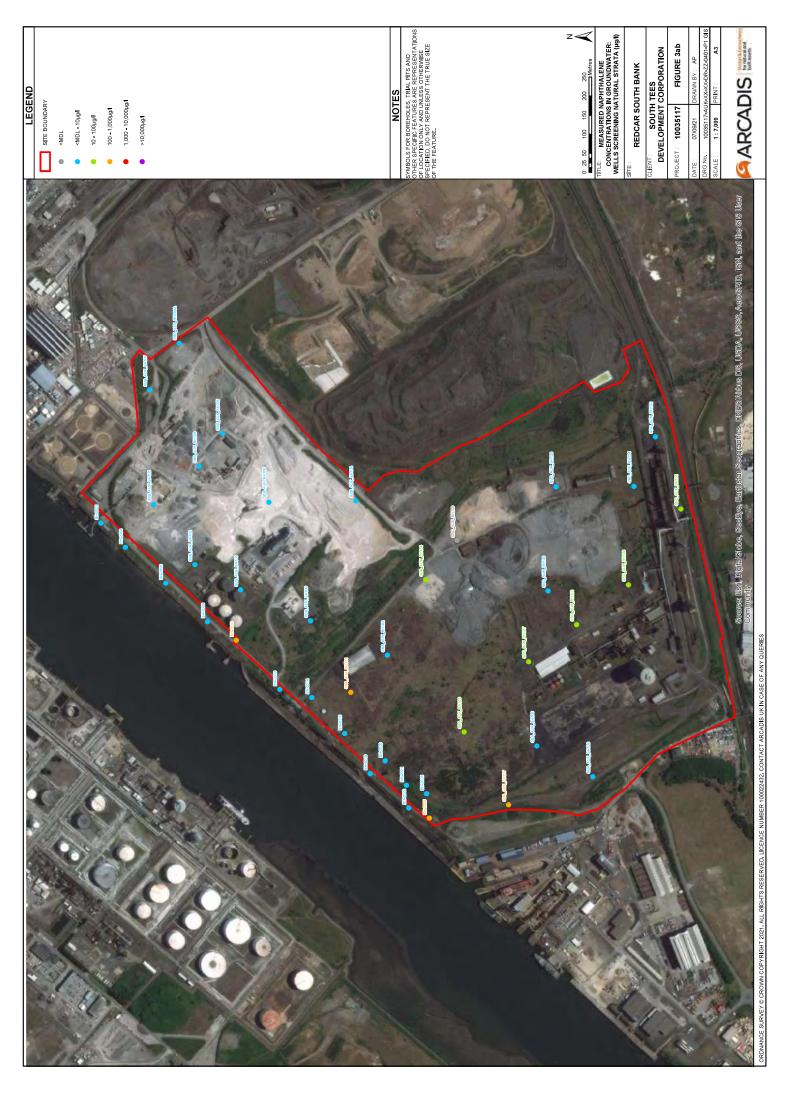










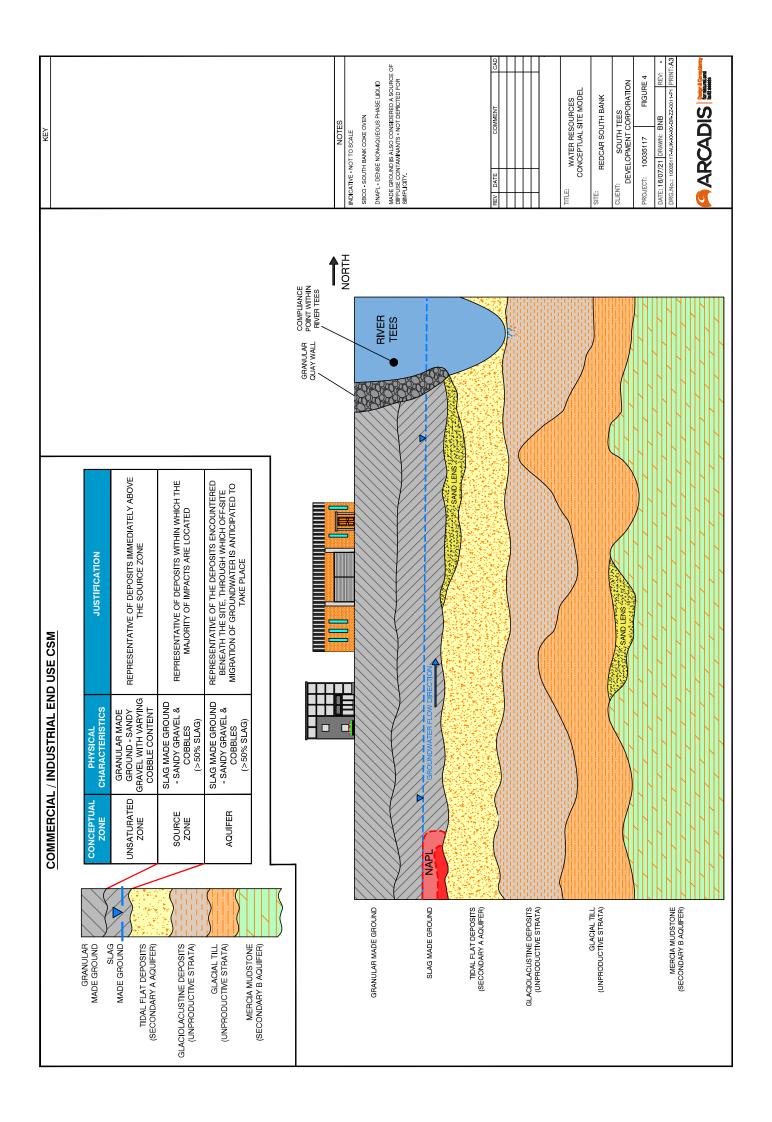

Tables

Section 1984 Sec Pirk 94 208 720 72 - Veg					Tobl		edcar South Ba		lodol	
Control of the Protection 19					Tabl	e I. Selection o	Contaminants	or Concern to M	oder	
CS-CS Apparation	Analyte	Units	Quality		Samples			Environmental		Justification
Control of the property Control of the p										
Second part										
Col. Col. All publics			See TPH	19						
Control Cont										
C-11-CT-15 (Applications of pill) See T-991*** 40 203 30 4 5 - Very Control of the Control of the Control of Control										
	>C21-C35 Aliphatics		See TPH	43	203	98	4.9		Yes	
SCOPE CAN Amenation Wild See Trivi 14 300 5600 85 - Verill										
FEST First 1								~		
SECTION 1		μg/L								Assessed in line with UK guidance for the assessment of petroleum hydrocarbon
## CENTER OF Amenates 1941 564 720 720 770 780 770 780										contamination (EA, 2005) which recommends the use of speciated TPH fractions
Trail of SCOR Anomatics 0,1 Sea TIPP 50 144 70000 106 Yes Yes Yes Sea TIPP 50 144 70000 106 Yes Yes Yes Sea TIPP 50 144 70000 106 Yes Y	>EC16-EC21 Aromatics		See TPH	54	203	280	7.6		Yes	
Sun Thm S-CS-CS-MA A								~		not the assessment of map sylenes and o sylenes.
Sum The 1-SC-Out Ail A Ann Mg Sum The 1-SC-Out Ail A Ann Mg Sum The 1-SC-Out Ail A Ann Mg Sum The 1-SC-Out Ail Ann Mg Sum The 1-SC-Out A								Yes		
Towards gpL 74" 30 450 450 47 4 4 4 4 4 4 4 4			50#1					Yes	Yes	
Ellyhearche										
Nymer (p)										
Nyme O O O O O O O O O										
System 1										1
Naphtheene	Xylene Total	μg/L	30#5			920		Yes	Yes	
Accraphthine			o#2					V		
Accessibility Accession										
Authoracene MgA			~					~		
Penanthriene				149	203	260	1.1	Yes	Yes	
Fluorene 1971. — 160 203 240 9.6 — 156 1975. — 156 197										Indicator approach adopted for the approximent of Dalyayelia Arometic
Caryyagen								~		
Pymene								~		assessment comprise those for which Environmental Quality Standards are
Benzole Infracement 1911. 46 203 100 0.45 Yes' Benzole Infracement 1971. 3ee Balp** 42 203 110 0.46 Yes' Benzole Infracement 1971. 3ee Balp** 42 203 61 0.36 Yes' Benzole Infracement 1971. 3ee Balp** 42 203 74 0.36 Yes' Diemerical Infrarement 1971. 22 203 74 0.36 Yes' Diemerical Infrarement 1971. 22 203 74 0.36 Yes' Diemerical Infrarement 1971. 162 203 74 0.38 Yes' Diemerical Infrarement 1971. 162 203 1100 200 Yes' Diemerical Infrarement 1971. 100 100 100 55 Yes' Diemerical Infrarement 1971. 100 100 0.88 0.33 Yes' Diemerical Infrarement 1971. 100 100 0.88 0.35 Yes' Diemerical Infrarement 1971. 150 100 100 72 Yes' Diemerical Infrarement 1971. 150 100 100 72 Yes' Diemerical Infrarement 1971. 150 100 100 72 Yes' Diemerical Infrarement 1971. 150 100 100 100 72 Yes' Diemerical Infrarement 1971. 150 100	Pyrene		~							
Benzo(s)(pyrene yg1, 0.000179 32 233 61 0.36 - Veri			~ C D-D#6							benzo(a)pyrene (in line with the WFD, 2015, benzo(a)yrene is considered to
Benzo(a)pyrene										
Banzolg, Njaperjeene ypl. See Bap ^{rile} 43 203 45 0.29 ~ Yes								Yes		(5,.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,
Indemotit 2.3-cd/pyrene			~ #6							
PAHS (Sum of total) μg/L - 16 203 11000 306 - Ves										
Martinis										-
Antimony gg/L 25° 30 30 6.6 1.5 No Yes Arsenic (Filtered) gg/L 25° 30 30 6.6 1.5 No Yes Arsenic (Filtered) gg/L - 10 10 140 72 - Yes Barlum gg/L - 10 10 140 72 - Yes Berlyflium (Filtered) gg/L - 55 55 84 37 - Yes Berlyflium (Filtered) gg/L - 2 2 55 0.2 0.055 - Yes Berlyflium (Filtered) gg/L - 2 2 55 0.2 0.055 - Yes Boron gg/L 7000° 29 30 1500 75° Yes Yes Boron gg/L 7000° 29 30 1500 75° Yes Yes Boron gg/L 0.2° 8 30 0.14 0.027 Yes Yes Cadmium (Filtered) gg/L 0.6° 11 203 280 6.2 Yes Yes Chromium (Filtered) gg/L 0.6° 113 142 160 6.6 Yes Yes Chromium (Filtered) gg/L 0.6° 8 12 4.8 0.81 Yes Yes Chromium (Filtered) gg/L - 2 27 88 3 1 - Yes Chromium (Trivalent) gg/L 0.6° 8 12 4.8 0.81 Yes Yes Chromium (Trivalent) gg/L 3.7° 18 30 11 1.4 Yes Yes Copper (Filtered) gg/L 3.7° 18 30 11 1.4 Yes Yes Copper (Filtered) gg/L 3.7° 103 1773 16 1.3 Yes Yes Ves Yes Yes Ves Yes Yes Yes Yes Yes Ves Yes Ves Yes										
Assenic Mg/L 25 ¹² 30 30 6.6 1.5 No Yes Assenic (Filtered) Mg/L 25 ¹² 173 173 17 2.5 No Yes Bartum Mg/L 55 55 84 37 Yes No Yes Assenic (Filtered) Mg/L 55 55 84 37 Yes Yes No No Yes No No Yes Yes No Yes Yes No Yes Yes No Yes										
Asenic (Filtered) yg/L 25 rd 173 173 17 2.5 No Yes Barium yg/L 10 10 140 72 Yes Beryllum (Filtered) yg/L 55 55 54 37 Yes Beryllum (Filtered) yg/L 55 55 54 37 Yes Beryllum (Filtered) yg/L 2 55 0.2 0.055 Yes Boron yg/L 7000 rd 29 30 1500 757 Yes Yes Boron yg/L 7000 rd 173 173 57000 3842 Yes Yes Cadmium yg/L 0.2 ^{gr} 8 30 0.14 0.027 Yes Yes Cadmium yg/L 0.2 ^{gr} 39 173 0.40 0.033 Yes Yes Cadmium yg/L 0.6 ^{gr} 11 203 280 6.2 Yes Yes Chromium (hexavalent) yg/L 0.6 ^{gr} 11 203 280 6.6 Yes Yes Chromium (Filtered) yg/L 0.6 ^{gr} 8 12 4.8 0.81 Yes Yes Chromium (Filtered) yg/L 27 88 3 1 - Yes Chromium (Trivalent) yg/L 3.7 ^{gr} 18 30 11 1.4 Yes Yes Chromium (Trivalent) yg/L 3.7 ^{gr} 18 30 11 1.4 Yes Yes Copper (Filtered) yg/L 3.7 ^{gr} 18 30 11 1.4 Yes Yes Iron yg/L 1.3 ^{gr} 17 30 4.4 1.5 Yes Yes Iron yg/L 1.3 ^{gr} 17 30 4.4 1.5 Yes Yes Lead yg/L 1.3 ^{gr} 17 30 4.4 1.5 Yes Yes Manganese yg/L 1.3 ^{gr} 17 30 4.4 1.5 Yes Yes Mercury yg/L 0.0 ^{grio} 9 173 0.43 0.03 Yes Yes Mercury yg/L 0.0 ^{grio} 9 173 0.43 0.03 Yes Yes Mercury yg/L 0.0 ^{grio} 9 173 0.43 0.03 Yes Yes Mercury yg/L 0.0 ^{grio} 9 173 0.43 0.03 Yes Yes Mercury yg/L 0.0 ^{grio} 9 173 0.43 0.03 Yes Yes Mercury yg/L 0.0 ^{grio} 9 173 0.43 0.03 Yes Yes Mercury yg/L 0.0 ^{grio} 9 173 0.43 0.03 Yes Yes Mercury yg/L 0.0 ^{grio} 9 173 0.43 0.03 Yes Yes Mercury yg/L 0.0 ^{grio} 9 173 0.43 0.03 Yes Yes Mercury yg/L 0.0 ^{grio} 9 173 0.43 0.03 Yes Yes Mercury yg/L 0.0 ^{grio} 9 10 4.1 1.3 No Yes Yes Nickel (Filtered) yg/L 0										
Beryllum (Filtered)										
Beryllium (Filtered)	Barium	μg/L							Yes ¹	
Boron										
Boron (Filtered) yg/L 7000 ¹⁶ 173 173 57000 3642 Yes Yes Yes Cadmium (Filtered) yg/L 0.2 ²⁷ 8 30 0.14 0.027 Yes Yes Yes Yes Chromium (hexavalent) yg/L 0.6 ⁶⁷ 111 203 280 6.2 Yes Yes Yes Chromium (hitered) yg/L 0.6 ⁶⁷ 113 142 160 6.6 Yes Yes Yes Yes Chromium (filtered) yg/L 0.6 ⁶⁷ 8 12 4.8 0.81 Yes Ye										
Cadmium (Filtered) µg/L 0.2 ⁸⁷ 8 30 0.14 0.027 Yes Yes Yes Cadmium (Filtered) µg/L 0.2 ⁸⁷ 39 173 0.49 0.033 Yes			7000#5							
Chromium (hexavalent)		µg/L								
Chromium										
Chromium (Filtered) µg/L 0.6*7 8 12 4.8 0.81 Yes Yes Yes Chromium (Trivalent) µg/L ~ 27 88 3 1 ~ Yes Yes Thromium (Trivalent) µg/L ~ 12 67 5 0.69 ~ Yes Thromium (Trivalent) µg/L 3.76** 18 30 11 1.4 Yes										
Chromium (Trivalent) yg/L - 27 88 3 1 - Yes										
Chromium (Trivalent) (Filtered) µg/L 3.76 18 30 11 1.4 Yes Yes	Chromium (Trivalent)	μg/L		27	88	3	1			Indicator approach adopted for the assessment of metals, which were detected
Copper (Filtered) µg/L 3.76 [®] 103 173 18 1.3 Yes Yes While arsenic and vanadium did not exceed the relevant EQS, they have been included for completeness. Iron (Filtered) µg/L 10000 ^{®2} 29 30 2000 243 Yes Yes Lead µg/L 1.3 ⁸⁷ 17 30 4.4 1.5 Yes Yes Lead (Filtered) µg/L 1.3 ⁸⁷ 130 173 63 0.88 Yes Yes Manganese µg/L ~ 20 20 4300 701 ~ Yes Mercury µg/L 0.07 ^{#10} 19 30 0.55 0.071 Yes Yes Molybdenum µg/L ~ 28 30 100 21 ~ Yes Nickel µg/L ~ 127 135 110 20 ~ Yes Nickel (Filtered) µg/L 8.6 ⁸⁷ 26 30 6.6 1.5 Yes </td <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>in the majoriy of samples analysed. The metals selected for further assessment</td>										in the majoriy of samples analysed. The metals selected for further assessment
Iron			3.76**							
Iron (Filtered) µg/L 1000 ⁸² 135 135 7700 438 Yes Yes Lead µg/L 1.3 ⁸⁷ 17 30 4.4 1.5 Yes Yes Lead (Filtered) µg/L 1.3 ⁸⁷ 130 173 63 0.88 Yes Yes Manganese µg/L ~ 20 20 4300 701 ~ Yes¹ Mercury µg/L 0.07 ⁸¹⁰ 19 30 0.55 0.071 Yes Yes Mercury (Filtered) µg/L 0.07 ⁸¹⁰ 98 173 0.43 0.038 Yes Yes Molybdenum µg/L ~ 28 30 100 21 ~ Yes Molybdenum µg/L ~ 127 135 110 20 ~ Yes Nickel µg/L 8.6 ⁸⁷ 26 30 6.6 1.5 Yes Yes Nickel (Filtered) µg/L 7 <td></td>										
Lead (Filtered) µg/L 1.3 ⁸⁷ 130 173 63 0.88 Yes Yes Manganese µg/L ~ 20 20 4300 701 ~ Yes Mercury µg/L 0.07°** 19 30 0.55 0.071 Yes Yes Mercury (Filtered) µg/L 0.07°** 98 173 0.43 0.038 Yes Yes Molybdenum µg/L ~ 28 30 100 21 ~ Yes Nokel µg/L ~ 127 135 110 20 ~ Yes Nickel µg/L 8.6°7 26 30 6.6 1.5 Yes Yes Nickel (Filtered) µg/L 8.6°7 154 173 67 3.1 Yes Yes Selenium (Filtered) µg/L 7 54 55 12 4.2 ~ Yes' Vanadium µg/L 100 9		μg/L								
Manganese µg/L ~ 20 20 4300 701 ~ Yes¹ Mercury µg/L 0.07*10 19 30 0.55 0.071 Yes Yes Mercury (Filtered) µg/L 0.07*10 98 173 0.43 0.038 Yes Yes Molybdenum µg/L ~ 28 30 100 21 ~ Yes Molybdenum (Filtered) µg/L ~ 127 135 110 20 ~ Yes Nickel µg/L 8.6*7 26 30 6.6 1.5 Yes Yes Nickel (Filtered) µg/L 8.6*7 154 173 67 3.1 Yes Yes Selenium (Filtered) µg/L - 54 55 12 4.2 ~ Yes¹ Vanadium µg/L 100 9 10 4.1 1.3 No Yes Zinc µg/L 7.9 26<										
Mercury µg/L 0.07 ^{#10} 19 30 0.55 0.071 Yes Yes Mercury (Filtered) µg/L 0.07 ^{#10} 98 173 0.43 0.038 Yes Yes Molybdenum µg/L ~ 28 30 100 21 ~ Yes Molybdenum (Filtered) µg/L ~ 127 135 110 20 ~ Yes Nickel µg/L 8.6 ⁸⁷ 26 30 6.6 1.5 Yes Yes Nickel (Filtered) µg/L 8.6 ⁸⁷ 154 173 67 3.1 Yes Yes Selenium (Filtered) µg/L - 54 55 12 4.2 ~ Yes ¹ Vanadium µg/L 100 9 10 4.1 1.3 No Yes Vanadium (Filtered) µg/L 7.9 26 30 61 15 Yes Yes										
Molybdenum µg/L ~ 28 30 100 21 ~ Yes Molybdenum (Filtered) µg/L ~ 127 135 110 20 ~ Yes Nickel µg/L 8.6 ⁸⁷ 26 30 6.6 1.5 Yes Yes Nickel (Filtered) µg/L 8.6 ⁸⁷ 154 173 67 3.1 Yes Yes Selenium (Filtered) µg/L ~ 54 55 12 4.2 ~ Yes¹ Vanadium µg/L 100 9 10 4.1 1.3 No Yes Zinc µg/L 7.9 26 30 61 15 Yes Yes			0.07#10	19			0.071		Yes	
Molybdenum (Filtered) µg/L ~ 127 135 110 20 ~ Yes Nickel µg/L 8.6*7 26 30 6.6 1.5 Yes Yes Nickel (Filtered) µg/L 8.6*7 154 173 67 3.1 Yes Yes Selenium (Filtered) µg/L - 54 55 12 4.2 ~ Yes¹ Vanadium µg/L 100 9 10 4.1 1.3 No Yes Vanadium (Filtered) µg/L 100 43 55 7.8 1.4 No Yes Zinc µg/L 7.9 26 30 61 15 Yes Yes								Yes		
Nickel µg/L 8.6" 26 30 6.6 1.5 Yes Yes Nickel (Filtered) µg/L 8.6" 154 173 67 3.1 Yes Yes Selenium (Filtered) µg/L ~ 54 55 12 4.2 ~ Yes¹ Vanadium µg/L 100 9 10 4.1 1.3 No Yes Vanadium (Filtered) µg/L 100 43 55 7.8 1.4 No Yes Zinc µg/L 7.9 26 30 61 15 Yes Yes								~		
Selenium (Filtered) µg/L ~ 54 55 12 4.2 ~ Yes¹ Vanadium µg/L 100 9 10 4.1 1.3 No Yes Vanadium (Filtered) µg/L 100 43 55 7.8 1.4 No Yes Zinc µg/L 7.9 26 30 61 15 Yes Yes	Nickel	μg/L		26	30	6.6	1.5		Yes	
Vanadium µg/L 100 9 10 4.1 1.3 No Yes Vanadium (Filtered) µg/L 100 43 55 7.8 1.4 No Yes Zinc µg/L 7.9 26 30 61 15 Yes Yes										
Vanadium (Filtered) µg/L 100 43 55 7.8 1.4 No Yes Zinc µg/L 7.9 26 30 61 15 Yes Yes										
	Vanadium (Filtered)	μg/L	100	43	55	7.8	1.4	No	Yes	
رسان (1 πιοτού) μμ/ι∟ 1.5 1.50 1/3 500 5.2 165 165 165	Zinc (Filtered)	μg/L μg/L	7.9	138	30 173	300	9.2	Yes Yes	Yes Yes	

Notes

Includes contaminants of concern measured above the laboratory method detection limit during groundwater monitoring undertaken between October 2020 and June 2021 across the South Bank Redcar site (i.e. between one and three sampling events per monitoring well location, depending on the date of installation of the monitoring well). Compounds that are present in seawater (primarily associated with inorganics such as magnesium, chloride and carbonate), have not been included given that a large proportion of the land included within the Site boundary is relaimed land.

Environmental Quality Standards adopted for the purpose of deriving Site Specific Assessment Criteria. Further contaminant specific details are provided in the notes below, along with the source of the Environmental Quality Standard.

No Environmental Quality Standards readily available

Compound indirectly assessed through the use of indicator compounds Yes¹ Yes Compound exceeds Environmental Quality Standard Compound considered to require further consideration following screening

#1:No UK EQS for total petroleum hydrocarbons (TPH), or speciated TPH fractions. A value of 50 µg/l is adopted for sum TPH protection of surface water based on 50µg/l-1000µg/l (Surface Waters (Abstraction for Drinking Water) Regulations 1989). For the purpose of calculating Site Specific Assessment Criteria, the standard of 50 µg/l has been split between the 11 TPH fractions assessed (i.e. compliance criteria of 4.5µg/l).
#2:Water Framework Directive (Standards and Classification) Directions (England and Wales) 2015.
#3:Proposed Environmental Quality Standard, in absence of legislative standard (Ayscough et al., 2002). https://assets.publishing.service.gov.uk/government/uploads/system/uploads/system/uploads/attachment_data/file/291223/sp2-115-tr4-e-e.pdf
#4:Operational Targets and EQS. EA. April 2018. Value of 30µg/l for sum xylenes split between isomers. Requires summation of m,p & o isomers to use 30µg/l value.
#5:Operational Targets and EQS. EA, April 2018
#6:Water Framework Directive (Standards and Classification) Directions (England and Wales) 2015. Benzo(a)pyrene can be considered as a marker for other PAH for comparison with the corresponding AA-EQS in water.
#7:Water Framework Directive (Standards & Classification) Directions (England & Wales) 2015. Dissolved fraction.
#8:Water Framework Directive (Standards and Classification) Directions (England and Wales) 2015. Dissolved Fraction. If DOC >1mg/l then a higher criteria may be applied, however this value has been adopted as an initial screening value.
#10:Water Framework Directive (Standards and Classification) Directions (England and Wales) 2015. Dissolved Fraction. MAC adopted in absence of AA value.

#11-Operational Targets and EQS. EA, April 2018. Dissolved plus ambient background concentration. For saltwater, an Ambient Background Concentration of 1.1 µg/l has been used as an initial screening value. #12-Operational Targets and EQS. EA, April 2018. Dissolved plus ambient background concentration. For saltwater, an Ambient Background Concentration of 1.1 µg/l has been used as an initial screening value. #13: European Chemicals Agency, REACH database, accessed 3 September 2021 (https://www.echa.europa.eu/information-on-chemicals/registered-substances). #14: Value for phenols adopted in the absence of a value for monohydric phenols.

					R	tedcar South Ba	ınk		
				Tabl	e 1: Selection o	f Contaminants	of Concern to M	lodel	
Analyte	Units	Environmental Quality Standard**	Number of Detects	Number of Samples Analysed	Maximum Concentration	Average Concentration	Exceeds Environmental Quality Standard	Consider Further?	Justification
Volatile and Semi Volatile Org	anic Comp	ounds							
Styrene	μg/L	50#5	7	182	43	1.1	No	No	No exceedances of the Environmental Quality Standard identified.
4.0. dib 2. abla		~		182	17	0.50	~	No	Measured above MDL in only one of 67 samples analysed, with the detection
1,2-dibromo-3-chloropropane Bromochloromethane	μg/L μg/L	~	1	182	4	0.59	~	No	identified in one location during one of three sampling events.
	μg/L	~	1	182	2	0.51	~	No	
	μg/L	~ #2	1	182	1	0.5	~	No	Measured above MDL in only one of >150 samples and generally in the same
Trichloroethene 2-nitroaniline	μg/L μg/L	10#2	1	182 163	4.7	0.5 1.4	No ~	No No	order of magnitude as the limit of detection. Where an Environmental Quality
3-nitroaniline	μg/L	~	1	163	2.6	1.3	~	No	Standard was available for comparison (trichloroethene), no exceedance was identified.
	μg/L	40#5	1	163	1.2	0.5	No	No	identined.
	µg/L	20#5	1	152 163	9	1.4	~ No	No No	
Di-n-octyl phthalate	μg/L	20	- '	103	9	1.4			Measured above MDL in approximatley 6% of samples analysed with the
1,2-dichloroethane	μg/L	10 ^{#2}	11	182	85	1.5	Yes	Yes	maximum concentration exceeding the Environmental Quality Standard. Measured above MDL in approximatley 4% of samples analysed with the
1,2-dichloropropane	μg/L	8#13	7	182	13	0.89	Yes	Yes	maximum concentration an order of magnitude higher than the laboratory detection limit.
4-chlorotoluene	μg/L	~	2	182	1	0.51	~	No	Measured above MDL in only two of 67 samples analysed, at the laboratory detection limit.
Bromodichloromethane	μg/L	~	6	182	6	2.1	~	Yes ¹	No environmental quality standard identified. Risk assessed via the more prevalent trihalomethane, chloroform, using indicator compound approach.
Chlorodibromomethane	μg/L	~	3	182	1	0.51	~ Yes	Yes ¹ Yes	Measured in a limited number of locations (<5% of samples). Measured above MDL in approximatley 10% of samples analysed with the
Chloroform	μg/L	2.5#2	19	182	30	1.5			maximum concentration exceeding the Environmental Quality Standard.
1,2-dichlorobenzene	μg/L	6.7#8	5	182	17		No ~	No Yes ¹	No exceedances of the Environmental Quality Standard identified.
1,4-dinitrobenzene 4-nitroaniline	μg/L μg/L	~	11 4	163 163	8.8	1.6 1.4	~	Yes ¹	predicted no effects concentration (PNEC) for aniline ublished on the European
	μg/L	1.2#13	11	163	220	3.4	Yes	Yes	Chemicals Agency (ECHA) REACH database, which measured concentrations exceed. Based on prevalence, availability of data and that aniline was measured
Azobenzene	μg/L	~	2	163	3.3	1.3	~	Yes ¹	at the highest concentration in this group, aniline has been adopted as an indicator compound
2-methylnaphthalene	μg/L	~	23	163	620	7.6	~	Yes ¹	
1-Methylnaphthalene tert-butylbenzene	μg/L μg/L	~	31 5	163 182	390	8.8 0.6	~	Yes ¹ Yes ¹	Indicator approach adopted. The compounds detected are typically associated
	μg/L	~	23	182	44	1.8	~	Yes ¹	with petroleum hydrocarbons, with the detections corresponding with samples in
1,2,4-trimethylbenzene	μg/L	~	14	182	55	1.8	~	Yes ¹	which petroleum hydrocarbons were also detected. As such, the remaining petroleum hydrocarbons, PAH and indicators included within the assessment are
Isopropylbenzene	μg/L	~	6	182	5		~	Yes ¹	considered to represent appropriate indicators for the assessment of these
	μg/L	~	2	182	8		~	Yes ¹	compounds.
Carbazole Dibenzofuran	μg/L μg/L	~	20 34	163 163	89 310	2.9		Yes ¹ Yes ¹	
Bis(2-ethylhexyl) phthalate	µg/L	1.3#2	16	163	12	1.5	Yes	Yes	Measured above MDL in approximatley 10% of samples analysed with the maximum concentration exceeding the Environmental Quality Standard.
Diethylphthalate	μg/L	200#5	8	163	6	1.4	No	No	No exceedances of the Environmental Quality Standard identified.
Di-n-butyl phthalate	μg/L	8#5	9	163	2.8	1.4	No	No	No exceedances of the Environmental Quality Standard identified.
Benzyl alcohol	ua/l		31	163	5.9	1.6	~	No	No EQS identified. Measured above MDL in approximately 20% of samples. Information published on the European Chemicals Agency (ECHA) REACH database cites a No effects concentration (NOEC) of 5 fmg/l (51,000µg/l) from a 2009 Japanese study. Benzyl alcohol is related to phenolic compounds, which are discussed below. Based on this, measured concentrations are unlikely to warrant further assessment.
2-methylphenol	μg/L μg/L	~	13	163	2300	26	~	Yes ¹	marran accoddings.
4-nitrophenol	μg/L	~	11	163	55	2.1	~	Yes ¹	
	μg/L	~	25	163	1100	13		Yes ¹	Phenol and monohydric phenols adopted as indicators for the assessment of
	μg/L	~	11	135	190	1.6	~	Yes ¹	phenolic compounds, which were typically detected in a number of samples and
Xylenols & Ethyl Phenols	μg/L	~	2 11	55 163	5 6100	0.15 56	~	Yes¹ Yes¹	at concentrations several orders of magnitude above the limit of detection. Phenol and monohydric phenols adopted on the basis that typically they were the
3-&4-methylphenol Cresol Total	μg/L μg/L	~	20	173	5200	33	~	Yes ¹	highest concentrations measured, with the remaining phenolic compounds
	μg/L	7.7#2	33	184	4000	37	Yes	Yes	generally detected in the same locations.
	μg/L	~	9		8.4			Yes ¹	
	μg/L	7.7#14	12	42	16000	1162	Yes	Yes	
	mg/L	0.021#2	193	203	360	16	Yes	Yes	Detected in nearly all samples analysed at concentrations several orders of magnitude higher than the laboratory detection limit. While ammoniacal nitrogen as N is naturally occuring in the environment, it has also been linked to specific activities undertaken on Site (such as ammonia scrubbers).
	μg/L	~	46	203	420	10		Yes ¹	Total cyanide has been adopted for the assessment of free and complex
	μg/L μg/L	1#2	125 53	203 55	3800 140	105 31	Yes ~	Yes Yes ¹	cyanide, given that the readily avaiable Environmental Quality Standard is for total cyanide.
							Vac		Detected in approximatley 53% of samples analysed with several measured
Thiocyanate (as SCN)	μg/L	9#13	88	165	1700000	27126	Yes	Yes	concentrations above the EQS.

Includes contaminants of concern measured above the laboratory method detection limit during groundwater monitoring undertaken between October 2020 and June 2021 across the South Bank Redcar site (i.e. between one and three sampling events per monitoring well location, depending on the date of installation of the monitoring well). Compounds that are present in seawater (primarily associated with inorganics such as magnesium, chloride and carbonate), have not been included given that a large proportion of the land included within the Site boundary is relaimed land.

Environmental Quality Standards adopted for the purpose of deriving Site Specific Assessment Criteria. Further contaminant specific details are provided in the notes below, along with the source of the Environmental Quality Standard.

No Environmental Quality Standards readily available

Yes'	Compound indirectly assessed through the use of indicator compounds
Yes	Compound exceeds Environmental Quality Standard
Yes	Compound considered to require further consideration following screening

#1:No UK EQS for total petroleum hydrocarbons (TPH), or speciated TPH fractions. A value of 50 µg/l is adopted for sum TPH protection of surface water based on 50µg/l-1000µg/l (Surface Waters (Abstraction for Drinking Water) Regulations 1999). For the purpose of calculating Site Specific Assessment Criteria, the standard of 50µg/l has been split between the 11 TPH fractions assessed (i.e. compliance criteria of 4.5µg/l).

#2:Water Framework Directive (Standards and Classification) Directions (England and Wales) 2015.

#3:Proposed Environmental Quality Standard, in absence of legislative standard (Ayscough et al., 2002). https://assets.publishing.service.gov.uk/government/uploads/system/u

#8/Water Framework Directive (Standards and Classification) Directions (England and Wales) 2015. Value of 2Ugly flor sum isomers split between 3 isomers.
#9-Water Framework Directive (Standards and Classification) Directions (England and Wales) 2015. Dissolved Fraction. If DOC > Impl then a higher criteria may be applied, however this value has been adopted as an initial screening value.
#10:Water Framework Directive (Standards and Classification) Directions (England and Wales) 2015. Dissolved Fraction. MAC adopted in absence of AA value.
#11:Operational Targets and EQS. EA, April 2018.
#12:Operational Targets and EQS. EA, April 2018. Dissolved plus ambient background concentration. For saltwater, an Ambient Background Concentration of 1.1 µg/l has been used as an initial screening value.
#13: European Chemicals Agency, REACH database, accessed 3 September 2021 (https://www.echa.europa.eu/information-on-chemicals/registered-substances).
#14: Value for phenols adopted in the absence of a value for monohydric phenols.

Table 2: Water	Redcar South Bank Resources Site Specific As	sessment Criteria
Compound	Theoretical Solubility (µg/l)	Water Resources Site Specific Assessment Criteria (µg/l) - with dilution
Speciated Total Petroleum	Hydrocarbons and Fuel	Indicators
>C5-C6 Aliphatics	36,000	1,360
>C6-C8 Aliphatics	5,400	1,360
C8-C10 Aliphatics	430	>SOL
C10-C12 Aliphatics	34	>SOL
C12-C16 Aliphatics	0.76	>SOL
C16-C35 Aliphatics	1.30E-03	>SOL
C21-C35 Aliphatics	1.30E-03	>30L
>EC8-EC10 Aromatics	65,000	1,360
>EC10-EC12 Aromatics	25,000	1,360
>EC12-EC16 Aromatics	5,800	1,360
EC16-EC21 Aromatics	510	>SOL
EC21-EC35 Aromatics	6.6	>SOL
Benzene	1.78E+06	2,400
Foluene	5.90E+05	22.200
Ethylbenzene	1.80E+05	5,990
Kylene Total	1.91E+05	8,990
Polycyclic Aromatic Hydro	1 11	-,
Naphthalene	19,000	599
Fluoranthene	230	1.89
Anthracene	70	30
Benzo(a)pyrene	3.8	0.0509
Metals	3.0	0.0309
Arsenic	1.25E+09	7,490
Boron	6.35E+07	2,100,000
Cadmium	1.62E+09	59.9
Chromium (hexavalent)	8.76E+08	180
Fotal Chromium	8.76E+08	180
Copper	1.38E+08	1,130
ron	1.00E+09**	300,000
_ead	2.96E+08	390
Mercury	7.40E+07	21
Nickel	2.50E+09	2,580
/anadium	2.11E+08	30,000
Zinc	4.32E+09	2,370
Volatile and Semi Volatile C		
1,2-dichloroethane	8.68E+06	3,000
1,2-dichloropropane	2.80E+06	2,400
Chloroform	8.95E+06	749
Aniline	3.50E+07	360
Bis(2-ethylhexyl) phthalate	3.00E+02	>SOL
Phenol	8.41E+07	2,310
Phenols Monohydric	8.41E+07	2,310
Other Inorganics		
Cyanide Total	1.00E+09**	300
Thiocyanate (as SCN)	1.00E+09**	2,700
Ammoniacal Nitrogen as N	1.00E+09**	6,290

Notes

Includes contaminants of concern identified following screening undertaken in Table 1.

Theoretical solubility assumed to be 1 x $10^9 \mu \text{g/l}$ in the absence of a readily available solubility limits

>SOL Results of risk assessment demonstrate pathway does not

present significant level of risk.



	Units MDL Adopted Resources		Units MDL Ado	Water Adopted Resou		South Bank Area A BH-2010		BH-201			描	BH-2013		BH-201	2014		<u> </u>	BH-2015			BH-2016		BH-201			
			Installatior Sall ple DateDat			12/2021 09/03/1			72021 09/0		021							5/02/2021 0			//02/2021 08	/03/2021 03/0		12/2021 08/1		03/08/202
	Fotal Petroleum Hydroca	2	100	ŀ	ŀ	ŀ	ŀ	ŀ	Г	Ŀ	<0.1 <0.1	100	ŀ			\$ 0,	¢0.1	¢0.1	100	×0.1	0 1	ŀ	ŀ	×0.1	100	0.0
	>C6-C8 Aliphatics) Drl				H				0.1	¢0.1	¢0.1		T	+	¢0.1	¢0.1	¢0.1	-0.1	¢0.1	¢0.1			<0.1	0.1	0.
No. 1964 No. 1964	>C8-C10 Aliphatics	/Brl		^		+		+	Ħ	-0.1	<0.1	<0.1	\dashv	П	-	<0.1	<0.1	<0.1	¢0.1	<0.1	-0.1		\dashv	<0.1	-0.1	0.1
	>C10-C12 Aliphatics	'n	,	1		+	+	+	\dagger	+	1 0	~ \	+	T	\rightarrow	5 5	2 c	V 7	₹ 7	δ.	~ \	+	+	- √ 7	~ 7	ψ. C. 0
	>C16-C35 Alinhatics	2 2	-	\ 		+	+	+	+	+	2 .	7 0	+	Ť	$\overline{}$	40		, 0	, 0	p 1	7 0		+	7 0	7 0	9
	>EC8-EC10 Aromatics	P P	т			+	+	+	Ť	+	0.4	\$ 0°.1	+	T	_	, Ç	0.1	\$ 0°.1	0.1	0.0	\$ 0°.1	ł	+	² 0.1	20.1	0
	>EC10-EC12 Aromatics		т						t	+	₹	₩	+	T	_	₹	₹	₹	₩	5.2	₩			₹	V	ဖ
No. No.	>EC12-EC16 Aromatics	I	-	ŀ	H		-		t	+	\ \		ł	T	_	₹	₹	V	₹	22	· \		+	\ \	V	3.6
	>EC16-EC21 Aromatics	Γ		ľ					$^{+}$	+	17	. 2	ł	Ť	+	. 2	. 2	. 2	. ₽	15	. 2		+	. 2		1,5
	>FC21-FC35 Aromatics			\ 		+			t	+	- 6	- \	+	T	$\overline{}$	7	, v	7 0	, v	2 2	7		+	- - -	7 5	2 2
	Benzene					+	+	+	$^{+}$	+	2 7		+	Ť	_		₹	-		- -	₹	+	+	- V		2 ₹
	Toluene)DI	-		200			+	t	+	V			T	_		₹	₹		₹	₹		H	V		∀
Mail	Ethylbenzene	P P	-		066					+	- ▽				\top		⊽	√		. △	· ∇		<u> </u>	· ∇		. ₽
	Xylene Total) gr			066	_	+	H	+	-		-	-	t	†			8			2	H	H	65		١.
1 1 1 1 1 1 1 1 1 1	a	1 5	s	l																		۱	۱			
1				ŀ	Н	H	H	H	Г	-	H	0.07	ŀ	Г	7 0.11	0.12	4.2	0.83	0.54	-	0.1	H	H	H	:0.05	90.0
1	Fluoranthene	bri	0.01							<0.01		0.02			1 0.01	0.03	<0.1	0.04	0.05	<0.1	0.01				0.02	0.01
1 1 1 1 1 1 1 1 1 1	Anthracene)Br	0.01			L		L		<0.01	_	<0.01	L		10.0> 10	<0.01	<0.1	<0.01	0.04	<0.1	<0.01		L	L	10.0	0.0
No. Color Color	Benzo(a)pyrene	'n	0.01			Н	Н	Н	П	<0.01	Н	<0.01			10.01	<0.01	0.1	<0.01	<0.01	<0.1	<0.01	Н	Н	Н	10.01	<0.01
10 10 10 10 10 10 10 10	Metals																									
1	Arsenic	'nď		_	490				H	\vdash				П	Ц											
Mail	Arsenic (Filtered)	hg		_	490				T	+	2.3	2.8		\forall	m m	1.6	1.7	2,5	9.	5.1	2.1	2	1.3	2	2,4	1.7
1	Boron	gr	П	7000 210	0000	+	+	+	T		+		+	T								+	+	+		
1	Boron (Filtered)	Ďď.		7		+	+	+	T	3,100	+	2,000	+	T	005,1	001,1	1,300	1,600	001,1	1,500	3,500	+	+	+	005,	2,400
Mail	Cadmium (Filtered)	Ďď.		ł		+	+	+	Ť	-	+	. 6	+	T		- 60	. 6	- 6	. 6	- 6	- 6	+	+	+	- 6	۱ او
1	Chromium (hexavalent)	2 2		H		+	+	+	T	-	H	20.02	+	T		20.0	3.7	20.5	20.0	2.0	20.5	+		+	20.0	3 2
1	Chromium	91		H	80	+	+	+	t	+	t		+	T		;	; ,	; .	; .	; ,	; ,	+	+	+	; ,	; ·
1	Chromium (Filtered)) DII		H	80										+											-
	Copper) Br		H	130	L	<u> </u>	L					H	t	+											١.
14 15 15 10 10 10 10 10 10	Copper (Filtered)	hgi				Н	Н		Н	Н	Н	1.2	Н	Н	Н	4·0>	×0.4	<0.4	×0.4	<0.4	0.8	0.7	1.1	-	9.0	<0.4
14 15 15 15 15 15 15 15	Iron	рд	- 1	<u>۳</u>	0000					•	+		+	+									-		,	
1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1, 1,	Iron (Filtered)	/Brl		<u>۳</u>	0000	1	- 2	10			230		+	+	+		9.2			210		+	+			6.0
Mail	Lead (Filtered)	ěď.	- 1	ł		+	+	+	†	+	, ,	. 0	+		-	- 62	. 6	- 6	- 50	- 0	, 60	+	+	' 5	- 20	,
1	Mercury	2 2		H		+	+	+	Ť	-	7.0	t .			-	2 '	8 '	-	5 .	90.0	77.	+	+	<u>+</u>	3 .	8 '
National Control Con	Mercury (Filtered)	DI O		ŀ		ł	+	+	Т		<0.01	¢0.01	+	Ť	+	<0.01	<0.01	90.0	0.04	0.02	<0.01	+	+	10.01	10.01	0.0
140 1 1 1 1 1 1 1 1 1	Nickel) Bri				H			Г				H	T	-							\vdash	-			١.
140 1	Nickel (Filtered)	'ngr			580						29	3.1		Г	-	<0.5	<0.5	9.0	<0.5	<0.5	8.0	9.0		2.5	1.1	6.0
140 130 130 130 140 140 141	Vanadium	рg	- 1			\dashv			+	\dashv			+	1	\dashv								\dashv			
14 13 17 18 18 18 18 18 18 18	Vanadium (Filtered)	Ďď.				+			\dagger	+		5.7	+	T	-	2.3	0.8	9.0	9.0	6.0	5.	1.8	+	1.7	8.	-
14 1 15 15 15 15 15 15	Zinc (Eilhered)	Ď,		ļ		+	+			+	300	- 17		Ť	-	. 2	. 5	. [. 2	. 2	5.2	7.2	+	. 0	, 5	۰ ۲
1	Volatile and Semi Volatile	1	Compounds	ł	ı	1	1	۱	ı	Н	200		ı	1	-	2	2.	17	2.	2:	di C	7: ,	ł	,	2	,
lorgotopane lg/L 1 8 2400 - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - < - </td <td>1,2-dichloroethane</td> <td>/Brl</td> <td>1</td> <td>ŀ</td> <td>000</td> <td>ŀ</td> <td>ŀ</td> <td>ŀ</td> <td>H</td> <td>H</td> <td>V</td> <td>ŀ</td> <td>ŀ</td> <td></td> <td>Ŀ</td> <td>ŀ</td> <td>⊽</td> <td>⊽</td> <td>ŀ</td> <td>₹</td> <td>⊽</td> <td>ŀ</td> <td>H</td> <td>₹</td> <td></td> <td>₹</td>	1,2-dichloroethane	/Brl	1	ŀ	000	ŀ	ŀ	ŀ	H	H	V	ŀ	ŀ		Ŀ	ŀ	⊽	⊽	ŀ	₹	⊽	ŀ	H	₹		₹
orm lgl. 1 2.5 749 - 41 41 42 <	1,2-dichloropropane	/Brl	L 1		400					H	7				H		7	₹		7	7			₹		₹
May L	Chloroform	/Brl							П	\vdash	2		Н	П	-		₹	√		2	⊽		Н	₽		7
19/1 10, 7.7 2510	Phenol	ρd							T	\vdash	-0.1	<0.1			-	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1			<0.1	<0.1	٥ <u>.</u>
1901 1.2 360 -	Phenols Monohydric) Pg		\downarrow	310	+	+	+	1	+				7	\rightarrow							+	+			
190 1 1.3 1.5	Aniline			+	160	+	+	+	+	+	⊽		-	+	•		₹ .	⊽		₹	⊽	+	√ .	√ .		⊽
mg/L 0.01 6.021 6.29 23 25 1.1 6.09 0.78 0.05 1.1 1.2 1.1 1.2 1.8 0.16 0.17 0.23 0.53 0.016 0.016 0.017 0.016 0.017 0.016 0.016 0.016 0.016 0.016 0.016 0.016 0.016 0.016 0.016 0.016 0.016 0.016 0.016 0.016 0.016 0.016 0.016 0.017 0.016 0.016 0.016 0.017 0.016 0.016 0.016 0.017 0.016 0.016 0.017 0.016 0.016 0.017 0.016 0.016 0.017 0.016 0.016 0.017 0.016 0.016 0.017 0.016 0.016 0.017 0.016 0.016 0.017 0.017 0.017 0.016 0.017 0.017 0.017 0.017 0.017 0.017 0.017 0.017 0.017 0.018 0.011 0.017 0.017 0.018 0.01	Bis(2-ethylhexyl) phthak	п	-		30	1	1	1	· -	•	3.8			<u>^</u>	•		₹	₹		₹	⊽	1	₹	₹		⊽
Ig/L 20 9 2700 -<	Ammoniacal Nitrogen as		0.015	ŀ	29			ŀ	r	0.78	0.63	1.1	r			г	0.53	0.11	г	0.32	0.16	r	L	0.55	H	0.52
Hg/L 20 9 2700 - - - - - - - - -	Cvanide Total		0,1	H	8	H	H		Ť	=	13	9.6	t	-		t	<40 5.4	83	t	<40 - 3.5	21	t	Ļ	33	t	40 25
	Thiocyanate (as SCN)	, bri			200	H	۲		H	ŀ	² 20		t	_		t	36		t	35		H	L		H	×20
	,	2				-					- ;			5	-								j			i

Not Analysed

Concentration exceeds EOS

Concentration exceeds SAC and EOS

Environmental Quality Standard
SSAC Environmental Quality Standard
SSAC Environmental Crieria
SAC Environmental Crieria
SAC Denotes shallow well installation

Denotes deeper well installation

Units MDL Adopted Resources	Units MDL	JL Adopted	Water	South Bank Area A BH-2019	Area A		BH-2020			BH-2021		B	H-2022		ā	H-2024			BH-2025		
Compound	Well Installa	Well Installation Saline EQS	SSAC (with						4				A								
ample DateDat Total Petroleum Hydrocarbons and Fuel Indicators	sample Date	Dat	dilution)		15/02/2021 08/03/2021	03/08/2021		08/03/2021	03/08/2021	15/02/2021 0	8/03/2021 0		5/02/2021 0	8/03/2021 03	03/08/2021 15	5/02/2021 08	3/03/2021 03		02/2021 08/0	3/2021 03/	3/08/20
>C5-C6 Aliphatics	µg/L 0.1	4.55	1360	<0.1	<0.1	<0.1	<0.1	¢0.1	<0.1	<0.1	<0.1	¢0.1	¢0.1	<0.1	<0.1	<0.1	<0.1	<0.1	Н	€0.1	0.0
>C6-C8 Aliphatics	hg/L 0.1	4.55	1360	60.4	0.0	0 6	0 6	0.0	0.0	0.6	0.4	0.0	0.0	1.00	0.4	0.0	0.4	0.4	0.4	0.7	÷
>Co-CIU Allphatics	Т	4.55	SOL	÷ 7	- V	7.0.	5 2	-0,	-0.0	- - -	- V	40.1		- V	70.		-0.	40.1	+		5 67
>C12-C16 Aliphatics	ua/L 1	4 55	>SOL		V	₹	7	√	8.7	7	7	18		7	4.8	7	V	15	H	· ⊽	1.100
>C16-C35 Aliphatics	ng/L	4.55	>SOL	\$	\$		2	\$	1	6	Ċ,		\$	\$	1	\$	Ċ,	1	-	\$	١
>EC8-EC10 Aromatics	µg/L 0.1	4.55	1360	<0.1	-0.1 1.0	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	¢0.1	¢0.1	<0.1	<0.1	<0.1	<0.1	<0.1		ذ0.1	5.8
>EC10-EC12 Aromatics	hg/L 1	4.55	1360	۲	⊽	5.1	7	₹	4.8	2	₹	8.3	<u>v</u>	۲	7.6	₹	V	13		220	330
>EC12-EC16 Aromatics	hg/L 1	4.55	1360	۲۷		9	7	۲	41	1	۲	13	7	۲۷	8.6	₹	۲	16		920	400
>EC16-EC21 Aromatics	hg/L 1	4.55	>SOL	۲	۲	12	۲	۲	14	7	₽	2.5	7		23	₹	7	2.2		56	20
>EC21-EC35 Aromatics	hg/L 1	4.55	>SOL	۲	⊽	2.9	7	۲	4.6	7	7	۲	7	۲۷	17	۲-	7	۲		<u>~</u>	92
Benzene	hg/L 1	80	2400	۲		₹	۲		۲,	7		۲			<u>~</u>	₹	7	<u>~</u>		61	130
Toluene	hg/L 1	74	22200	٧	•	₹	₹		۲	۲		₹	1	۲	₹	₽	₹	7		₹	⊽
Ethylbenzene	hg/L 1	50	2990	۲		7	7		۲	7		۲		7	₹	3	7	7	-		⊽
Xylene Total	hg/L	30	8990	ဗိ			8			8				7		7	\$3		-	2	•
Polycyclic Aromatic Hydrocarbons																					
Naphthalene			299	<0.05	0.07	0.07	<0.05	<0.05	0.57	<0.05	<0.05	0.19	0.05	<0.05	20.0	<0.05	<0.05		_	280	0.0 0.0
Fluoranthene		0	1.89	0.01	0.08	0.01	0.03	20.0	0.03	0.01	0.01	0.02	0.02	0.01	<0.01	<0.01	<0.01			7.47	0.29
Anthracene			30	0.02	<0.01	<0.01	0.02	0.02	80.0	<0.01	<0.01	0.02	0.02	<0.01	<0.01	<0.01	<0.01			2,2	2.4
Benzo(a)pyrene	µg/L 0.01	0.00017	0.0509	<0.01	0.02	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	×0.0
als																		ŀ	ŀ	ŀ	
Arsenic		25	7490										-	-				+			
Arsenic (Filtered)	\neg		7490	1.1	9.	1.4	1.6	1.6	1.2	17	2.3	4.	2.1	2.5	1,7	1.3	+	+	+	0.63	0.52
Boron	hg/L 12	000/	2100000	- 000	- 0	- 000	- 6	- 00	- 6	- 5	- 000	- 0	- 1	- 000	- 000	- 1	- 00,	+	+		,
Boron (Filtered)	Jg/L 12	+	700000	3,300	2,400	2,200	2,100	2,900	2,100	nne'i	1,300	2,100	1,400	005,1	006,1	004,1	20.1	+	+	040	8
Cadmium Cadmium (Eiternal)	Т	+	0.00	, 00	. 6	, 6	, 6	, 6	, 8	, 50	, 90	, 90	, 60	, 60	. 6	, ,	, 6	+	+	. 6	۱ ۱
Chromium (hexavalent)		2 0	180	20.07	20.00	20.07	20.5	20.0	20.5	20.5	27.5	200	20.0	20.07	10.0	20.02	20.00	20.0	20.0	200	3 2
Chromium	10/1 0.25	ļ	180									+		+	+	+		ł	H		٠
Chromium (Filtered)	Т	ļ	180							<u> </u>								+	H	ļ.	ŀ
Copper	Т	H	1130														-	H	H	-	ŀ
Copper (Filtered)	П		1130	6.0	1.6	1.3	8.0	<0.4	1.	2.3	1.8	1.9	2	1.7	1.8	<0.4	×0.4	<0.4	H	0.4	40,4
Iron	ug/L 5.5	1000	300000												-						١.
Iron (Filtered)	ug/L 5.5		300000			6.4			7.8			25			8.7			62	<u> </u>		45
Lead			390																		١.
Lead (Filtered)			390	0.16	0.45	0.47	¢0.0>	0.16	60.0>	0.45	0.53	0.2	0.3	0.48	0.18	<0.09	0.15	0.16	0.18	0.16	1.0
Mercury	µg/L 0.01		21																		١.
Mercury (Filtered)	П		21	<0.01	<0.01	<0.01	10.0	<0.01	<0.01	<0.01	<0.01	<0.01	0.02	<0.01	0.01	<0.01	<0.01	H	H	<0.01	<0.01
Nickel		8.6	2580	-		-		-				-		-							•
Nickel (Filtered)	µg/L 0.5		2580	9.0	2.1	1.3	<0.5	<0.5	9.0	2.8	1.7	1.6	2.3	1.3	1.2	<0.5	<0.5	8.0		<0.5	<0.5
Vanadium			30000			•		•											-		
Vanadium (Filtered)			30000	1.9	2.3	1.6	2.8	3.1	2.2	1.4	2.2	1.5	1.6	2.1	1.3	9.0>	6.0	9.0>	1.3	1.1	9.0>
Zinc	µg/L 1.3	7.9	2370			-	-	-	-	-	-	-	-	-	-	-	-		+	-	
Zinc (Filtered)	Jg/	١	2370	4.2	×1.3	4.1	1.6	41.3	۲- ۲.3	4.9	<1.3	5.5	7.4	4.3	1.6	4.1	۸ ۱ .3	11	1	7.3	ુ
atile and Semi Volatile Orç	100	sp																		ľ	
1,2-dichloroethane	hg/L 1	10	3000	₹		7	₹		7	7		7		√	√	7	₹	₹	4	n	V
1,2-dichloropropane	hg/L 1	ω	2400	₹		7	7		₹	7	•	⊽	'	12	7	₹	12	₹	₹	12	⊽
Chloroform	\neg	2.5	749	₹ .		₹ .	2		7	7		₹ .		2	7	₹	₹ .	₹ .	₹	₽	⊽
Phenol		4	2310	<0.1	×0.1	0.1	40.1	<u><0.1</u>	-0 <u>.</u> 1	0.1	40.1	0.1	40.1	<0.1	40.1	<u><0.1</u>	<0.1	<0.1	<0.1	1.0	0.21
Phenols Monohydric	hg/L 100	4	2310					-		-			-		-			-			
Aniline	hg/L 1	1.2	360	Ý		₹	₹		7	7		₹		₹	7	7	₹	₹	<u>~</u>	Ū	⊽
Bis(2-ethylhexyl) phthalate	hg/L 1	1.3	>SOL	₹		1.9	₽	-	1.5	7	-	₹	-	۲	2	₹	₹	7	7	₹	⊽
Other Inorganics		ı	00.0	000	07.0	05 0	2000		0	u v	0,00	0.47	000	0.70	17.0		30	000	ļ		5
Aminomida Total	11g/L 0.013	0.02	300	0.02 AR	40 0	000	20.05	23	0.30	2 00	64.9	7 7	11	10.73	1 0 7	32	2 2	Z40 = 7.4	7.1	2 02	2 2
yanide i otal	Hg/L	-	000	2	2	01 - 0+	22		10-04/	0.0	2	-		2	7	70			-	_	3 3
This contract of the CAN		c	2700			00.7		Ι	000			00,			00,	-	l	23			376

Notes

EQS
SSAC
S O D

Not Analysed Concentration exceeds EQS Concentration exceeds SQAC and EQS Environmental Quality Standard Environmental Quality Standard Site Specific Assessment Citiena Denotes shallow well installation Denotes deeper well installation

	Units MDL			South Bank A	rea A																
Compound	Adopted Mell Installation Saline EQS		Resources S	SBA_AUK_BH101 D	1101		<i>ত</i> ব	SBA_AUK_BH102 A	102	ις Ο	SBA_AUK_BH103 D	03						SBA_AUK_BH104 D	<_BH104		
ample DateDat	ample DateDat			08/10/2020 20/10/2020	020	12/11/2020 0	03/08/2021 0	08/10/2020 20	12/10/2020	/11/2020 08	3/10/2020 21			08/2021 08/1	0/2020 21/10/2	2020 11/11/	2020 03/08/2	02/1 08/10/20	20 20/10/2020		03/08/202
Trefforedin hydrocal	India ruei mar	4.55	1360	\$0.1	\$0.1	60.1	\$0.1	\$0.1 	×0.1	\$0.1 1	\$0.1	\$0.1 1	\$0.1 1	ŀ	ŀ	H	ŀ	ŀ	40 4	\$0.7 1.0 1.0 1.0 1.0 1.0 1.0 1.0 1.0 1.0 1.0	\$ 0 T
>C6-C8 Aliphatics	µg/L 0.1	4.55	1360	8.8	c 0.1	0.1	¢0.1	¢0.1	-0°	¢0.1	250	620	300	⊽	140 120		130 <0.1	0.0	-0°	1,400	¢0.1
>C8-C10 Aliphatics	µg/L 0.1	4.55	>SOL	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	2.6	<0.1	<0.1						<0.1	06	<0.1
>C10 C12 Aliphatics	hg/L 1	4.55	>SOL	V	9	₹	7	<u>~</u>	₹	⊽	₹	₹	₹			+			₹	⊽	⊽
>C12-C16 Aliphatics	µg/L 1	4.55	>SOL	₽ (45	₽ (7	∀ 3	24	₽	⊽	₽ (₽ (+	1	+	√ (₽ (7
>C16-C35 Aliphatics		4.55	>SOL	5 5	218	0 5	1 0	6	155	7 5	34	7	۶ ۲۰	+	+	+	+	+	7 5	7 3	. 6
>EC8-EC10 Aromatics	µg/L 0.1	4.55	1360	V.0.1	0.0	0.1	0,1	1.00	1.00	, ,	1.0	v0.1	\$0.1	+	+	+			, 0.1	VO.1	0.7
>EC10-EC12 Aromatics		4.55	1350	7	5	7	7	7	7	- -	7	7	17 00	+	+	+			7	7	7
>EC16 EC21 Aromotics		7 7 7	200	7 7	21	7 7	7 7	7 7	7 7	7 7	7 7	7 7	5 7	+	+	+			7 7	7 7	7 7
>FC21-FC35 Aromatics		4.00	NOC.	7 7	7,0	7 \	7 7	7 7	7 5	7 \	7 7	7 7	7 5	+	+	+		+	7 7	7 2	7 7
Renzene		α	2400	, ,	1 7	7 \	7 5	7 5	7 7	7 5	410	470	270	+	+	+	+	+	7 5	1 400	7 5
Tolliene	10/1	74	22200	2 ~	V	\ \	7	7	7	. ₽	4	4	- T	H	H	H	H	+	₹	4	₹
Ethylbenzene	na/L 1	20	5990	\ \	₹	7	7	7	2	₽	- ∇	- ▽		<u> </u>	<u> </u>	+		<u> </u>	₹	· 6	⊽
Xylene Total	- J/6rl	30	8990	٧ 8	8	60		60	٧ د	8	80	4	9	H	H	\vdash	H	H	8	152	
cyclic Aromatic Hydrocal	Titre:													۱	۱	۱					
		2	599	4 - 300	<1-0.12	8-9	0.11	<1-12	<1-1.6	<1 - 0.25	<1-24 <	H	H	H	5.2 - 100 94 -	ŀ	L	-1.1	H	1.1 - 100	<0.05
Fluoranthene	1	0.0063	1.89	<1 - 0.04	0.02	0.02	H	<1 - 0.01	H	\vdash	\vdash	L		r	L	H	L		Н	0.04	<0.01
Anthracene		0.1	30	<1 - 0.04	0.02	0.02	<0.01	<0.01	0.01	H	\vdash	L		<0.1	L	\vdash	√	H	\vdash	0.05	<0.01
Benzo(a)pyrene	µg/L 0.01	0.00017	0.0509	<0.01	<0.01	<0.01		<0.01	<0.01	<0.01	<0.01	<0.01	0.1		<0.01 <0.01		<0.01	<0.01	<0.01	<0.01	<0.01
S																					
Arsenic	µg/L 0.16	25	7490	2.7	2.6	2.3	-	0.48	0.32	0.56	1.7	1.5	+	+	-	-	1.5	+	1.4	1.2	
Arsenic (Filtered)	µg/L 0.16	25	7490	- 3		- 6	1.7	- 00	- 5		- 00	- 6	- 0	+	- 6	1	- 1.7	- 3	. 5	. 6	0.62
Boron (Eiltorod)	12 J.g/l	0007	2100000	340	014	065	- 020	000,1	004,1	006,1	078	+	+	+	+	+	+	+	+	ngc	- 00
Cadmirm	\top	200	200000	- 00	- 00	-0.03	000	- 00	-0.03	- 000	- 000	- 000	-0.03	+	-0.03	+		- 00	- 000	- 000	9 '
Cadmium (Filtered)	10/1	0.0	59.9	3 '	3 '	200	<0.03	t .	200	3 .	200	+	+	<0.03	+	+	-0 03	+	+	2 '	°0 03
Chromium (hexavalent)	l J/bri	0.6	180	- Z>	<u></u>	<7>	- Z>	<7>	<7>	- 2>	<7>	╁	7>	╁	+	╁	7> 7>	+	\frac{1}{2}	<i>L></i>	1 2
Chromium		9.0	180	6.4	<0.25	<0.25	1.4	0.3	<0.25	<0.25	<0.25	+			\vdash		\vdash		0.26	0.45	1.3
Chromium (Filtered)	П	9.0	180										H	H		\vdash	\vdash				
Copper	µg/L 0.4	3.76	1130	5.6	9.0	0.5		8.0	9.0	<0.4	<0.4	0.7					<0.4		-	2.1	
Copper (Filtered)		3.76	1130				0.7	-					\dashv	\dashv	\dashv	\dashv	\exists	-	•		0.7
Iron	µg/L 5.5	1000	300000	38	28	47	1 8	100	240	2,000	39	21	22	+	+	+	180	+	4	96	. 3
Iron (Filtered)	µg/L 5.5	1000	300000			- 8	93		- 8	. 0		- 8	+	+	+	-		+	, 8	- 8	66
Lead	- 1	2.	390	4.1	60.05	60.09	- 0	4.4	60.09	60.05	4	60.09	+	+	+	+	+	+	60.05	80.09	, ,
Lead (Fillered)		1.3	390	33.0	- 0	. 070	60.05	, 6	. 6	. 6	, 6	, 5	+	+	. 0	. 0	+	+	, 6	. 5	91.0
Mercury (Filtered)		0.00	21	2	÷	0	- 0	20.0	000	5.	0.02	0.0/		+	+	+	.00	+	200	5.	. 00
Nickel	10/1	98	2580	14	14	12	2	12		- 6	90	0.7	+	+	0.5	+	<0.5		12	. 13	2
Nickel (Filtered)	т	986	2580	:		!	2.7	! .	-	2 .	3 '	;	t	+	+	+	- 05	+	! .	2 .	9
Vanadium		100	30000	4.1		1.	j '	9.0	١.		0.8		+		-			2.2			2 .
Vanadium (Filtered)		100	30000										\vdash	H							
Zinc	µg/L 1.3	7.9	2370	1.9	31	2.9		3.2	61	1,4	1.5	13	2.2		<1.3 7.7		7.3		61	<1.3	
Zinc (Filtered)	µg/L 1.3		2370	,			9.9						-	8.4							13
le and Semi Volatile	Volatile and Semi Volatile Organic Compounds																				
1,2-dichloroethane	µg/L 1	10	3000	۲	۲	-1	1	7	۲۷	۲ <u>۰</u>	22	۲-	26		_				۲ <u>۰</u>	82	٧,
,2-dichloropropane	µg/L 1	80	2400	۲	۲	7	7	۲	-1>	-1	7	7	-1	-1	<1 <1		۲	7	7	۲	7
Chloroform		2.5	749	7	7	7	7	₹	₹	7	7	۲	₹						₹	₹	7
Phenol	µg/L 0.1	7.7	2310	1.2			3.7		,		2.7		-		\dashv	-	-	+			0.
Phenols Monohydric	hg/L 100	7.7	2310	220	<100	320		410	290	1,100	<100	<100	350		\dashv	+	<100	+	<100	<100	
Aniline		1.2	360	₹		,	2	₹	-	-	17	-	-					-	-	-	₹
Bis(2-ethylhexyl) phthalate	ate µg/L 1	1.3	>SOL	۲		-	7	7		-	۲	-	-								7
Other Inorganics																		ı			
Ammoniacal Nitrogen as N		0.021	6.29	2.3	2.6	5,	2.3	3.9	2.7	1.2	20	8 2	S 2	220	43 47	ł	45	0.92	0.68	0.13	0.18
Cyanide Lotal	Hg/L	- 0	300	240 20	×40	×40	×40	240	440	440	c40	70	60		-				×40	×40	440
ocyanate (as SCIN)							•			000	4.10		ç							ç	ć

	Not Analysed	Concentration exceeds EQS	Concentration exceeds SSAC and EQS	Environmental Quality Standard	Site Specific Assessment Criteria	Denotes shallow well installation	Denotes deeper well installation	
		xxx	xxx					
Notes				EQS	SSAC	S	۵	

The continue of the continue	The control	alia oogo																					
	Particular Par	Compound	Units MDL			South Bank A SBA_AUK_B	rea A H105		SBA_AUK_BH	106		SB/	AUK BH107				JK_BH108			SBA_AUK_BH1			
Part			ample DateDa	3	dilution)	08/10/2020	20/10/2020	11/11/2020 0	9/10/2020 2	/10/2020			0/2020 21/10	/2020 10/11/2	2020 03/08/2		20/11/10/202	0 10/11/2020	03/08/2021		0/10/2020 10	10/11/2020	03/08/202
Marie Mari	The content	Petroleum Hydrocarbo	ns and Fuel Inc	dicators	4200	ç	,		,		Ç		7		,		Ć	ć,	70,	Ć	, ,		č
The content of the		A-CO Aliphatics		4.55	1360	530		- 6	- 5	- 6	100	+		+		+	+	5	5 6	640			1 6
Harmonia	The continue The	8-C10 Aliphatics		4.55	>SOL	72	0.0	<0.1	0.1	0.1	×0.1					+	<u> </u>	0.1	<0.1	2	410	490	=
Particular Par	Mathematic Mat	10-C12 Aliphatics		4.55	>SOL	V	V	₹	7	7	₹		H			ŀ	ŀ	7	28	√	⊽	⊽	۲
Thing the series of the series	Marche M	:12-C16 Aliphatics	hg/L 1	4.55	>SOL	⊽	₹	⊽	⊽	7	2	H	-	L	L	H	H	2	2.9	₹	₹	₹	7
No. 1	Maintain M	:16-C35 Aliphatics	hg/L	4.55	>SOL	26	7	\$	2	\$	\$							\$		7	\$	\$	•
No.	Part	C8-EC10 Aromatics		4.55	1360	<0.1	<0.1	<0.1	0.1	<0.1	*0.1							<0.1	<0.1	<0.1	<0.1	<0.1	1,1
No.	No. 10, 10, 11, 11, 12, 12, 12, 12, 12, 12, 12, 12	C10-EC12 Aromatics	hg/L 1	4.55	1360	870	7	1,000	7	7	<u>۲</u>							₹	15	2,300	7	5,800	8,900
Proposition	Principle Prin	C12-EC16 Aromatics	hg/L 1	4.55	1360	920	۲	1,600	₹	7	۲	_						₹	ω	340	₹	1,200	1,60
No. 1985	Mathematic Mat	C16-EC21 Aromatics	µg/L 1	4.55	>SOL	3.5	۲	13	₹	۲-	۲							₹	₹	45	₹	210	28(
1	1	C21-EC35 Aromatics	µg/L 1	4.55	>SOL	1,4	۲	₹	1	۲	۲.							۲	۲	₹	<u>.</u>	3.5	23
Part	Mail 1 7 7 2 2 2 2 2	zene	hg/L 1	80	2400	330	₹	₹	4	2	V						-	12	₹	47,000	24,000	31,000	37,0
No. 10, 10, 11, 11, 11, 11, 11, 11, 11, 11,	Main	nene	µg/L 1	74	22200	45	7		-	۲۷	₹		_					-	۲	4,500	2,600	3,300	4,40
Maintain	No. No.	ylbenzene	hg/L 1	20	2990		7	7	7	7	۲- ۲-	_	_	_	_	-	_	۲	₹	7	7	37	42
No. 11 No	No. 10, 10, 10, 10, 10, 10, 10, 10, 10, 10,	ene Total		30	8990	94	က	ç	ő	8	83		-	-	4	8	\exists	Ÿ		890	468	920	٠
Mail 10.05 2. 2. 2. 2. 2. 2. 2. 2	Mail	yclic Aromatic Hydroca	ы																				
Part	No. 1, 10, 10, 10, 10, 10, 10, 10, 10, 10,	ohthalene		2	599	<1 - 1,900	<1 - 0.85		<1-0.13	<0.05	<0.05			\dashv				<1-9	3.1	1,500 - 9,200	<2-7,500 6	100 - 11,000	7,9
Mail		oranthene		0.0063	1.89	<10-0.2	0.47		<1-0.08	0.02	0.02		4	\dashv	4			<0.01	0.14	<100 - 260	2.2 - 11	25	15
Maria Mari		hracene	- 1	0.1	30	<10-1.1	2		<1 - 0.07	0.04	0.04		4	+			4	0.01	<0.1	<100 - 52	4-13	45	-
Martin M	14 1 1 1 1 1 1 1 1 1	zo(a)pyrene		0.00017	0.0509	<0.01	0.03	<0.01	<0.01	<0.01	<0.01	П	4	Н	4	┪	4	<0.01	<0.1	<100 - 100	<2-1.5	2.2	4
Figure F	Heath Heat		-		007	,	100		100	Į.	0.03		ŀ	ŀ	ŀ	ŀ	ŀ			ļ	0	11	
Heater 1911 1912 1912 1913		ellic	- 1	67	7490	2	40.0	200	68.0	+	/0.0/		+	+	+	+	+	7	. (-	0.0	ò	,
Part 2	Physical P	enic (riltered)		2000	7490			. 5	' 0	- 620	- 000	7	+	+	+	+	+		7.0	. 00	- 000	- 000	3
Markelloon Mar	Marke Mark	on (Eithorod)	\top	0007	2100000	250	2	71.	000	0/0	000	$^{+}$	+	+	+	+	+	002,1	1 800	000	020	020	. 00
	Part	dir (i litered.)	т	200	59 9	100	20.03	- CO 03	<0.03	20.03	20 03	+	+	+	t	+	+	- 000	20.	60.0	900	- 0 U3	3 '
Part	Handersolven Hand	dmium (Filtered)	т	0.2	59.9							+	+	+	+	+	+		<0.03				<0.03
Harter H	Harter H	omium (hexavalent)	П	9.0	180	Z>	7>	2 >	- 2>	- 2>	7>	<7>				H		L >	<7	170	- 2	/>	28
Harter H	Harter H	omium		9.0	180	6.2	0.38	<0.25	<0.25	0.25	<0.25	0.26						0.45	<0.25	0.3	0.44	2	10
High 1	Hand	omium (Filtered)	П	9.0	180	,			-	-		1	+	+	+	\dashv	\dashv						
Hander H	Heare Hear	per	т	3.76	1130	6.4	4.4	-1	×0.4	8.0	×0.4	+	+	+	+	+	+	4.0°		40.4	<0.4 4.0	<0.4	
1911 15.5 1000 2000000 45 150 1500 52.0 170 250 2.50 170 250 2.50		oper (Filtered)		3.76	1130	, ,			-	-	- 8	4.0>	+	+	+	+	+		×0.4			-	4.0°
Part 100	Here	(Cilhorod)		1000	300000	46	160	0.00	730	2/2	760	- 090	+	+	+	+	+	089	- 000	014	480	1,200	- 000 6
Harter H	Hand	(Fillered)		12	200	- 7	. 00	- 00		- 00	. 00	067		+				. 5	027		. 5	- 0 74	0,0
Figure 1,01		d (Filtered)		5 6	390	7.	3	6	,	200	8 '	+		+	+	+		;	60 0>		-		0.41
Here of the color Leg of the	Here of color Leg	id (i mored)	т	0.07	21	0.01	<0.01	<0.01	<0.01	<0.01	<0.01	+	+	ł		+	+	0.02	2	0.05	0.02	0.07	'
1974 0.5 8.6 2.580 5.9 2.4 0.7 0.8 1 0.6 1 1.7 0.7 0.8 2.5 4.05 0.8	1974 0.5 8.6 2.580 5.9 2.4 0.7 0.8 1 0.6 - 1 1.7 0.7 - 2 0.8 2.5 0.5 1964 0.5 8.6 2.580 2.5 2.4 0.7 0.8 1.0 0.6 - 1 1.7 0.7 - 2 0.5 0.5 1964 0.5 8.6 2.580 2.5 2.5 2.7 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5 1964 0.5 1000 30000 0.2 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5 1964 1.3 7.9 2.270 2.2 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5 1964 1.3 7.9 2.270 2.1 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5 2.5 1964 1.3 7.9 2.270 2.1 2.5 2.5 2.5 2.5 2.5 2.5 2.5 1964 1.3 7.9 2.270 2.1 2.5 2.5 2.5 2.5 2.5 2.5 2.5 1964 1.3 2.5 2.40 2.1 2.1 2.5 2.40 2.1	cury (Filtered)	т	0.07	21					-	-	+	+	H	H	╁	-	-	<0.01				0.02
High High Like Sign	High High Ligh	kel		8.6	2580	5.9	2.4	0.7	9.0	-	9.0							<0.5		9.9	4.3	2.3	ľ
Filtered 1,05 1,00 3,0000 0.8 - - - - -	High Light Light	kel (Filtered)		8.6	2580				-		-	-							1.2				8.8
Higher High Light Ligh	Filtered 13	nadium		100	30000	8.0		•	0.7	•	-	•	+	+	<u>'</u>	40.k	+			1.4			1
High 1.3 7.5	Head	nadium (Filtered)		100	30000		. 5		' 6		' '					+				- 4			1
Semi Volatile Organic Composites (3) (3) (4) (4) (4) (4) (4) (4) (4) (4) (4) (4	Optional State Option Components 1,5 7,5 2,10 1,5 7,5 2,10 1,5 7,5 2,10 1,5 7,5 2,10 1,5 7,5 2,10 1,5 2,10 1,5 2,10 1,5 2,10 1,5 1,5 2,10 1,5		т	6.7	2370	3.3	43	77	2.8	40	7. V	1 0	+		+	+	_	7		01	46	3.5	'
Particle	Part Note Part	c (Filtered)			23/0			•				6.4			.7	'			2.5				
1	1	dichloroethane	5		3000	21	٧	V	V	V	V	ŀ	ŀ	ŀ	H	ŀ	ŀ	7	٧	Ž	V	V	V
1901 1 2.5 749 51 51 5210 510	ight of the section of the s	-dichloropropane	ua/L 1	2 &	2400	₹	₹	V	7		₹	+	<u> </u>			+	<u> </u>	7	√	₹	₹	₹	\
lg/L 0.1 7.7 2340 <10 - <1 - <1 - <1 - <1 1.300 - <0.69 <1 - <0.10 1.300 - 1.300 - - <0.10 -	light 0.1 7.7 2310 <10 - <1 - <1 - <1 - <1 - <1 - <1 0.20 <1 - <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10 <10	loroform	µg/L 1	2.5	749	۲	₹	26	2	2	7	H	L		-	H	L	10	⊽	7	₹	₹	
bigNL 100 7.7 2310 230 4100 4	Newly pithlibiting lags. 13/L (100 7.7) 2330 (100 110 6.100) 110 (100 110 6.100) 6100 (100 6.100) 6100	enol		7.7	2310	<10			۲										<0.1	1,300	\$		4,00
1901 1.2 366 20 -	typyL 1 12 360 20 - <1 - <1 21 - 19 <1 -	enols Monohydric		7.7	2310	230	<100	110	<100	<100	<100							<100		16,000	14,000	14,000	•
heavy pithhalate lg/L 1 33 >SOL <10 - <1 - <1 <1 - <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1	text()) phthalate Lg/L 1	line	hg/L 1	1.2	360	20		•	7	-	-		2.1		. 13			•	7	<100	<2		130
Interest Mov. Colfs Colf	Indicates Solution (s) Co.021 6.29 550 91 160 1.3 2.2 1.2 1.2 0.3 0.75 1.3 2.3 1.4 2.9 80 1.0 1.0 1.0 1.0 1.0 1.0 1.0 1.0 1.0 2.0 1.0 1.0 1.0 2.0 2.0 2.0 4.0	(2-ethylhexyl) phthalate	µg/L 1	1.3	>SOL	<10	•	-	₽		-	H	₽	 - -	\vec{v}	Н	-		۲	<100	<2		10
	10 1 1 10 10 10 10 10	Inorganics	0.00		00.0	0.00	3	200		,			H	H	H	ŀ	ŀ	c				00	ì
	13 14 15 15 15 15 15 15 15	monacal Ninogen as in	Ing/L 0.013		300	067 08	300	190	290	350	2 00	120	+	+	+		+	2.3 240	4 040	570	77	040	2 S
Ind/L 20 9 2700 1.100 290 <20 <20 <20 80 21 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20 <20		cvanate (as SCN)	ua/L 20		2700	1,100	290	<20	<20	<20	<20	80		+	-		+	<20	<20	2.500	2.300	<20	3 8
Netvo		2100																					

	Not Analysed	Concentration exceeds EQS	Concentration exceeds SSAC and EQS	Environmental Quality Standard	Site Specific Assessment Criteria	Denotes shallow well installation	Denotes deeper well installation	
		XX.X	X.X					
Notes				EQS	SSAC	S	۵	

Redcar South Bank Table 3: Comparison of Measu and SSAC	South Bank Comparison of Measured Groundwater Concentrations with EQS .C	ations with EQS																					
Compound	Units MDL Adopted Well Installatior Saline EQS ample DateDat	Water Resources SS SSAC (with dilution)	South Bank Area B BH-2001 A 16/02/2021 09/03/	k Area B 09/03/2021	rea B 09/03/2021 03/08/2021	BH-2004 A 16/02/2021 09/03/2021	09/03/2021	03/08/2021	BH-2006 A 16/02/2021 09	2021 09/03/2021 03/	BH A 03/08/2021 16/	BH-2009 A 16/02/2021 09/03/2021 03/08/2021	3/2021 03/08		AUK_BH101 2021 27/07/	SBB_AUK_BH101 D 12/07/2021 27/07/2021 29/07/2021	SBB_AUI D 21 12/07/203	SBB_AUK_BH102 D 1 12/07/2021 27/07/2021	29/07/2021	S 12/07/2021	27/07/2021	S S D D D D D D D D D D D D D D D D D D	South Bank , SBB_AUK_E D 14/07/2021
Total Petroleum Hydrocarbol	ns and Fuel Indicato	1360	<0.1 <0.		<0.1	<0.1	<0.1 <0.1		<0.1	<0.1		<0.1	^0.1		0.1	1 <0.1	^0.1	<0.1	0.1	<0.1	<0.1		6.1
>C6-C8 Aliphatics	μg/L 0.1 4.55	1360	<0.1 <0.1	0 -	0.0	c0.1	<0.1 0.1	-0°1	¢0.1	c0.1	c0.1	<0.1	×0.1	<0.1	<0.1	1.00	0.0	¢0.1	¢0.1	0, 1,0	0.1	0.1	¢0.1
>C8-C10 Aliphatics	1.0	NSOL NSOL	-	4	0.7	0.1 V	+	1	5.0	0.7	.0°.1	+	+	+	+		+	0, 2	0 7	0.1 0.1	0.7	.0°.1	£.0.2
>C12-C16 Aliphatics		(X	-	\perp	2	\[\nabla \]	+	1	7 \	_\v_	- - -	+	+	+	+	+	+	7 \	7 5	√	, ₽	, ₽	, v
>C16-C35 Aliphatics			-	Ш		42	\vdash	Ш	\$	\$													
>EC8-EC10 Aromatics	17.		\rightarrow	4	÷.	°0.1	\rightarrow	4	6.0	-0.	°0.1	+		+	+		+	60.	6.	Ç.,	0,1	°0.1	Ç. ,
>EC10-EC12 Aromatics		1360	⊽ ∇ ⊽ ∇	\downarrow	v v	V	⊽ ⊽ ⊽	1	v	V V	v v	+		1.5	21		+	v v	v	⊽	V	v v	v v
>EC16-EC21 Aromatics		ľ	+	L	₹	∇	+		₹	₹	√	+		H	+			⊽	⊽	⊽	∇	⊽	7
>EC21-EC35 Aromatics	-		Н	Н	₹	⊽	Н	Ц	2	7	₹						Н	₹	۲	₹	۲۷	₹	7
Benzene			+	\perp	<u>~</u>	√	-	₹.			⊽ .		+	+	+		+	₹.	₹ .	√ .	√ .	√ .	₽.
Toluene		22200	⊽ 7 ⊽ 7	4	7	₹ ₹	•	⊽ ₹			⊽ 7		+	+	+	+	+	7	7	7	⊽ ₹	₹ 7	7
Xylene Total	Hg/L 30	0668	+	- E	, .	7 8		7			 	+		+	+	+	+	, .	, .	<u>,</u>	7 .	, .	7 .
Polycyclic Aromatic Hydroca	rbons																						
Naphthalene	hg/L 0.05		0.27	Ш	90'0		1.1		1.9	1.9	Н	Н	Н	Н	Н	Н	Н	<0.05	0.56	0.24	0.14	90.0	<0.05
Fluoranthene	µg/L 0.01 0.0063	1.89	0.03 0.02	0.04	0.01	0.04	0.05 0.08	0.02	0.03	0.04	0.03	0.04	0.05 0	0.03 0.	0.19 <0.01	0.03	0.03	\$0 <u>.</u> 07	0.01	0.02	0.02	0.02	<0.01
Anthracene	0.01	+	70.07		0.02	0.06	0.06		40.0	40.0	+	+	+	+	+	+	+	0.00	0.00	0.02	0.03	0.07	0.00
Metals	0.0		20.07		0.0	10:05	10.02		10.0	10:02	1	1	1	۱	ı	1	1	0.0	0.0	0.00	10.0	10.0	0.07
Arsenic	0.16	7490	Н	Ц	 - -		Н	[-	-		-	H	H	H	H	H		 -	ŀ			
Arsenic (Filtered)	0.16	7490	2.4 2.8	3.9	2	2,1	16 15	2.3	3.1	2.7	1,3	2.2	Н	2.5	4.2 3.3	3.8	Н	0.72	0.7	1.7	2	1.9	2.4
Boron (Eiltered)	12	2100000	1 200 1 300	- 1	- 1	1 500	1 100 1 200	- 1	1 200	1 300	1 300	1 400	1 400	1 300	1 400	1 200	- 087	، د	- x	- 240	- 021	- 410	2 300
Cadmium	0 03	7	002,		002,1	000,-		\perp	002,	+	+	+	+	+	+	+	+	3 .	3 .	5 '	Ç,	2 '	2,300
Cadmium (Filtered)	0.03		<0.03 <0.03	03 <0.03	<0.03	<0.03	<0.03 0.04	<0.03	<0.03	+	<0.03	<0.03	<0.03	0.35 <0	<0.03 <0.03	+	╀	<0.03	0.04	<0.03	<0.03	<0.03	0.12
Chromium (hexavalent)	7		Z> Z>		L>	-<7		Ш	- 2	Н	Н	Н	Н	Н	Н	. <7		/>	<i>L</i> >	17	-2	-2	<7
Chromium	0.25		•			-	•				\dashv	+	Ц			+		2.6	1.9	<0.25	2.5	0.45	9.9
Chromium (Filtered)	0.25	ľ	1		-		•	'	+			+	+	+	+	+	+				'		
Copper (Filtered)	4 4 6	1130	- - - - - - - - - - - - - - - - - - -	- 0.4	- °0.4	- 0.4	<0.4 <0.4	- 0.4	- 40.4	-0.4	- 0.4	- 0.4)>		- 0> 4	+	- 6.1	4.2	- 0.4	- 0,4	- 0.4	0.8
Iron	5.5) N	-	L	1	-	-	L	1	1		-		H		-							
Iron (Filtered)	µg/L 5.5 1000	300000			02			23			10		-	240 1		H	28	130	48	51	20	28	1,900
Lead	60.0	390	- 0		, 6	. 0	- 0 0	, 0	, 6	- 0	. 00	- 0 27	+	+	- 00 00	- 00	+	. 5	, 0	, 6	1 0	- 00	. 5
Mercury	0.03	230	-	1	89.	60.0	-	1	? '	24.0	60.0	+		+	+	+	+	+	2 .	600	2 '	60.	5 '
Mercury (Filtered)	0.01	21	0.01 <0.01	0.02	<0.01	0.03	<0.01 <0.01	0.01	0.02	<0.01	0.01	0.03	0.01	0.01	0.03 0.02	2 0.01	0.01	\vdash	<0.01	0.02	10.0	0.01	<0.01
Nickel	0.5	2580	Н					Ц															
Nickel (Filtered)	0.5	2580	1.3	1.3	-		<0.5 2.4	9.0	1.5	4.7	0.5	+	+	+	+	1	+	2.8	2.8	3.4	4.	2	4.
Vanadium (Filtered)	hg/L 0.6 100	30000	2.9	2 0.8	- 0.6	- 0.6	- 9.0>	- 0.6	- 0.7	- 0.6	- 0.6	- 0.7	- 9.0>	- 6.0		<u>'</u>	· ·						
Zinc	1.3	2370	\vdash	L			-						H										
Zinc (Filtered)	µg/L 1.3	2370	<1.3 2.1	1.3	<1.3	<1.3	<1.3 7.3	3.9	6.9	13	4.3	2.6	<1.3	46 1	Н			8.2	9.5	<1.3	<1.3	41.3	2.1
1.2-dichloroethane	rganic compounds	3000	V		₹	⊽		₹		-	₹	ŀ	ŀ	ŀ	ŀ	ŀ	ŀ	₹	₹	₹	V	V	₹
1,2-dichloropropane	1	2400	Н	-	7	₹		۲			₽	-		H	H	H	H	7	7	٧	₹	₹	۲
Chloroform	hg/L 1 2.5	749	₹ ₹	- 5	<u> </u>	∑ <	, 6		, 6	. 6	. \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \	, 6	, 6	7 2	12 0			6 6	2 5	∑ <	₹ ₹	∑ <	
Phenols Monohydric	100	2310	-0,	1	20.0	,	-	7.0	,	-	2 -	+	+	+	+	+	+	9 '	7	, '	-	-	7
Aniline	1	360	Н	-	₹	⊽	•	₹			₹			7			₹	7	7	⊽	₹	₹	۲
Bis(2-ethylhexyl) phthalate	-	>SOL	₹	-	₹	⊽	•	₹	•		₹			1	1	1	1	⊽	₹	₹	₹	₹	1.1
Ammoniacal Nitrogen as N	mg/L	ŀ	-	6 8.5	4.1	6.5	8 7.7	5.3	150	20	17	12					Н	0.28	0.82	5.2	8.7	7.4	53
Cyanide Total	µg/L 0.1	300	56 52	2 61	47	49	41 41	<40 14	82	81	98	47	47	76	120 12	120 100	150	<40	<40	92	99	73	190
Thiocyanate (as SCN)	hg/L	2700	Н	Ц	5,500		•	17,000			000'09		22	0			<u>۳</u>	1,800	3,700	4,100	22,000	<20	000'99
Notes																							
	Not Analysed																						
X.XX	Concentration exceeds EQS	OS C																					
FOS X,XX	Concentration exceeds S Environmental Quality Sta	SAC and EQS																					
SSAC	Site Specific Assessment	Criteria																					
o c	Denotes shallow well installation	allation																					
D.	Deligies deeper well liesk	allagoli																					

No. 1, 1985 1.			MDL	ted Re		Area B بابارەغ				SBB_AUK_BH104	H104		w w	BB_AUK_BH				SBI	SBB_AUK_BH106	90	
No.		Well Ins	tallation			. 1000/20120	. 1000/2000	S	1000/2/000	0 1/202/2014	2 1000120120	- 1-	3 4/07/2024	.0027201	2004	- 1-	02 1606/20		170 100170	75 12024 36	7,707
Maintaine Main	etroleum Hydroca	rbons and Fi	el Indicators																	20210	
Mathematical Mat	C6 Aliphatics			4.55	1360	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	8
Marie Mari	C8 Aliphatics			4.55	1360	0.0	0.0	0.0	0.0	0.0	0.0	<u>6</u>	0.0	0.1	0.1	0.1	<u>6</u>	0.1	0.1	0.1	6
Marie Mari	C10 Allphatics			55.7	× SOL	0.0.1	0.7	0.7	0.0	0,	1.0	1.00	1.00	V0.1	0.1	1.0	V0.1	°0.1	0.1	°0.1	₽ ;
Continue	C12 Allphatics	hg/L		CC.	NSO.	·	· (v			5	·	,	· ,			· .		- 8	- :	v '
Composition	-C16 Allphatics	ng/L		00.4	700	-	7.	7	V	v	v	v	v	v	·	v	·	v	77		v
Continue	EC10 Aromatics	т	+	75	1360 1360	,	, 6	, ,	, 6	, 6	, 6	, 6	, 5	, ,	, ,	, 6	, 6	- 7	, 6	, 6	۱ ۲
Conference Con	AEC 10 Albination	hg/L		2 1	1260	7 6	7 6	7 6	7	7	7 0	7	7	7 5	7 5	7 0	7 0	7 6	7 0.	- 7	9 5
State Stat	0-EC 12 Aromatics	T		5.50	1360	7 7	7	7	7	7	7	7	7	7	7	7	7 7	7 7	7 7	7 7	2 2
The control of the co	Z-EC 10 Albination	T		00.1	200	,	,	7	7	7	,	,	,	7	7	7	7	7	7	7	7
No. 1 No. 1 No. 2 No.	6-ECZ1 Aromatics	T		ດີ	SOL.	· .	· ·				· ·	· ,	,	,	· ,	· ,	,	· ·		· ,	5
Marche Marche Marche Marche Marche Marche March Marche Ma	I-EC35 Aromatics		1	00.4	7.50F	,	,	,	,	7	,	7	7	7	7	7	- -	7	7	,	9
The control of the	ane	ng/L		φ;	2400	·	·	Į.				<u>.</u>	<u>,</u>	v .			į,	.,		·	` `
1	ne	hg/L		4 6	22200	Ş ,	Ş .	Ş ,	Ş ,	· ,	· ;	· ;	· ,	· ,	· ;	Ş ,	· ;	√ ;	- 5	m 7	7
Control Cont	Jenzene T : 1	Hg/L		07 0	0860	v	v	v	7	<u>-</u>	<u>,</u>	7	7	7	7	<u>-</u>	- -	7	- -	-	7
March Marc	e i otal	п		30	0888		-	•	-		1	-		-		-	-				1
Maintenness Main	alic Aromatic Hyd	arbons					200					200						ŀ		100	i
Part	thalene		+	2	669	0.16	0.95	0.28	0.13	0.34	40.05	0.05	3.8	1.0	80.0	-	40.05	+	<0.05	<0.05	-
	anthene		+	0063	1.89	×0.01	40.01	×0.01	×0.01	0.44	×0.01	10.01	4.2	×0.01	\$0.01	\$0.01	<0.01	+	<0.01	0.01	Ş.
Part Data	acene	- 1	+	0.1	200	<u><0.01</u>	<0.01	0.02	0.01	0.04	0.01	<0.01	<0.1	<0.01	0.02	<0.01	0.03	+	<0.01	0.01	0.01
Harting Line	o(a)pyrene	- 1	۱	/1000	0.0509	×0.01	×0.01	×0.01	<0.01	0.25	<0.01	<0.01	7	<0.01	<0.01	<0.01	<0.01	<0.01	0.08	<0.01	0
Heatery Mail Color Section Mail Color Mail Mail Color Mail			ŀ	20	0077										f	1	1	ŀ	ŀ	ŀ	ı
Figure 1 Figure 2 Figure 3	ile (Eitherson)	Т		3 2	7450	, 40				- 62	- 1			, 6	<u> </u>	, ,	, ,	, ,	, ,		، ا
Figure 10 Figure 11 Figure 12 Figure 12 Figure 12 Figure 13 Figure 13 Figure 14 Figure 14 Figure 14 Figure 15 Figure 14 Figure 14 Figure 15 Figu	ic (i literary)		ľ	000.	010000	2.	o.	0.	0.	2	=	7	2.	2.0	<u>t.</u>	2	2	7.	$^{+}$	1.7	١
	(Eilhorod)	H9/L			2100000	1 800	1 000	2 100	2000	000	53	810	12 000	13 000	12 000	3 800	13 000	12 000	$^{+}$	1 100	1 200
	inm inm	Т	+	0.0	2000	2	201	2	20,1	8	3		20017		200,71	200	200	2001	$^{+}$	2	<u> </u>
March Marc	ium (Filtorod)	Т	+	200	0.00	900	<0.02	<0.02	20.0	20.02	20.03	800	100	0.13	-000s	<0.05	<0.03	-0 03	200	120	٦
	num (hexavalent)	1,01	+	9.0	180	22.5	22.5	22.5	25.5	22.0	22.5	22.5	17	12.5	22.5	22.0	22.5	22.5	10.0	7.7	2 12
March Marc	mum (nevavarent)	1,61	ļ	90	28,	990	0.40	12		0 0	90	30.07	180	001		95.0	62	0.65	22	70.07	Č
Figure 1, 2, 2, 3, 6, 6, 1, 3, 6, 1, 1, 2, 1, 2, 1, 3, 6, 1, 3	mum (Eilforgd)	Т	+	900	2 6	2	71.0	7.	2	200	2.4	27.0	3			3	7.0	200	7.7	25.0	3
Figure 10 Figure 11 Figure 12 Figure 12 Figure 13 Figure 14 Figure 14 Figure 15 Figu	Illuiii (Filtereu)	Т	+	0.0	4130					·		+		+	+	+	+	<u> </u>			1
1911 5.5 1.000 2.0000 1.0 2.1				270	130		' ç	, ,	, ,	'		.	, ,	' 6	1	\ '\{	, ,	, 6			1
Figure F	(Lilieleu)			0/10	00000	-	+	9.	-	*:0/	9	9	2	5	7	* :0/	3	0.0	4:7	0	-
Here(b) Hore(b) Hore	4		+	000	200000	- 0	- 1					- 1	- 7		, 8	- 000	-			- 00	
Harter) High Long 1.3 3.90 Care	riftered)	П		000	300000	2,100	00/'/	150	28	016	9	06/	001,1	0LL	200	1,300	16	42	/40	087	-
Helerol Hele		- 1		1.3	390										-						1
High High Lord	(Filtered)			1.3	390	99'0	60.0>	0.52	0.64	60.0>	0.13	3.5	1.3	0.16	0.11	0.27	0.29	0.25	1.1	1.9	8.0
	Aır			20.0	21	,	1		,	,	,		,	,	,	,	,		,	,	•
Higher H	ury (Filtered)			70.0	21	0.02	<0.01	0.01	0.02	0.01	0.02	<0.01	0.03	0.04	0.04	0.02	0.02	0.04	0.03	<0.01	<0.01
Figle 15 15 15 15 15 15 15 1				8.6	2580																'
	(Filtered)	ı		8.6	2580	2.7	1.3	3.1	3	1.4	2.1	3.1	1.9	7.2	4.9	4,4	1.8	1.5	8.9	9.2	22
1 1 1 1 1 1 1 1 1 1	dium		-	100	30000						ļ.							,		,	ľ
Heled Help 13 13 13 13 13 13 13 1	dium (Eiltorod)		+	001	30000											+	1				ľ
Here() Hg/L 3	didili (Filieled)			2 2	30000						+	+	+	•	+	+	+	+	-		'
Iterach Iter		П	-	D.	23/0				.					-			.				1
And Semi Volatile Organic Compounds And Semi Vo	Filtered)	Jg.		7.9	2370	3.2	13	9	6.4	2.7	3.7	17	7.6	3.8	2.9	3.7	2.6	3.3	15	1.9	× 1.3
Monotylating Mono		ganic	spunodu																		
Monotypane Mon	ichloroethane	hg/L	_	10	3000	۲	7	₹	7	7	7	₹	⊽	₹	7	7	7	7	₹	7	٧
pg/L 11 2.5 749 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <th< td=""><td>chloropropane</td><td>hg/L</td><td></td><td>80</td><td>2400</td><td>۲</td><td>13</td><td>₹</td><td>7</td><td>₹</td><td>₹</td><td>₹</td><td>₹</td><td>₹</td><td>₩</td><td>7</td><td>₽</td><td>₹</td><td></td><td>₹</td><td>₹</td></th<>	chloropropane	hg/L		80	2400	۲	13	₹	7	₹	₹	₹	₹	₹	₩	7	₽	₹		₹	₹
1 1 1 1 1 2 2 2 2 2	oform	na/L		2.5	749	7	7	₹	7	₹	22	2	₹	7	7	7	7	₹	7	7	Į⊽
Monohydic lg/L io 777 2310	_	Т		7.7	2310	¢0 1	\$ 0 J	¢0 1	¢0 1	¢0.1	<0.1	<0.1	<0.1	¢0.1	×0.1	×0.1	×0.1	<0.1	<0.1	<0.1	0>
lg/L 1 1.2 360 <1 <1 <1 <2 <1 <1 <2 <1 <1 <2 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1 <1	ols Monohydric	т	ŀ	7.7	2310																'
1 13 250 12 41 13 250 14 15 41 41 180 58 69 57 40 71 260 160 94 190 440 43 280		т	+	1.0	360	7	7	7	7	?	7	7	?	7	7	7	7	7	7	2.8	7
Hart	offivilliavvill righted	Т		1 6		- 2	- \	7	-	, 5	- 7	+	1 5	+	+	+	- 7	- 7	. 7	5 7	7
mg/L 0.015 0.021 6.29 44 88 6.1 5.9 3.5 0.72 <0.015 7 <0.015 0.49 2.4 0.2 0.25 18 Igg/L 0.1 1 300 140 180 58 69 57 <40	nordanics	п		2														1	1		
	oniacal Nitroden as	//bu	L	021	6.20	44	88	6.1	20	3.5	0.72	<0.015	_	<0.015	0.49	2.4	0.2	0.25	h	20.015	9
007 Ct	de Total	1/6		170	300	140	180	, K	35	57	OV	77	280	160	200	190	740	43.	i	1 200	28.0
1 00 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Cyallide Total		_			2	200	3	200								,				5

	Not Analysed	Concentration exceeds EQS	Concentration exceeds SSAC and EQS	Environmental Quality Standard	Site Specific Assessment Criteria	Denotes shallow well installation	Denotes deeper well installation	
		x.xx	xx.x					
Notes				EQS	SSAC	S	۵	

n Hydrocarbonss and all cast an	Well Installation Saline EQS ample DateDat and Fuel Indicators Hg/L 0.1 4.55			SBB AUK BH107	SBB AUK BH107				SB	SBB AUK BH108	90	SB	B AUK BH10	60			X BBS X	SBB XXX BH204A		SBB XXX BH205	3H205
Petroleum Hydrocarhons and S-Ge Alphatics be Alphatics by Aleca Alphatics by Alphatics	ble DateDat d Fuel Indicators		SSAC (with D											D						∢	
S-C6 Alphatics ingl. Sec 8 Alphatics ingl. Sec 8 Alphatics ingl. Sec 10 Alp	1.0			12/07/2021 27/07/2021		29/07/2021 12	12/07/2021 27	7/07/2021 29	29/07/2021 14/	/07/2021 27	14/07/2021 27/07/2021 29/07/2021		07/2021 27/	07/2021 29/0		2021 29/07/		14/07/2021 27/07/2021	21 30/07/2021	27/07/2021 29/07/20	29/07/202
Abc 8 Alphatics ignl. 2-C10 Alphatics ignl. 210-C12 Alphatics ignl. 212-C16 Alphatics ignl. 212-C16 Alphatics ignl. 212-C16 Alphatics ignl. 2012-C10 Aromatics ignl. 2016-C12 Alphatics ignl. 2017-C12 Alphatics ignl. 20		.55	1360	¢0.1	<0.1	<0.1	¢0.1	40.1	<0.1	c0.1	¢0.1	<0.1	c0.1	Н	Н	Н	Н	Н	<0.1	<0.1	<0.1
2.E-C1 Alphatics Jup. 3.E-C1 Alphatics Jup. 17.0-C16 Alphatics Jup. 17.0-C17 Aromatics 17.0-C17 Ar	L.O.	.55	1360	0.1	-0- 	0.0	0.1	0.1	0.1	0.1	0.1	0.1	0.1	+	+	+	+	+	0.1	0.1	0.1
172-C16 Alphatics part (176-C16 Alphatics part (176-C16 Alphatics part (176-C16 Alphatics part (176-C16 Alphatics part (176-C17 Aromatics part (176-C17 Aromatics part (176-C16 Aromatics part (176-C1	1.0	4.55	>SOL	6.7	5. 2	- - - - -	Ç.0,	Ç.,	.0° 2	۰0.1		7 0.1	1.0	, , ,	, 0.1 2.0.1	4 4 3.2	- c	- - - -	-0, 2	6.7	0.7
716-C35 Alphaeites ingl. (C38-EC10 Anomatics ingl. (C10-EC10 Anomatics ingl. C10-EC10 Anomatics ingl. C10-EC16 Anomatics ingl. C21-EC35 Anomatics ingl. Anomatics in anom		3.5	>SOI	7 0	, v	7 7	7 \	7 5	, v	- E	7 7	7 \	6.3	+	+	+	+	+	7 5	7 0	7 8
COLECTO Adomatics inglicite (COLECTO Adomatic	-	55	, SOL				1			2 .			2 .	+	+	+	+	+			2 .
CO-EC12 Aromatics lugh. CO-EC12 Aromatics lugh. CO-EC13 Aromatics lugh. CO-EC25 Aromatics lugh. CO-EC25 Aromatics lugh. Increme lugh. Inchem.	0.1	55	1360	c0.1	c0.1	×0.1	¢0.1	<0.1	-0.1 -	¢0.1	¢0.1	<0.1	¢0.1	H	H	1.1	H	H	¢0.1	0.1	<0.1
CiC12-EC16 Aromatics lugi. CiC16-EC21 Aromatics lugi. CiC21-EC35 Aromatics lugi. Internet lugi.	-	4.55	1360	7	₹	7	7	7	7	7	7	7	7	H					18	٧	4.8
CCT6-EC21 Aromatics ingranged marzene lug/l marzene lug/l without lught	-	55	1360	2	₹	2	₹	2	2	2	2	2	7	L	H	-	H		41	₹	7.5
CC1-EC35 Aromatics ig/I snzene ig/I litere ig/I hylbenzene ig/I lene Total ig/I cyclic Aromatic Hydrocarbon	-	55	>SOL	2	2	7	7	7	2	2	7	7	7	H	H	H	H		6.9	7	19
inzene jug/l luene jug/l wybenzene jug/l lene Total jug/l ken Armatic Hydrocarbon jug/l pohthalene jug/l	-	4.55	>SOL	2	7	7	<u>^</u>	7	2	7	7	7	\ <u>\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\</u>	H	H	+	H	H	12	₹	7.1
luene µg/I ylbenzene µg/I lene Total µg/I cyclic Aromatic Hydrocarbon phthalene µg/I	-		2400	V	V	V	V	V	V	7	7	V	7	H	+	+	H	_	₹	V	٧
ylbenzene µg/I lene Total µg/I syclic Aromatic Hydrocarbon phthalene µg/I	-	74	22200	2	7	2	7	2	2	2	2	7	7	H	H	H	H	H	₹	7	₹
lene Total µg/l syclic Aromatic Hydrocarbon phthalene µg/l	-	0;	5990	2	₹	2	7	2	2	2	2	2	2						2	7	7
syclic Aromatic Hydrocarbon phthalene µg/I		30	8990		-									H	H	H	H	H		-	ŀ
phthalene µg/l																					
	0.05	2	599	0.34	<0.5	0.07	-	0.07	0.57	<0.05	ŀ	ŀ	ŀ	ŀ	ŀ	ŀ	ŀ	H	ŀ	0.07	1.8
Find anthene	0 01	0.0063	1 89	0.04	0.01	<0.01	0.03	0.03	0.00	\$0.07	+	╀	H	H					+	×0 0×	0.00
	0 01	ł	30	0 02	0 02	\$0.07 10.05	0 02	0 02	0 01	<0.04 0.04	40 O	<0.01	<0.01	0 01	<0.01	×0 0	01 <0.01	0 0 0	<0.01	0.02	000
ana	000	17	0.050.0	0.00	×0.04	×0.01	×0.01	0.02	<0.01 <0.01	0.08	H	+	H	+	ł	H			+	0 0v	O C
		ı									ł	1	ł	ı	ł	ł	ł	ı	ı		
Arsenic lua/L	0.16	35	7490	ŀ	ŀ	ŀ	ŀ	-	-	-	-	-	-	ŀ	ŀ	ŀ	ŀ	H	Ŀ	Ŀ	Ľ
(Filtered)	0.16	Š	7490	2.4	2.5	2.4	2.5	2.7	2.6	4.3	3.7	3.6	1.3	1-1	0.69	1.4	1.8	4.	1.4	2.1	2.1
	12	000	2100000			+					╀	╁	+	╀	+	+	+	+			<u>'</u>
Boron (Filtered) µg/L	12	7000	2100000	2,200	2,100	2,000	1,900	1,800	1,700	1,700	1,600	H	2,700	3,900	2,000 6,700	00, 2,300	00 1,400	0 830	1,800	009'6	9,900
	0.03	12	59.9								H	┝	H	┝	H	H		_	H		'
(Filtered)	0.03	1.2	59.9	<0.03	<0.03	0.07	<0.03	<0.03	<0.03	80'0	<0.03	<0.03	<0.03	<0.03	<0.03 <0.03	.03 <0.03	03 <0.03	3 <0.03	<0.03	<0.03	0 <u>.</u> 0×
Chromium (hexavalent) µg/L	7	9.0	180	2 >	L >	L >	2 >	L >	2 >		L	L			H	L	L		L	<i>L</i> >	L>
Chromium hg/L	0.25	9.	180	0.47	0.85	0.56	7.9	0.77	0.28	4.9										0.45	0.72
Chromium (Filtered) µg/L	0.25	9.0	180	-	-	-	-	-	_	-	Н	H	H	H	Н	Н	Н	H	H	-	-
	0.4	.76	1130																		•
Copper (Filtered) µg/L	0.4	.76	1130	0.5	-	0.7	0.4	<0.4	4.0>	6.0	<0.4	<0.4	<0.4	<0.4	1.2 <0.4	14 0.5	5 <0.4	4 0.7	<0.4	<0.4	<0.4
	5.5	000	300000		•		-	-	-	-		\dashv	+	$\frac{1}{1}$						'	1
Iron (Filtered) µg/L	5.5	000	300000	79	21	41	36	18	15	230	740	470	94	53		18 49	9 4,600		5,400	09	22
	60.0	e.	390								-		-	-	-	-	_	_	-		'
tered)	60.0	رن	390	0.11	0.23	0.17	0.12	60.0>	60.0>	0.43		60.0>			0.31 <0	<0.09 0.12	12 <0.09	19 0.41	60 O>	0.11	0.0>
	0.01	.07	21	,					,	1	_	1		_	_	_		_	_		1
ry (Filtered)	0.01	.07	21	60.0	0.05	90.0	0.1	0.08	0.08	<0.01		<0.01		<0.01	_	0.01 <0.01	•	10 0> 1	<0.01	0.02	0.02
	0.5	9.0	2580		•		•					-	+	\dashv	-	<u>'</u>	'		•	'	_
Nickel (Filtered) µg/L	0.5	9.0	2580	1.2	1.7	2.3	1.6	1.4	2	2.2	2.2	2.1	+	\dashv	2.5 0.	0.5	2.6		2.4	4.4	4.2
	9.0	8	30000		•		-	'		-			+	\dashv			'			'	1
adium (Filtered)	9.0	100	30000				-					-		+	-	+	+	+	-		'
	1.3	0.	2370					'			-	-	-	-	+		1	'			•
- 1	1.3	6	2370	4.	1.8	1.5	2.2	2	13	7.8	5.7	1.9	2.9	+	+	+	+	4	2	1.4	\ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \ \
latile Org	spunodwo													ŀ	ŀ	ŀ	ŀ	ŀ	l		
	_	10	3000	7	₹	7	7	7	7	7	₹	7	7						₹	₹	⊽
1,2-dichloropropane µg/L	-	80	2400	7	7	7	₹	7	7	7	7	2	2	7	<u>۲</u>	<u>-</u>	-	₹	7	7	₹
orm	-		749	7	7	7	7	₹	7	₹	<u>۲</u>	<u>۲</u>	<u>~</u>						₹	₹	⊽
	0.1		2310	<0.1	<0.1	×0.1	<0.1	0.16	<0.1	0.14	<0.1	×0.1	<0.1	+	1		_		<0.1	×0.1	0.0
	100	7.7	2310		-	-	-										'	'			'
Aniline µg/L	-	7.	360	₹	₹	₹	₹	₹	5	₹	₹	₹	₹	5	1		1		₹	⊽	⊽
/l) phthalate	-	<u>ر</u> .	>SOL	7	√	7	7	₹	7	7	7	₹	₹	1.6	+	-	+	-	₹	₹	4.1
														ŀ	ŀ		ŀ	H			
Ammoniacal Nitrogen as N mg/L	0.015	0.021	6.29	0.87).0	4.0		0.75	6.0	7 55	77	77 77	2.5	6/.0	1.9 0.13	40.015	7.4	8. 6	d.)	0.82	0.44
	- 6		300	440	48	040	450	470	200	000	130	040	240	+	+	+	4		440	240	0 4 0
Illiocyanate (as oon) hg/L	2	0	71.00	25	120	66	001	001	2007	000,00	20,000	720	070						020	200	426

Notes FQS SSAC

Redcar South Bank Table 3: Comparison of Measured Groundwater Con and SSAC	ed Groundwater	Concentrations	with EQS						ı	ı	ı	ı	ı	ı	ı	ı	ı	ı	ı	ı	ı	ı	
Compound	Units MDL Well Installation ample DateDat	pted ne EQS	Water S Resources S SSAC (with D dilution) 2	South Bank Area C SBC_AUK_BH101 D 21/06/2021 08/07/2	021		1/06/2021 08/	3/07/2021 20/	SBC D 07/2021 23/0	SBC_AUK_BH102 D 23/06/2021 09/07/	2021	S 20/07/2021 23/06	06/2021 09/07/2021			SBC_AUK_BH103 D 18/06/2021 08/07/2	3H103 08/07/2021 22/07/2021		S 23/06/2021 08/07/2021		SBC_AUK_BH104 D 1 09/07/2021 22/07	BH104	
Total Petroleum Hydrocarbon	s and Fuel Indicators	cators 4.55	1360	1.0	¢0.1	<0.1	¢0.1	<0.1													0.1	<0.1	
>CS-C8 Aliphatics	Т	4.55	136U >SOL	6.0	0.0	0.1	6.1	6. 1. 6.	0.1	0.0	0.1	0.1	0.1	0.10.10.1	0.0	0.0	0.0	0.0	0.1	6 6	0.0	0.1	_
>C10-C12 Aliphatics	hg/L 1	4.55	×SOL	7 7	₹ 5	7	7 7	7 ;													6.4	₹ ₹	
>C12-C16 Aliphatics	Hg/L 1	4.55	×SOL ×SOL	⊽ 0	2 .	·	⊽ 0	4.	+			+	+		+				+		9' -	·	_
>EC8-EC10 Aromatics	hg/L 0.1	4.55	1360	100	¢0.1	¢0.1	100	<0.1	+	+	+	+	+	+	╀			+	+	+	¢0.1	<0.1	_
>EC10-EC12 Aromatics	µg/L 1	4.55	1360	√ .	39	⊽	√ .	₹.	H	H	H	H							H		3.5	√ .	
>EC12-EC16 Aromatics	hg/L 1	4.55	1360 >SOI	⊽ ⊽	45 C	⊽ ⊽	⊽ ⊽	⊽ ⊽	+	+	+	+							+		14	চ	_
>EC21-EC35 Aromatics	Hg/L 1	4.55	×SOL	₹	2 2	7	₹	₹	+	+	+	+			+	-	+	+	+	+	2.5	₹₩	_
Benzene	hg/L 1	80	2400	⊽	7	₹	₹	₹	Н	Н	Н	Н	Н		Н	H	H	Н	Н		₹	₹	
Toluene	µg/L 1	74	22200	₹ 7	₹ 7	₹ 7	⊽ 7	₽ 7	H	\parallel	\parallel	\parallel	\parallel		H			\parallel	\parallel		₹ 7	₽ 7	
Xvlene Total	hg/L 1	30 20	2990	₹ (%)	√ .		₹ 8	· ·	+	+	+	+	+	+	+	+	+	+	+	+	·		_
Polycyclic Aromatic Hydrocar	bons	3		?			?		-		1	1	1	-	-					-			
Naphthalene		2	599	<0.1	11	20.0	2.7	5.9	H	Н	Н	Н	Н	Н	Н	Н	Н	Н	Н	H	0.09	<0.05	
Fluoranthene	µg/L 0.01	0.0063	1.89	0.22	0.03	0.02	1.3	0.01	<0.01	0.05	0.62 <	<0.01	0.01	0.02 <0.01	0.06	6 0.02	2 0.03	3 0.03	3 0.01	0.01	0.02	0.01	
Anthracene	Hg/L 0.01	0.0007	30	1.00	0.00	70.02	0.37	0.02				+	+	+	+	+	+	+	+	+	0.0	0.02	_
Metals		0.000	20000	2	0.07	0.07	200	0.07		ı	ı	1	ı	۱	۱	۱	ł	۱	۱	۱	200		
Arsenic		25	7490			ŀ	ŀ	-	H	-	ŀ	H	ŀ	H	H	H	H	H	H	H	ŀ	Ŀ	Ė
Arsenic (Filtered)		22	7490	1.1	78.0	1.2	2	0.89		1.7					3 0.62	2 0.82		9.0	99'0	0.7	1.9	5.3	
Boron		7000	2100000	. 099	- 0	- 2	- 6	- 007	+	- 070	+	+	- 00	+	+	+	+	+	+	+	- 1	- 00	
Soron (Filtered)	hg/L 12	000/	2100000	nec -	nec -	050	420	400 -	+	+	+	+	+	+	+	+	+	+	+	+	008,7	006,6	
Cadmium (Filtered)	µg/L 0.03	0.2	59.9	0.05	<0.03	<0.03	<0.03	<0.03	H	Н	<0.03	Ĥ	H	.03 <0.03	03 <0.03	H	3 <0.03	3 0.06	6 <0.03		<0.03	<0.03	
Chromium (hexavalent)		9.0	180	L>	2>	<u></u>	L>	2>		+	+				+	+			+		L> 4	7>	
Chromium (Fiffered)	ug/L 0.25	0.0	180	- 1-	4.7	2 .	<0.25	7.	+	+	+	+	+	+	+	+	+	- 048	+		04	c7.0>	_
Copper		3.76	1130				27.	+	+	+	+	+	+	+	+	+	+	+	+	+			_
Copper (Filtered)	hg/L 0.4	3.76	1130	-	<0.4	5.3	9.0	<0.4	5.8	Н	9.0		Н	1.1 9.7	7 0.4	Н	Н	H	<0.4	Н	×0.4	<0.4	
Iron	µg/L 5.5	1000	300000	- 000	- 00	- 00	- 070	- 22	-	+	+	+	+	+		+	+		+	+	- 42	. 2	_
Lead	Hg/L 0.09	1.3	390	200	20 -	006	0+0	3 '		+	+	+	+	+	+	+	+	+	+	+	2 -	_	_
Lead (Filtered)	П	1,3	390	0.74	60.0>	0.13	5.8	60.0					Н	Н						Н	60'0>	<0.09	
Mercury		0.07	21	, 6	, 6	, 6	, 5	, 6	+	+	+	+	+	+	+	+	+	+	+	+	. 5	4	
Mercury (Filtered)		0.0	25R0	0.03	10.0	10.0	10.01	10.0	+	+	+	+	+	+	+	+	+	+	+	+	2.5	21.0	
Nickel (Filtered)	ug/L 0.5	9.0	2580	2.4	2.1	. 8	<0.5	+	+	2.7	2.6	+	+	+	+	+	+	+	+	+	4.6	- =	_
Vanadium	1 1	100	30000						Н		Н	H	Н	Н	Н	Н	H	H		Н			
Vanadium (Filtered)	\neg	100	30000						+		+	+	+	+	+	+	+	+	+	+			_
Zinc (Filtered)	Hg/L 1.3	7.9	2370	- 9.9	2.6	6.7	- 01	5.6	5.1	- 12	4.1	29 3	3.2	2.1	2.2	- =	7.1	- 13	8.3	3.7	. 2.1.3	- 13	
Volatile and Semi Volatile Org	anic Compound	ş											ŀ										
1,2-dichloroethane	hg/L 1	0 8	3000	V .	v v	v	V V	V V	v 1	- - -	+	+	+	+	+	+		+	+	+	v v	v v	_
Chloroform	ug/L 1	2.5	749	7	7	7	, V	- - -	- - -	7 7	+	+	+	+	+	+	+	+	+	+	√	7	_
Phenol	П	7.7	2310	<0.1	<0.1	1.0>	<0.1	<0.1	×0.1	<0.1	Ĥ	Н	Н	Н	Н	Н		Н	Н	Н	<0.1	<0.1	
Phenols Monohydric	hg/L 100	7.7	2310	700	, ,	. 7	2007	, 5	, 2	00,7		+	+	+			1	+	+	+	. 7	. 7	_
Bis(2-ethylhexyl) phthalate	ug/L 1	1.3	>SOL	7 \	4.5	7 \	7 V	3.3	7 5	7 5	12 2	7 0	, v	41 2.5	2 2	7 7	7 \	7 \	7 7	7 \	5.3	7 -	_
Other Inorganics																							
Ammoniacal Nitrogen as N	mg/L 0.015	0.021	300	0.25	0.84	0.21	0.82	0.89	0.48	0.59	0.6	0.7 0.140	0.44 0.	76 0.67	7 0.49	8.1	0.17	0.6	0.91	0.9	1.9	0.21	
Thiocyanate (as SCN)	ug/L 20	- თ	2700	\$20	420	\$20	\$ 20	<20	² 20	<20	l	H	H	H	ł		ŀ		H	+	\$ 65	53	
M-4	1			2	3	2	2	3	3	3											3	3	
Notes -	Not Analysed																						
x.xx	Concentration exceeds EQS	xceeds EQS																					
XX.X	Concentration exceeds SSAC ar	exceeds SSAC	and EQS																				
SSAC	Site Specific As	sessment Crite	ria - ia																				
so c	Denotes shallow well installation	v well installation	LC :																				
ے	Denotes aeepe	r well installaut	E																				

and SSAC	Sign -	Wat		outh Bank Area C																				outh Bank
Compound			Resources SB	SBC_AUK_BH105		SBC	SBC_AUK_BH106					SBC_AUK	BH107					SBC_AUK_BH108	3H108				S	BC_AUK_E
	well Installation Somple DateDat	saine EQS SSA dilut	tion) 17	7/06/2021 07/07/	2021 20/07/2	D /2021 18/06/202	2021 08/07	2021 22/07	S 2021 18/06/	2021 08/07/2	021 22/07/20	D 21 17/06/2021 08/07/2	1 08/07/2021	122/07/2021	22/06/2021	08/07/2021	22/07/2021	17/06/2021		1/07/2021	s 17/06/2021 07		707/2021	23/06/2021
Total Petroleum Hydrocarbons and Fuel Indicators	rbons and Fuel Indica	ators	000	ŀ	ŀ	ŀ	ŀ	ŀ	ŀ	ŀ	H							Ş	Ş		ć	9		,
>C5-C6 Aliphatics	hg/L 0.1	4.55	1360	+	<0.1 <0 <0.1 <0 <0.0 <0.0 <0.0 <0.0 <0.0	\$0.1 \$0.1	+	×0.1	50.1	+	+	+	0,0	5 6	50.5	20.	v v	-0.	×0.1	- 6	- 0	- 0	- 0	- 0
>C8-C10 Aliphatics	Т	4.55	>SOL	+	+	+	+	+	ľ			+	0.0	0.0	4.5	140	₹	0.1	×0.1	0.0	0.1	0.0	0.1	0.1
>C10-C12 Aliphatics		4.55	>SOL	Н	Н		Н	Н	-			Н	₹	₹	₹	7.6	₹	2.1	2.7	₹	1.1	₹	₹	7
>C12-C16 Aliphatics	hg/L 1	4.55	×SOL	۲۰ م	+		-1	+	7 -	₽. S	₹	114	2.8	₹	₽ ?	6.3	₹	2.1	5.5	⊽		₽	₹	₽ ?
>FC8-FC10 Aromatics	Hg/L	4.55	1360 1360		+			+		+	+	+	- 00	- 6	300	320	320	04.0	- 00	- 6	50.1 CO	- 0	- 0	7 0
>EC10-EC12 Aromatics	\top	4.55	1360		., 5	+	1	+	1.0	H	+	+	- V	 	\$ ₹	1,200	4.000	- 8g	; v		788	; V		
>EC12-EC16 Aromatics	hg/L 1	4.55	1360		H	+	<u> </u>	H	2,			H	7	₹	⊽	640	2,100	32	7	⊽	24	₹	₹	₹
>EC16-EC21 Aromatics	µg/L 1	4.55	>SOL		L					H			⊽	۷	₹	30	41	63	7	⊽	32	₹	₹	₹
>EC21-EC35 Aromatics	µg/L 1	4.55	>SOL										۲	۲	۲	1.9	۲	40	۲	₹	21	₹	₹	₹
Benzene	µg/L 1	8	2400						2				30	42	1,800	1,700	2,100	₹	٧	⊽	7	7	₹	₹
Toluene	hg/L 1	74	22200	+	+	+	+	∑ ;		+	+	+	m 3	4 /	260	180	270	₹ 3	₹ ₹	⊽ 3	₹ 7	₹ 7	₹ 7	₹ 3
Xylone Total	hg/L '	200	2880	+	+	+	+	+	_		+	+	v	-	<u>5</u>	2	٥	7	v	v .	v (-	7 (7
Polycyclic Aramatic Hydraca	100	3		?							۱	-			701			?			?			?
Naphthalene	hg/L	2	599	H	H	H	ŀ	H	H	H	H	H	6	13	6,000	2,300	4,800	0.05	0.07	<0.05	0.31	0.3	<0.05	<0.05
Fluoranthene										0.64 0.22			0.03	0.02	2.8	0.94	0.83	<0.01	0.04	0.03	0.01	90'0	0.02	0.02
Anthracene	µg/L 0.01	0.1	30	0.04 0.0	0.04 0.0	0.07 0.0	0.02 0.	0.01 0.0	> 20.0	1	0.51	<0.01	0.03	0.03	4.7	4.	4.7	<0.01	<0.01	0.02	<0.01	0.16	0.05	<0.01
Benzo(a)pyrene	- 1	4		1	1	1	1	1	.01	J.0>	1	1	<0.01	<0.01	0.1	<0 <u>.01</u>	<0.01	<0.01	<0.01	<0.01	<0.01	0.04	0.11	<0.01
Metals		26	7400	-	-	-	-	-	-	ŀ	ŀ	ŀ								ľ	ı	ľ	ľ	
Arsenic (Filtered)	Hg/L 0.16	25	7490	. 6	- 16	- 2	0 21	- 690	0.47	+	+	- 0 74	0.79	- 860		. 5	, 6	0.35	- 000	0.45	- 032	. 6	- 2	0.52
Boron (mored)	µg/L 12	7000	100000	+		+	+	+	+	; '	+	+	; '	3	3 .	; ,	2 .	2 '	2 -	2 '	100	,	;	1
Boron (Filtered)		7000		18,000 19,0	19,000 22,0	22,000 40	400 47	470 22	220 50			420	460	420	290	300	270	250	190	290	240	20,000	26,000	260
Cadmium	µg/L 0.03	0.2	59.9	+	+	+	+	+	+	+	+	+	-		-		-		- 1					
Cadmium (Filtered)		0.2	59.9	0.04	<0.03	0.06	<0.03	<0.03 <0	<0.03 <0	+	+	+	<0.03	×0.03	0.12	0.05	0.1	<0.03	<0.03	¢0.03	<0.03	<0.03	\$0.03 1	¢0.03
Chromium (hexavalent)		9.0	180	+	+	+	+	+	/> //	+	+	+	/> //	75	73 57	/> 0	\ \ \ \ \	/> // 2C 0/	٠ بر	/> 4/	/>	/>	/v &	v
Chromium (Filtored)	hg/L 0.25	0.0	180	+	+	+	20 25	ł	+	+	+	+	0.37	7.7	5.4	0.7	0	C7.0>	2	C.	0.27	3	0.0	0.51
Copper		3.76	1130			; - -	+			_	+	+	· ·	3 '
Copper (Filtered)	Т	3.76	1130	-		0.1	1 2.2	-	_	+	+	+	40×	4.0>	1.2	<0.4	0.7	0.5	6.0	6.5	0.7	0.5	4.6	9.0
Iron	µg/L 5.5	1000	300000	Н	\prod				Н	1	-													
Iron (Filtered)		1000	300000	150 12	120 99	990	24 2	22 3	34 13	+	+	+	29	24	1,800	1,600	2,200	470	34	086	130	47	210	92
Lead	- 1	.3	390	- 0		' '		+		- 0	+	' 0	- 0	, 5		. 6	, (' 6	- 0	, 5		, 6	, 5	, 6
Merciny		700	21	+		+	+	61.0	+	+	6	+	60'0s	-	7.	20 -	<u> </u>	2.0	60.0>	64.	4 .	67.0	<u>8</u> '	07.0
Mercury (Filtered)		0.07	21	0.01	0.02 0.0	0.02 0.21		0.23 0.0	0.06	0.06	H	0.43	0.41	0.36	0.12	90.0	0.05	0.02	<0.01	0.01	0.05	60.0	80.0	0.21
Nickel		8.6	2580		H	Н		Н	Н			Н	-						-					
Nickel (Filtered)	µg/L 0.5	8.6	2580	1.9	2.5	17 1	1.7	2.3	1.6	_			2.1	3.8	19	12	15	1.2	2.3	2	1.7	2.5	1.3	1.3
Vanadium (Filhered)	hg/L 0.6	100	30000								+	1												
Zinc		7.9	2370		+	+			 -			ŀ		-	-	-								Ι.
(Filtered)		7.9	2370	10 3.	3.9	25 1.	1.6	9.7 4	1.4	1.3			1.5	2.7	12	39	73	5.2	18	17	5.5	8.5	2.3	12
Volatile and Semi Volatile O	g	S		ŀ	ŀ	ŀ	ŀ	ŀ	ŀ	ŀ	ŀ	ŀ												
1,2-dichloroethane	µg/L 1	10	3000	7 7	V 1	V \	V 1	v \	v \	√ 7 √ 7	7 7	7 5	7	7	₹ 7	₹ 7	7	⊽	⊽ ₹	₹ 7	7	₹ 7	√ ₹	⊽
Chloroform	Hg/L	2.5	749	+	+	+	+	+	+			+	7 \	7 \	, un	7 4	7 10	7 ⊽	7 =	, e	7 5	7 5	7 5	7 5
Phenol	гу.– µg/L 0.1	7.7	2310	-	-	-	\vdash	<u> </u>	H	H			3.1	27	⊽	360	066	- 0,1	<0.1	¢0.1	-0.1	₹	-0.1	-0.1
Phenols Monohydric		7.7	2310			Н	Н		Н								1							<100
Aniline		1.2	360	1	²²	<2.5	+	, 2 , 2			_		7	7	\$	2	7	⊽	₹ .	⊽	⊽	\$	⊽	₹
Bis(2-ethylhexyl) phthalate		1.3	>SOL	- - -	1	1	4	1	v - ⊽	Ĭ	-	1	₹	\$	\$	\$	5	₹	₹	₹	₹	\$	1.1	₹
Ammoniacal Nitrogen as N		0.021	6.29	0.08	0.52 0.5	0.54 0.6	0.64	H	<0.015	1 24	19	2.5	5.2	5.9	360	290	<0.015	0.34	0.11	0.16	0.51	0.3	0.27	0.7
Cyanide Total	µg/L 0.1	-	300					<40 <4	-	90 250			<40	<40	200	1,400	006	<40	<40	<40	<40	<40	<40	<40
Thiocyanate (as SCN)	µg/L 20	6	2700	-			_	+					<20	150	9,500	^{<20}	7,500	<20	<20	<20	<20	²⁰	<20	23
Notes																								
	Not Analysed																							
XX X	Concentration exceeds EQS	Coeds EQS																						

Not Analysed	Concentration exceeds EQS	Concentration exceeds SSAC and EQS	Environmental Quality Standard	Site Specific Assessment Criteria	Denotes shallow well installation	Denotes deeper well installation
i	x.xx	x.xx	EQS	SSAC	S	٥

Well institution and a per language of an oracle of Alphatics ingl. 0.1 4. 5-06-08 Alphatics ingl. 0.1 4. 5-06-02 Alphatics ingl. 0.1 4. 5-016-02 Alphatics ingl. 1. 1. 4. 5-016-02 Alphatics ingl. 1. 1. 5-016-02 Alphatics ingl. 1. 5-016-02 Anomatics ingl. 1. 4. 5-02 Anomatics ingl. 1. 4.	ample DateDat and Fuel Indicators 1g/L 0.1 4.55	Seounces Seounces								3C_AUK_BH	12			0) <	SBC_AUK_BH113			SBC_AUK_BH114
In Petroleum Hydrocarbons and Fuel GG-GB Aliphatics Igul. 0. GG-CB Aliphatics Igul. 0. GG-C10 Aliphatics Igul. 1. G1G-C16 Aliphatics Igul. 1. G1G-C16 Aliphatics Igul. 1. G1G-C16 Aliphatics Igul. 1. G1G-C16 Aliphatics Igul. 1. G1G-C16-C13 Aliphatics Igul. 1. EC14-EC12 Anomatics Igul. 1. EC14-EC13 Anomatics Igul. 1. EC14-EC16 Anomatics Igul. 1. EC14-EC35 Anomatics Igul. 2. EC14-EC35 Anomatics Igul. 2. EC14-EC35 Anomatics Igul. 2. EC14-EC35 Anomatics Igul. 2. EC14-EC45 Anomatics	1 Indicators 1 4.55	dilution)	07/07/2021	22/07/2021	17/06/2021 0	7/07/2021	2/07/2021 09	09/07/2021 22/07/2021	707/2021 18	1 18/06/2021 08/07/2021	07/2021 22	22/07/2021 08	08/07/2021 2:	1 120/2/2021	18/06/2021 09/07/2021 21	9/07/2021 2	/07/2021	18/06/2021
7/6ri 7/6ri 7/6ri 7/6ri 7/6ri 7/6ri 7/6ri 7/6ri 7/6ri 7/6ri			,	7	7	6	6	4		7	7	4	,	,	4	7		7
1,00H 1,00H 1,00H 1,00H 1,00H 1,00H 1,00H 1,00H		H	0,00	0,0	0.0	0.0	0.1	0.0	0.0	0.1	0.0	0.0	0.0	0,0	0.0	-0,0	0,00	0.0
7/6ri 7/6ri 7/6ri 7/6ri 7/6ri 7/6ri 7/6ri		>SOL	¢0.1	<0.1	0.1	0.1	0.1	¢0.1	¢0.1	¢0.1	¢0.1	-0.1	0.1	¢0.1	¢0.1	¢0.1	¢0.1	¢0.1
7/6ri 7/6ri 7/6ri 7/6ri 7/6ri 7/6ri			٧	٧	7	۲	۲	7	۲	∑	2.5	₹	₹	₹	6.2	₹	7	۲
1,011 118/L 118/L 118/L 118/L 118/L	4.55		7	۲	₹	2.5	⊽	⊽	⊽	₽	1.8	₹	2.5	7	39	₹	7	₹ :
Hg/L Hg/L Hg/L	+				2	'	'	1	'	8				. ;	22	. 6	. ;	3.5
	+	$\frac{1}{1}$, 0.1	v0.1	0.1	×0.1	1.0	1.0	, ,	V0.1	×0.1	c0.1	×0.1		×0.1	3.6	, ,	c0.1
	4.00 7.7.1	$\frac{1}{1}$	⊽ ₹	<u> </u>	5 2	<u>.</u>	v \	v	v	v 5	2.0	8 8	7 2	7	2	v \	⊽ ₹	33
	5.4	ļ	7 7	7 5	7.5	3 2	7 5	7 5	7 5	7 7	3 6	2 2	20	7 7	2 8	7 \	7 7	8 7
	55.4		7 5	7 5	5. 6	- 	, v	7 5	7 5	7 7	3.7	, v	3 2	7 5	2 7	, v	7 5	7 \
	8	H	. ^	V	7	V	·	· v	· V	₩ ₹	; v	V	V	\ \	V	V		₹
	74	22200	7	7	V	\ \ \	1	1	\ \ \ \	\ <u>\rank_{} \lank_{} \lank_{\text</u>	\ <u>\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\</u>	1	1	7	V	⊽	₹	\ <u>\</u>
Ethylbenzene Lig/L 1	70	5990	2	2	2	7	2	2	2	2	2	2	2	7	7	⊽	7	₹
	30	8990			8		-	-		8					9			က
olycyclic Aromatic Hydrocarbons																		
hg/L	Н		<0.05	<0.05	<0.05	<5	0.05	90.0	80.0	<0.05	0.15	13	0.17	0.13	<5	<0.05	<0.05	0.08
Fluoranthene µg/L 0.0	0.01 0.0063	3 1.89	<0.01	<0.01	<0.01	0.04	0.01	90'0	0.04	20.0	0.05	0.04	0.1	0.05	60'0	0.02	90.0	<0.01
hg/L	-		<0.01	<0 <u>.</u> 01	0.02	0.07	0.05	0.02	0,1	0.02	80.0	90.0	0.14	60.0	0.54	0.03	0.57	0.02
zo(a)pyrene µg/L	.01 0.00017	0.0509	<0.01	<0.01	<0.01	<0.01	<0.01	0.02	0.01	0.03	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01	<0.01
Descri	ŀ	7700				ŀ	ŀ	ŀ	-	-							ľ	
Arsenic (Fittered) 10.1	0.16	7490	- 0 44	- 0.59	- 26	- 23	. 15	3.4	. 8	- 049	0.49	0.57	- 0.87	. 60	- 10	. [- 4	-
1/01		210		2	2 '	2 '	;	; '	; '	2 '	2 '			;	; '	;		
(Filtered) µg/L	ŀ	21	65	92	20,000	24,000	27,000	2,200	2,100	270	370	320	470	470	520	650	069	860
hg/L	₀																	
(Filtered) µg/L			<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	<0.03	0.03	<0.03	<0.03	90.0	<0.03
(hexavalent) µg/L			L >	L >	L >	2 >	/ >	Z>	-2	Z>	<7>	2 >	L >	15	15	10	18	L >
hg/L	4		3.3	7.5	<0.25	72	0.38	29	19	2.1	1.1	0.89	4.4	7.8	<0.25	0.57	1.2	<0.25
ım (Filtered) µg/L	0.25 0.6	180								<0.25					0.25			0.82
	+	ł	, 6		' '	' ' '	, ,	' (' ;	, 6	, 6	' ' '	' ',	, ,	' 6	' (. ;	
J/B/L	+	ľ	0.0	7.7	6.0	40.4	<u>.</u>	4.0	4.0.	0.0	0.0	40.4	=	,	8.5	4.0	7.4	<u>`</u>
T/GH	2.5	200000	- 50		, 5	, 8	, ,	1 7	. 6	, 7	- 90	- 222	- 100	, 000	- 23	. 4	. 4	- 000
1/6/L	+	1	200	2	3	3	2	2	60	2	Se	120	26	720	5	3	2000	2000
	+	H	0 13	-	0.71	80.0>	0.12	000	00.0>	0.00	142	147	00.00	80.0		00.00	1.4	85.0
l GL	-	H																
(Filtered) ug/L	0.01 0.07	H	<0.01	0.01	0.03	0.04	0.01	0.15	0.14	0.1	0.13	0.02	90.0	90'0	<0.01	<0.01	0.01	<0.01
hg/L							-	-										
			-	1,5	1.7	2.9	1.6	1.9	2.6	2.8	3.5	2.8	က	3.3	1.2	-	4.1	4.4
Vanadium µg/L 0.6	.6 100	30000	,	,	1	,	,	,	1									
		°		1							-							•
J/Brl				-		-	-					'	'			,		
Zinc (Filtered) µg/L 1.3	3 7.9	2370	2.1	5.6	7.7	2.4	5.5	1.7	<1.3	4.5	7.1	2.6	₹ 2.3	9.1	ć. 2.	×1.3	11	9.6
gamic Ind/l	Compounds	3000	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7	7
1.2-dichloropropape	2 00	2400	7 7	7 5	7 \	7 \	7 5	7 5	7 \	7 7	7 \	7 0	7 7	7 5	7 \	7 \	7 5	7 \
	2.5	749	30	21	7	\ <u>\</u>		. 2	. <u>^</u>	- ▽	₽	∇	V	\ <u>\</u>	-	-	. 2	7
Phenol µg/L 0.1		2310	<0.1	<0.1	<0.1	<0.1	40.1	<0.1	<0.1	<0.1	<0.1	<0.1	0.16	0,72	<0.1	c0.1	¢0.1	<0.1
	100	2310	1			-	,			<100					<100			280
Aniline µg/L 1	1.2	360	7	۲	7	₹	7	7	<2 2	7	2	7	42	7	₹	7	7	7
Bis(2-ethylhexyl) phthalate µg/L 1	1.3	>S0L	7	۲	7	₹	⊽	⊽	2.9	₽	<2	₹	<2	7	⊽	1.4	7	₹
0		ŀ	,,,,	2000	100	0200	2000	h	0.045	0.75	, ,	00.0	0	0 0		ć	9	c c
Ammoniacal Nitrogen as N mg/L U.t.	0.015	300	0.14 <40	<0.015	41	46	54	0.099 <40	<0.015 94	<40	<40	0.58 <40	310	2.8	4 8	\$ \$\frac{4}{4}	87	01.7 02
S SCN) LIG/L	- 6	2700	\$20 \$20	\$20	<20	<20	\$ \$ \$ \$ \$ \$	+	<20	36	\$ \$ \$ \$	<20	¢20	51	27	\$20	\$ \$20	4.400

	x.xx x.xx	Not Analysed Concentration exceeds EQS Concentration exceeds SSAC and EQS
EQS SSAC S D		Environmental Quality Standard Site Specific Assessment Criteria Denotes shallow well installation Denotes deeper well installation

Pari Octavio		MDL		Water Resources	South Bank Area C SBC_AUK_BH115	Area C 3H115			SBC_AUK_BH116	BH116	
Compound	Well In	Well Installation	တ္ထ	SSAC (with		1000, 100, 100		4000100	A	A 27.00.0004 000.0004 000.000	24 (04
otal Petroleum Hydrocarbons and	s and F	Fuel Indicators				0110112021			110012021	202000	7110112021
>C5-C6 Aliphatics	hg/L	0.1	4.55	1360	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1	<0.1
>C6-C8 Aliphatics	hg/L	0.1	4.55	1360	<0.1	٥ <u>.</u> 1	<0.1	40 <u>.</u> 1	<0.1	×0.1	<u>0</u> .
>C8-C10 Aliphatics	hg/L	0.1	4.55	>SOL	¢0.1	0.1	٥٠.1	0.1	¢0.1	0.1	0.0
>C10-C12 Aliphatics	hg/L		4.55	NSOL.	· ·	· ·	₹ ·	·	· ·	Ş .	·
>C12-C16 Alliphatics	hg/L		6.4	705	· (-	v	v	- \	v	v
>FC8_FC10 Anomatics	10/L	-	4.55	1360 1360	7,00	. 6	- 07	. 6	7 0	. 0	. 6
>FC10-FC12 Aromatics	, i	-	7.5	1360	, V	, v	; V	; V	5 6	; v	; \
>EC12-EC16 Aromatics	1/pn	_	4.55	1360	. ₽	7	₹	₹	190	26	₹
>FC16-FC21 Aromatics	1/01	-	4.55	los^	. 2	₹	2	- √	93	3 ₹	₹
>EC21-EC35 Aromatics	1/pn	_	4.55	TOS<	Ý	₹	<u>^</u>	V	13	V	V
Benzene	ng/L	_	80	2400	4	₹	7	۲	7	₹	₹
Toluene	hg/L	Ļ	74	22200	۲	₹	₹	₹	۲	₹	₹
Ethylbenzene	hg/L	-	20	2990	7	₹	7	۲	7	۲	₹
Xylene Total	hg/L		30	8990	۷3				2	,	
olycyclic Aromatic Hydroca	rbons										
Naphthalene	hg/L	0.05	2	299	0.97		1.7	20	<0.05	0.09	°0.05
Fluoranthene	hg/L	0.01	0.0063	1.89	<0.01	0.01	¢0.01	⊽	0.12	0.13	0.03
Anthracene	hg/L	0.01	0.1	30	40 <u>.</u> 01	0.03	<0 <u>.</u> 01	1.6	0.49	0.27	0,13
Benzo(a)pyrene	hg/L	0.01	0.00017	0.0509	<0.01	<0.01	<0.01	₹	^{<0.01}	<0.01	×0.01
etals Amenia		9 40	30	7400							
Arsenic Amonio (Fittorod)	hg/L	0 0	6 2	7490		י פ	, ,	, ,	, ,	, ;	, [
Alseilic (Fillereu)	10/L	2 5	2007	210000	<u>+</u>	0.7	0.0	0.4	3.6	2	=
Boron (Eiltered)	10 L	1 5	2007	2100000	42,000	16,000	15,000	27 000	10,000	7 500	12 000
Cadmium	, i	003	200	59 9	12,000	200,0	200,5	20, 10	20,51	200.	2,000
Cadminm (Filtered)	1 /2	003	200	0.05	×0 03	×0 03	×0.03	\$0 03	\$0 03	\$0 0×	<0.03
Chromium (hexavalent)	1/01	_	9.0	180	2 >	2>	2>	2>	1 /2	- Z->	
Chromium	na/L	0.25	9.0	180	0.41	2.8	71	3.8	0.3	1.8	0.36
Chromium (Filtered)	na/L	0.25	9.0	180							
Copper	na/L	9.0	3.76	1130							
Copper (Filtered)	nd/L	9.4	3.76	1130	<0.4	40°	<0.4	5.2	<0.4	0.8	- 8:
lion	na/L	5.5	1000	300000				,			
Iron (Filtered)	na/L	5.5	1000	300000	80	180	290	97	580	81	630
Lead	na/L	60.0	1.3	390							Į.
Lead (Filtered)	hg/L	60.0	1.3	390	0.14	1.2	0.26	0.15	60.0>	0.12	0.32
Mercury	hg/L	0.01	0.07	21	,				,		
Mercury (Filtered)	hg/L	0.01	70.0	21	0.01	<0.01	<0.01	0.01	<0.01	<0.01	<0.01
Nickel	hg/L	0.5	8.6	2580							
Nickel (Filtered)	hg/L	9.5	8.6	2580	2.8	2.8	1.5	2.7	4.1	2.1	1.7
Vanadium	hg/L	9.0	100	30000	,			,	,		
Vanadium (Filtered)	hg/L	9.0	100	30000							
Zinc	hg/L	1.3	7.9	2370							
	hg/L	1.3	7.9	2370	2.9	18	23	2.1	3.2	8.9	4.8
latile and Semi Volatile Org	yanic Co	spunodwo									
1,2-dichloroethane	hg/L	1	i	3000	۲۷	۲	۲	۲	۲۷	۲	۲,
1,2-dichloropropane	hg/L	1	80	2400	۲	۲	7	7	۲	₹	7
Chloroform	hg/L	-	2.5	749	۲	۲	7	۲	۲		7
Phenol	hg/L	0.1	7.7	2310	<0.1	<0.1	7	<0.1	<0.1	<0.1	<0.1
Phenols Monohydric	hg/L	100	7.7	2310	•				•	•	
Aniline	hg/L	_	1.2	360	۲	<5	<10	<5	7	7	1.1
Bis(2-ethylhexyl) phthalate	hg/L	1	1.3	>SOL	۲۷	<2	<10	<5	۲۷	7	7
ther Inorganics											
Ammoniacal Nitrogen as N	mg/L	0.015	0.021	6.29	0.37	2.8	2.4	6.2	0.05	7.7	0.64
Cyanide Lotal	7/5/	-		2000	444	740	147	147	200	20:	200
1400		6		2020	ç	9	2 6	2	3 6	3 6	3 8

Appendix A

Study Limitations

IMPORTANT. This appendix should be read before reliance is placed on any of the information, opinions, advice, recommendations or conclusions contained in this report.

- 1 This report has been prepared by Arcadis (UK) Limited ('Arcadis'), with all reasonable skill, care and diligence within the terms of the Appointment and with the 10 resources and manpower agreed with South Tees Development Corporation (UK) Limited (the 'Client'). Arcadis does not accept responsibility for any matters outside the agreed scope.
- This report has been prepared for the sole benefit of the Client unless agreed otherwise in writing. otherwise in writing. The contents of this report may not be used or relied upon by any person other than this party without the express written consent and authorisation of Arcadis.
- 3 Unless stated otherwise, no consultations with authorities or funders or other interested third parties have been carried out. Arcadis is unable to give categorical assurance that the findings will be accepted by these third parties as such bodies may have unpublished, more stringent objectives. Further work may be required by these parties.
- All work carried out in preparing this report has used, and is based on, Arcadis' professional knowledge and understanding of current relevant legislation.

 Changes in legislation or regulatory guidance may cause the opinion or advice contained in this report to become inappropriate or incorrect. In giving opinions and advice, pending changes in legislation, of which Arcadis is aware, have been considered. Following delivery of the report, Arcadis has no obligation to advise the Client or any other party of such changes or their repercussions.
- 5 This report is only valid when used in its entirety. Any information or advice included in the report should not be relied upon until considered in the context of the whole report.
- Whilst this report and the opinions made are correct to the best of Arcadis' belief, Arcadis cannot guarantee the accuracy or completeness of any information provided by third parties. provided by third parties. Arcadis has taken reasonable steps to ensure that the information sources used for this assessment provided accurate information, and has therefore assumed this to be the case.
- 7 This report has been prepared based on the information reasonably available during the project programme. All information relevant to the scope may not have been received.
- 8 This report refers, within the limitations stated, to the condition of the site at the time of the inspection. No warranty is given as to the possibility of changes in

the condition of the site since the time of the investigation.

- 9 The content of this report represents the professional opinion of experienced environmental consultants. Arcadis does not provide specialist legal or other professional advice. The advice of other professionals may be required.
- Where intrusive investigation techniques have been employed they have been designed to provide a reasonable level of assurance on the conditions. Given the discrete nature of sampling, no investigation technique is capable of identifying all conditions present in all areas. In some cases the investigation is further limited by site operations, underground obstructions and above ground structures. Unless otherwise stated, areas beyond the boundary of the site have not been investigated.
- 11 If below ground intrusive investigations have been conducted as part of the scope, safe location of exploratory holes has been carried out with reference to the Arcadis ground disturbances procedure. No guarantee can be given that all services have been identified. Additional services, structures or other below ground obstructions, not indicated on the drawing, may be present on site.
- 12 Unless otherwise stated the report provides no comment on the nature of building materials, operational integrity of the facility or on any regulatory compliance issues.
- 13 Unless otherwise stated, an inspection of the site has not been undertaken and there may be conditions present at the site which have not been identified within the scope of this assessment.
- 14 Unless otherwise stated, samples from the site (soil, groundwater, building fabric or other samples) have not been obtained.
- 15 Arcadis has relied upon the accuracy of documents, oral information and other material and information provided by the Client and others, and Arcadis assumes no liability for the accuracy of such data, although in the event of apparent conflicts in information, Arcadis would highlight this and seek to resolve.
- 16 Unless otherwise stated, the scope of works has not included an environmental compliance review, health and safety compliance review, hazardous building materials assessment, interviews or contacting Local Authority, requests for information to the petroleum officer, sampling or analyses of soil, ground water, surface water, air or hazardous building materials or a chain of title review.
- 17 Unless otherwise stated, this assessment has considered the ongoing use of the site and has not been prepared for the purposes of redevelopment which may act as a trigger for site investigation and remediation works not needed for ongoing use.

Appendix B

Sensitivity Assessment

Appendix B


Sensitivity Testing

To account for the inherent uncertainty present when simplifying the environment for modelling purposes, a range of values was specified for each parameter adopted within the assessment. The dilution calculation model is set up using a value from each of the ranges; this value is not necessarily the final chosen value.

Each parameter is modified, one at a time, whilst maintaining the remaining parameters at the starting values to identify which parameters have the greatest effect on the site model.

The process is repeated to ensure the parameters selected are appropriate for the site conditions. The physical input value selection and sensitivity of each parameter are presented on the following sheet.



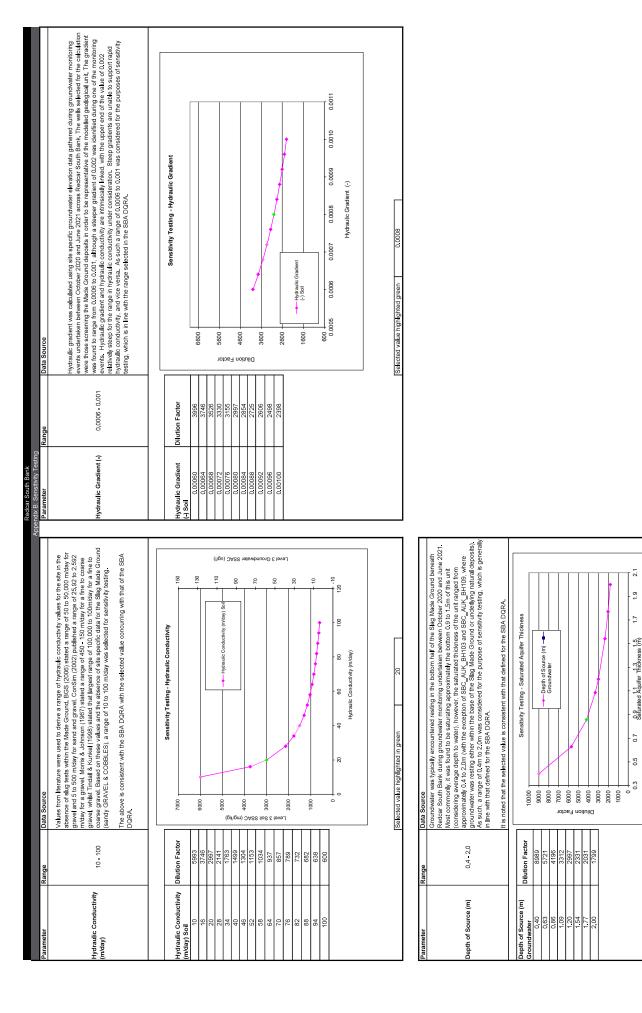

Appendix C

Physical Input Parameters



South Bar	South Bank, Redcar
Appendix C: Physic	Appendix C: Physical Input Parameters
Parameter	Parameter Value
Aquifer Lithology	Made Ground comprising sandy gravel and cobbles
Width of groundwater source (m)	5,000
Depth of groundwater source (m)	1.20
Hydraulic conductivity (m/day)	20
Hydraulic gradient (m/m)	0.0008
Calculated groundwater flow rate (m ³ /day)	96
River Gauging Station	River Tees (Leven Bridge & Low Moor)
Minimum monthly flow (m ³ /day)	287,626
Calculated dilution factor	2,997

Appendix D

Risk Assessment Methodology

Appendix D Risk Assessment Methodology

Non-statutory Regulatory Technical Guidance

The following documents, which have been consulted in undertaking this DQRA, present guiding principles in assessing potentially contaminated land:

General	Land Contamination: Risk Management (LCRM) (EA, 2020) available at:
	https://www.gov.uk/guidance/land-contamination-how-to-manage-the-risks (formerly
	CLR11: Model Procedures for the Management of Land Contamination (EA, 2004);
Water Resources	Remedial Targets Methodology (RTM): Hydrogeological Risk Assessment for Land
	Contamination (EA, 2006).

Calculating Evaluation Criteria

Water Resources

In order to estimate the risk to water resource receptors, fate and transport algorithms are used to predict a concentration at a defined receptor point, which is then compared to an appropriate water quality standard. A predicted concentration in excess of the water quality standard suggests the need to undertake a further level of investigation or action. Water resources SSAC are defined using a water quality standard at the point of compliance, then back-calculating to determine the contaminant level which is acceptable beneath the site in soils and/or groundwater.

The SSAC can be compared to the measured concentrations of the CoC to evaluate whether unacceptable risks are present, and with which pollutant linkage or linkages the unacceptable risks are associated.



Arcadis UK

1 Whitehall Riverside Leeds LS1 4BN

T: +44 (0)113 284 5333

arcadis.com